





<b>Material</b>	LED mounted on flexible PCB in silicone jacket
<b>Driver</b>	Remote Driver
<b>Life Time</b>	50,000 hours, L70 @ 25°C
<b>Ambient Temperature</b>	-20°C ~ 55°C
<b>IP Rating</b>	67, 68
<b>CRI</b>	≥ 80
<b>Min.Cutting Unit</b>	Monochrome : 55.6mm Dynamic White : 83.3mm
<b>Max. Continuous Length</b>	Monochrome : 15m (12W/m) Dynamic White : 10m (15W/m)
<b>Control Options</b>	Monochrome : 1-10V, DALI, DMX (Via Remote Driver) Dynamic White : DMX (Via Remote Driver)
<b>Weight (kg)</b>	0.5 kg/m

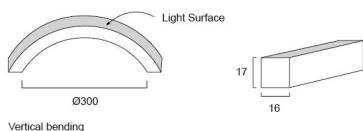


### SLN261-VB

Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
12W/m	2700K (565lm/m)	120°	24 Vdc
	3000K (565lm/m)		
	3500K (580lm/m)		
	4000K (580lm/m)		
	5700K (580lm/m)		
	Dynamic white		
	2200K-5700K (490lm/m)		
15W/m	2700K (700lm/m)		
	3000K (700lm/m)		
	3500K (800lm/m)		
	4000K (800lm/m)		
	5700K (800lm/m)		

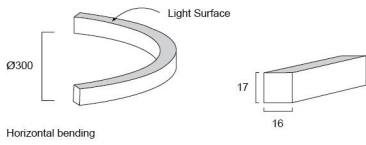


**SLN261-HB**

Watt (W)	CCT (K)	Beam Angle (°)	Input (V)
12W/m	2700K (470lm/m)	120°	24 Vdc
	3000K (470lm/m)		
	3500K (480lm/m)		
	4000K (480lm/m)		
	5700K (480lm/m)		
	Dynamic white		
	2200K-5700K (490lm/m)		
15W/m	2700K (600lm/m)		
	3000K (600lm/m)		
	3500K (700lm/m)		
	4000K (700lm/m)		
	5700K (700lm/m)		




**Accessories**


Injection-Moulded connector (E/S/B) + End cap




E = END



S = Side




B = Button




End Cap

**Aluminium Profile**




Serrated Aluminium Profile



Recess Serrated Aluminium Profile



Bendable Serrated Aluminium Profile



Thickened Plastic Profile