

Ø min: 68mm

min: 90mm

# 350mA - 500mA

## 6W - 9,5W



Perla-R Dark



IP68

500mA

IK10



### DESCRIPTION

Body made in solid anodized aluminum  
 Cover plate in stainless steel 316L or anodized aluminum  
 Degree of protection IP68, water depth up to 1m  
 Safety extra clear glass  
 Led module COB CRI>90 3SDCM 85.000hrs L80 B10  
 Provided with 1m cable  
 Max. 2140kg (21000 N)


### ACCESSORIES


Recessed box : Pop 10a/10b ref: X054A / X054B  
 Led driver AC/CC from 200mA to 500mA  
 Led driver DC/CC (12-36VDC/200mA to 500mA)  
 Anti-glare honeycomb - Louver ref: X060.050.3  
 IP68 connection : Connex 2 / 3 / 4

### ON REQUEST

Sandblasted glass  
 Led 3,2W 350mA 2700k / 3000K / 4000K / 5000K  
 Other cable length (customized)  
 Other cover plate dimensions (customized)

DARK

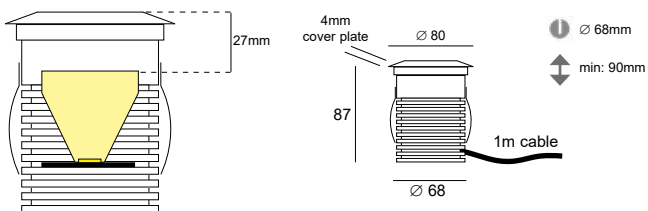

code: 362. **XX** **XXX** . **XX** 

led power color

max. efficacy 141lm/W

	Typical luminous flux (lm)	
	350mA 6W	500mA 9,5W
2700 K	725	995
3000 K	760	1035
4000 K	805	1095
5000 K	845	1150

LED	POWER	COLOR
27 2700K	910 9,5W - 10°	02A Anodized black
30 3000K	925 9,5W - 25°	16 Brushed stainless steel 316L
40 4000K	940 9,5W - 40°	32D Anodized aluminum
		33 Anodized bronze

5000K = on request  
 3,2W 350mA 2700K / 3000K / 4000K / 5000K = on request

# Perla-R Dark

Led uplighting



EXTERIOR LIGHTING  
FLOOR UPLIGHTING - Recessed