



NEW!
Mega BRONCO

BRONCO

- SURFACE DOWNLIGHT
- WALL UP-DOWNLIGHT



NEWLY Added
BRONCO

- SURFACE DOWNLIGHT
 - WALL UP-DOWNLIGHT
-




BRONCO is a contemporary slim luminaire family available as wall surface or ceiling mount configuration. The housing is made from extruded aluminum and enhanced LM6 die-cast aluminum which make it highly corrosion resistant to any extreme environment.

BRONCO is designed and tested under high ambient thermal condition. It is protected from the ingress of dust and water and can be used for both outdoor and indoor application.

The luminaire is equipped with high-power LED and is available in 2700K, 3000K, 4000K and RGBW option.

Optics are utilized to direct the light in wide variety of light distributions. **BRONCO** is an excellent choice for a widespread range of lighting tasks in modern architectural settings such as highlighting of columns, building facades and high ceilings.



www.unilamp.co.th/en/p/bronco


Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 Die Cast Aluminum and Extruded Aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Weather proof TPE grommet.
- Installation must be carried out according to the enclosed product manual.

Available Color



****Custom Colors is available as request.**

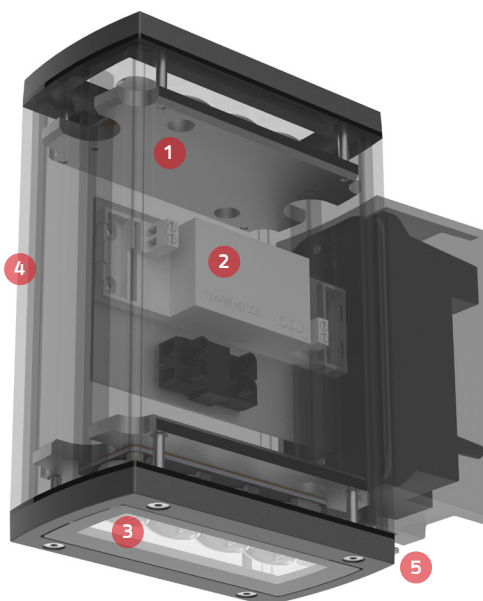


- 1. Heat Sink**
High purity aluminum heat sink attached to the body for fastest heat transfer.
- 2. Driver**
High quality LED constant current driver. Complied with Safety and EMC regulations.
- 3. LED**
LED and optical lens from world renowned manufacturer. Available in narrow, wide, forward throw and sharp elliptical 2700K, 3000K and 4000K CRI>80 3-Step SDCM.
- 4. Body Housing**
Corrosion resistant extruded aluminum housing with Nano Ceramic protection film.
- 5. Connector**
Supplied with detachable connector for easy installation.


BRONCO



BRONCO Wall Up/Downlight

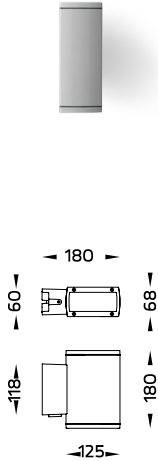

BRONCO Wall Downlight

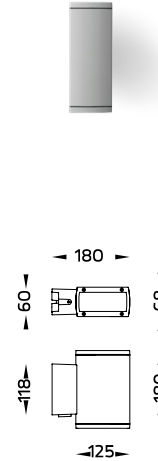

BRONCO Wall Up/Downlight

Application Type : Wall Up-Downlight

- BRONCO Wall Up/Downlight Narrow Beam / 5206
- BRONCO Wall Up/Downlight Wide Spread / 5207
- BRONCO Wall Up/Downlight Asymmetric / 5208
- BRONCO Wall Up/Downlight Narrow Beam/Wide Spread / 5209
- BRONCO Wall Up/Downlight Narrow Beam/Asymmetric / 5210
- BRONCO Wall Up/Downlight Wide Spread/Asymmetric / 5211
- BRONCO Wall Up/Downlight Blade Beam / 5213
- BRONCO Wall Up/Downlight Blade Beam/Wide Spread / 5214
- BRONCO Wall Up/Downlight Blade Beam/Asymmetric / 5215

Luminaire Performance

380 – 1780 lm
21 W
18 – 84 lm/W

Beam Options



Color Temperature

3000K/ 4000K

Controller

On-Off/ DALI

Input Options

220-240Vac 50/60Hz

BRONCO Wall Downlight

Application Type : Wall Up-Downlight

- BRONCO Wall Downlight Narrow Beam / 5203
- BRONCO Wall Downlight Wide Spread / 5204
- BRONCO Wall Downlight Asymmetric / 5205
- BRONCO Wall Downlight Blade Beam / 5212

Luminaire Performance

190 – 890 lm
11 W
17 – 80 lm/W

Beam Options



Color Temperature

3000K/ 4000K

Controller

On-Off/ DALI

Input Options

220-240Vac 50/60Hz



Mega BRONCO
Wall Up/Downlight

NEW!

Mega BRONCO
Wall Downlight





NEW!

Mega BRONCO
Wall Uplight

NEW!

Mega BRONCO
Surface Downlight

NEW!



Mega BRONCO

Application Type : Wall Up-Downlight / Surface Downlight

Mega BRONCO – Wall Up/Downlight / 5221

Mega BRONCO – Wall Downlight / 5222

Mega BRONCO – Wall Uplight / 5223

Mega BRONCO – Surface Downlight / 4222


Luminaire Performance

1120 – 5740 lm

19 – 55 W

50 – 111 lm/W

Beam Options



Color Temperature


2700/ 3000K/ 4000K/ RGBW

Controller

On-Off/ DALI/ DMX



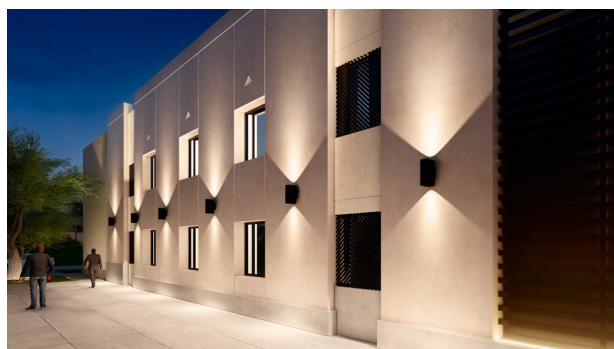













Input Options

220-240Vac 50/60Hz




BRONCO


BRONCO Wall Up/Downlight

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller			Ordering Code
									
OD-5206 	21 W	10°/43°	3000 K 4000 K	1570 lm 1660 lm	74 lm/W 79 lm/W	• •			5206-0-3-897-XX 5206-0-3-898-XX
OD-5207 	21 W	43°/10°	3000 K 4000 K	1540 lm 1640 lm	73 lm/W 78 lm/W	• •			5207-0-3-897-XX 5207-0-3-898-XX
OD-5208 	21 W	Asymmetric	3000 K 4000 K 3000 K	1670 lm 1780 lm 1670 lm	79 lm/W 84 lm/W 79 lm/W	• •	•		5208-0-3-897-XX 5208-0-3-898-XX 5208-0-5-897-XX
OD-5209 	21 W	10°/43°, 43°/10°	3000 K 4000 K	1560 lm 1650 lm	74 lm/W 78 lm/W	• •			5209-0-3-897-XX 5209-0-3-898-XX
OD-5210 	21 W	10°/43°, Asymmetric	3000 K 4000 K	1620 lm 1720 lm	77 lm/W 81 lm/W	• •			5210-0-3-897-XX 5210-0-3-898-XX
OD-5211 	21 W	43°/10°, Asymmetric	3000 K 4000 K 3000 K	1610 lm 1710 lm 1610 lm	76 lm/W 81 lm/W 76 lm/W	• •	•		5211-0-3-897-XX 5211-0-3-898-XX 5211-0-5-897-XX
OD-5213 	21 W	Sharp Elliptical V	3000 K 4000 K 3000 K 4000 K	380 lm 400 lm 380 lm 400 lm	18 lm/W 19 lm/W 18 lm/W 19 lm/W	• •	• •		5213-0-3-897-XX 5213-0-3-898-XX 5213-0-5-897-XX 5213-0-5-898-XX
OD-5214 	21 W	Sharp Elliptical V, 43°/10°	3000 K	1020 lm	48 lm/W	•			5214-0-3-897-XX
OD-5215 	21 W	Sharp Elliptical V, Asymmetric	3000 K	1080 lm	51 lm/W	•			5215-0-3-897-XX
OD-5203 	11 W	10°/43°	3000 K 4000 K 3000 K	780 lm 830 lm 780 lm	70 lm/W 75 lm/W 70 lm/W	• •	•		5203-0-3-897-XX 5203-0-3-898-XX 5203-0-5-897-XX
OD-5204 	11 W	43°/10°	3000 K 4000 K 4000 K	770 lm 820 lm 820 lm	70 lm/W 74 lm/W 74 lm/W	• •	•		5204-0-3-897-XX 5204-0-3-898-XX 5204-0-5-898-XX
OD-5205 	11 W	Asymmetric	3000 K 4000 K 3000 K	830 lm 890 lm 830 lm	75 lm/W 80 lm/W 75 lm/W	• •	•		5205-0-3-897-XX 5205-0-3-898-XX 5205-0-5-897-XX
OD-5212 	11 W	Sharp Elliptical V	3000 K 4000 K 3000 K 4000 K	190 lm 200 lm 190 lm 200 lm	17 lm/W 18 lm/W 17 lm/W 18 lm/W	• •	• •		5212-0-3-897-XX 5212-0-3-898-XX 5212-0-5-897-XX 5212-0-5-898-XX


BRONCO Wall Downlight

Mega BRONCO
Wall Up/Downlight

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller			Ordering Code
OD-5221 	36 W	10°	2700 K	3760 lm	104 lm/W	•			5221-A-3-393-XX
			3000 K	3760 lm	104 lm/W	•			5221-A-3-394-XX
			4000 K	4010 lm	111 lm/W	•			5221-A-3-395-XX
	36 W	16°/44°	2700 K	3760 lm	104 lm/W		•		5221-A-5-393-XX
			3000 K	3760 lm	104 lm/W		•		5221-A-5-394-XX
			4000 K	4010 lm	111 lm/W		•		5221-A-5-395-XX
	36 W	16°/44°	2700 K	3160 lm	87 lm/W	•			5221-N-3-393-XX
			3000 K	3160 lm	87 lm/W	•			5221-N-3-394-XX
			4000 K	3370 lm	93 lm/W	•			5221-N-3-395-XX
	36 W	27°	2700 K	3160 lm	87 lm/W		•		5221-N-5-393-XX
3000 K			3160 lm	87 lm/W		•		5221-N-5-394-XX	
4000 K			3370 lm	93 lm/W		•		5221-N-5-395-XX	
36 W	27°	2700 K	3340 lm	92 lm/W	•			5221-B-3-393-XX	
		3000 K	3340 lm	92 lm/W	•			5221-B-3-394-XX	
		4000 K	3560 lm	98 lm/W	•			5221-B-3-395-XX	
36 W	27°	2700 K	3340 lm	92 lm/W		•		5221-B-5-393-XX	
		3000 K	3340 lm	92 lm/W		•		5221-B-5-394-XX	
		4000 K	3560 lm	98 lm/W		•		5221-B-5-395-XX	
36 W	40°	2700 K	3340 lm	92 lm/W	•			5221-C-3-393-XX	
		3000 K	3340 lm	92 lm/W	•			5221-C-3-394-XX	
		4000 K	3560 lm	98 lm/W	•			5221-C-3-395-XX	
36 W	40°	2700 K	3340 lm	92 lm/W		•		5221-C-5-393-XX	
		3000 K	3340 lm	92 lm/W		•		5221-C-5-394-XX	
		4000 K	3560 lm	98 lm/W		•		5221-C-5-395-XX	
36 W	44°/16°	2700 K	3160 lm	87 lm/W	•			5221-H-3-393-XX	
		3000 K	3160 lm	87 lm/W	•			5221-H-3-394-XX	
		4000 K	3370 lm	93 lm/W	•			5221-H-3-395-XX	
36 W	44°/16°	2700 K	3160 lm	87 lm/W		•		5221-H-5-393-XX	
		3000 K	3160 lm	87 lm/W		•		5221-H-5-394-XX	
		4000 K	3370 lm	93 lm/W		•		5221-H-5-395-XX	
36 W	Asymmetric	2700 K	2240 lm	62 lm/W	•			5221-U-3-393-XX	
		3000 K	2240 lm	62 lm/W	•			5221-U-3-394-XX	
		4000 K	2390 lm	66 lm/W	•			5221-U-3-395-XX	
36 W	Asymmetric	2700 K	2240 lm	62 lm/W		•		5221-U-5-393-XX	
		3000 K	2240 lm	62 lm/W		•		5221-U-5-394-XX	
		4000 K	2390 lm	66 lm/W		•		5221-U-5-395-XX	
38 W	8°	3000 K	3280 lm	86 lm/W	•			5221-4-3-397-XX	
		3000 K	3280 lm	86 lm/W		•		5221-4-5-397-XX	
46 W	13° 13°/41° 26°	RGBW	3460 lm	75 lm/W			•	5221-A-6-440-XX	
		RGBW	3120 lm	67 lm/W			•	5221-N-6-440-XX	
		RGBW	3060 lm	66 lm/W			•	5221-B-6-440-XX	
		RGBW	2920 lm	63 lm/W			•	5221-C-6-440-XX	
		RGBW	3120 lm	67 lm/W			•	5221-H-6-440-XX	
50 W	13° 13°/41° 26° 36° 41°/13°	RGBW	3460 lm	69 lm/W		•		5221-A-5-440-XX	
		RGBW	3120 lm	62 lm/W		•		5221-N-5-440-XX	
		RGBW	3060 lm	61 lm/W		•		5221-B-5-440-XX	
		RGBW	2920 lm	58 lm/W		•		5221-C-5-440-XX	
		RGBW	3120 lm	62 lm/W		•		5221-H-5-440-XX	
55 W	10°	2700 K	5380 lm	97 lm/W	•			5221-A-3-387-XX	
		3000 K	5380 lm	97 lm/W	•			5221-A-3-388-XX	
		4000 K	5740 lm	104 lm/W	•			5221-A-3-389-XX	
		2700 K	5380 lm	97 lm/W		•		5221-A-5-387-XX	
55 W	10°	3000 K	5380 lm	97 lm/W		•		5221-A-5-388-XX	
		4000 K	5740 lm	104 lm/W		•		5221-A-5-389-XX	
		2700 K	4520 lm	82 lm/W	•			5221-N-3-387-XX	
		3000 K	4520 lm	82 lm/W	•			5221-N-3-388-XX	
55 W	16°/44°	4000 K	4830 lm	87 lm/W	•			5221-N-3-389-XX	
		2700 K	4520 lm	82 lm/W		•		5221-N-5-387-XX	
		3000 K	4520 lm	82 lm/W		•		5221-N-5-388-XX	
		4000 K	4830 lm	87 lm/W		•		5221-N-5-389-XX	
55 W	27°	2700 K	4780 lm	86 lm/W	•			5221-B-3-387-XX	
		3000 K	4780 lm	86 lm/W	•			5221-B-3-388-XX	
		4000 K	5100 lm	92 lm/W	•			5221-B-3-389-XX	
		2700 K	4780 lm	86 lm/W		•		5221-B-5-387-XX	
55 W	27°	3000 K	4780 lm	86 lm/W		•		5221-B-5-388-XX	
		4000 K	5100 lm	92 lm/W		•		5221-B-5-389-XX	
		2700 K	4780 lm	86 lm/W	•			5221-C-3-387-XX	
		3000 K	4780 lm	86 lm/W	•			5221-C-3-388-XX	
55 W	40°	4000 K	5100 lm	92 lm/W	•			5221-C-3-389-XX	
		2700 K	4780 lm	86 lm/W		•		5221-C-5-387-XX	
		3000 K	4780 lm	86 lm/W		•		5221-C-5-388-XX	
		4000 K	5100 lm	92 lm/W		•		5221-C-5-389-XX	
55 W	44°/16°	2700 K	4520 lm	82 lm/W	•			5221-H-3-387-XX	
		3000 K	4520 lm	82 lm/W	•			5221-H-3-388-XX	
		4000 K	4830 lm	87 lm/W	•			5221-H-3-389-XX	
		2700 K	4520 lm	82 lm/W		•		5221-H-5-387-XX	
55 W	44°/16°	3000 K	4520 lm	82 lm/W		•		5221-H-5-388-XX	
		4000 K	4830 lm	87 lm/W		•		5221-H-5-389-XX	
		2700 K	3200 lm	58 lm/W	•			5221-U-3-387-XX	
		3000 K	3200 lm	58 lm/W	•			5221-U-3-388-XX	
55 W	Asymmetric	4000 K	3420 lm	62 lm/W	•			5221-U-3-389-XX	
		2700 K	3200 lm	58 lm/W		•		5221-U-5-387-XX	
		3000 K	3200 lm	58 lm/W		•		5221-U-5-388-XX	
		4000 K	3420 lm	62 lm/W		•		5221-U-5-389-XX	

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller			Ordering Code
OD-5222 	19 W	8°	3000 K	1640 lm	86 lm/W	.	.		5222-4-3-397-XX
			3000 K	1640 lm	86 lm/W	.	.		5222-4-5-397-XX
	20 W	10°	2700 K	1880 lm	94 lm/W	.	.		5222-A-3-393-XX
			3000 K	1880 lm	94 lm/W	.	.		5222-A-3-394-XX
			4000 K	2000 lm	100 lm/W	.	.		5222-A-3-395-XX
			2700 K	1880 lm	94 lm/W	.	.		5222-A-5-393-XX
			3000 K	1880 lm	94 lm/W	.	.		5222-A-5-394-XX
			4000 K	2000 lm	100 lm/W	.	.		5222-A-5-395-XX
	20 W	16°/44°	2700 K	1580 lm	79 lm/W	.	.		5222-N-3-393-XX
			3000 K	1580 lm	79 lm/W	.	.		5222-N-3-394-XX
4000 K			1680 lm	84 lm/W	.	.		5222-N-3-395-XX	
2700 K			1580 lm	79 lm/W	.	.		5222-N-5-393-XX	
3000 K			1580 lm	79 lm/W	.	.		5222-N-5-394-XX	
4000 K			1680 lm	84 lm/W	.	.		5222-N-5-395-XX	
20 W	27°	2700 K	1670 lm	83 lm/W	.	.		5222-B-3-393-XX	
		3000 K	1670 lm	83 lm/W	.	.		5222-B-3-394-XX	
		4000 K	1780 lm	89 lm/W	.	.		5222-B-3-395-XX	
		2700 K	1670 lm	83 lm/W	.	.		5222-B-5-393-XX	
		3000 K	1670 lm	83 lm/W	.	.		5222-B-5-394-XX	
		4000 K	1780 lm	89 lm/W	.	.		5222-B-5-395-XX	
20 W	40°	2700 K	1670 lm	83 lm/W	.	.		5222-C-3-393-XX	
		3000 K	1670 lm	83 lm/W	.	.		5222-C-3-394-XX	
		4000 K	1780 lm	89 lm/W	.	.		5222-C-3-395-XX	
		2700 K	1670 lm	83 lm/W	.	.		5222-C-5-393-XX	
		3000 K	1670 lm	83 lm/W	.	.		5222-C-5-394-XX	
		4000 K	1780 lm	89 lm/W	.	.		5222-C-5-395-XX	
20 W	44°/16°	2700 K	1580 lm	79 lm/W	.	.		5222-H-3-393-XX	
		3000 K	1580 lm	79 lm/W	.	.		5222-H-3-394-XX	
		4000 K	1680 lm	84 lm/W	.	.		5222-H-3-395-XX	
		2700 K	1580 lm	79 lm/W	.	.		5222-H-5-393-XX	
		3000 K	1580 lm	79 lm/W	.	.		5222-H-5-394-XX	
		4000 K	1680 lm	84 lm/W	.	.		5222-H-5-395-XX	
20 W	Asymmetric	2700 K	1120 lm	56 lm/W	.	.		5222-U-3-393-XX	
		3000 K	1120 lm	56 lm/W	.	.		5222-U-3-394-XX	
		4000 K	1190 lm	59 lm/W	.	.		5222-U-3-395-XX	
		2700 K	1120 lm	56 lm/W	.	.		5222-U-5-393-XX	
		3000 K	1120 lm	56 lm/W	.	.		5222-U-5-394-XX	
		4000 K	1190 lm	59 lm/W	.	.		5222-U-5-395-XX	
28 W	13° 13°/41° 26° 36° 41°/13°	RGBW	1730 lm	61 lm/W	.	.		5222-A-5-440-XX	
		RGBW	1560 lm	55 lm/W	.	.		5222-N-5-440-XX	
		RGBW	1530 lm	54 lm/W	.	.		5222-B-5-440-XX	
		RGBW	1460 lm	52 lm/W	.	.		5222-C-5-440-XX	
		RGBW	1560 lm	55 lm/W	.	.		5222-H-5-440-XX	
29 W	13° 13°/41° 26° 36° 41°/13°	RGBW	1730 lm	59 lm/W	.	.		5222-A-6-440-XX	
		RGBW	1560 lm	53 lm/W	.	.		5222-N-6-440-XX	
		RGBW	1530 lm	52 lm/W	.	.		5222-B-6-440-XX	
		RGBW	1460 lm	50 lm/W	.	.		5222-C-6-440-XX	
		RGBW	1560 lm	53 lm/W	.	.		5222-H-6-440-XX	
30 W	10°	2700 K	2690 lm	89 lm/W	.	.		5222-A-3-387-XX	
		3000 K	2690 lm	89 lm/W	.	.		5222-A-3-388-XX	
		4000 K	2870 lm	95 lm/W	.	.		5222-A-3-389-XX	
		2700 K	2690 lm	89 lm/W	.	.		5222-A-5-387-XX	
		3000 K	2690 lm	89 lm/W	.	.		5222-A-5-388-XX	
30 W	16°/44°	4000 K	2870 lm	95 lm/W	.	.		5222-A-5-389-XX	
		2700 K	2260 lm	75 lm/W	.	.		5222-N-3-387-XX	
		3000 K	2260 lm	75 lm/W	.	.		5222-N-3-388-XX	
		4000 K	2410 lm	80 lm/W	.	.		5222-N-3-389-XX	
		2700 K	2260 lm	75 lm/W	.	.		5222-N-5-387-XX	
30 W	27°	3000 K	2260 lm	75 lm/W	.	.		5222-N-5-388-XX	
		4000 K	2410 lm	80 lm/W	.	.		5222-N-5-389-XX	
		2700 K	2390 lm	79 lm/W	.	.		5222-B-3-387-XX	
		3000 K	2390 lm	79 lm/W	.	.		5222-B-3-388-XX	
		4000 K	2550 lm	85 lm/W	.	.		5222-B-3-389-XX	
30 W	40°	2700 K	2390 lm	79 lm/W	.	.		5222-B-5-387-XX	
		3000 K	2390 lm	79 lm/W	.	.		5222-B-5-388-XX	
		4000 K	2550 lm	85 lm/W	.	.		5222-B-5-389-XX	
		2700 K	2390 lm	79 lm/W	.	.		5222-C-3-387-XX	
		3000 K	2390 lm	79 lm/W	.	.		5222-C-3-388-XX	
30 W	44°/16°	4000 K	2550 lm	85 lm/W	.	.		5222-C-3-389-XX	
		2700 K	2390 lm	79 lm/W	.	.		5222-C-5-387-XX	
		3000 K	2390 lm	79 lm/W	.	.		5222-C-5-388-XX	
		4000 K	2550 lm	85 lm/W	.	.		5222-C-5-389-XX	
		2700 K	2260 lm	75 lm/W	.	.		5222-H-3-387-XX	
30 W	Asymmetric	3000 K	2260 lm	75 lm/W	.	.		5222-H-3-388-XX	
		4000 K	2410 lm	80 lm/W	.	.		5222-H-3-389-XX	
		2700 K	2260 lm	75 lm/W	.	.		5222-H-5-387-XX	
		3000 K	2260 lm	75 lm/W	.	.		5222-H-5-388-XX	
		4000 K	2410 lm	80 lm/W	.	.		5222-H-5-389-XX	
30 W	Asymmetric	2700 K	1600 lm	53 lm/W	.	.		5222-U-3-387-XX	
		3000 K	1600 lm	53 lm/W	.	.		5222-U-3-388-XX	
		4000 K	1710 lm	57 lm/W	.	.		5222-U-3-389-XX	
		2700 K	1600 lm	53 lm/W	.	.		5222-U-5-387-XX	
		3000 K	1600 lm	53 lm/W	.	.		5222-U-5-388-XX	
			4000 K	1710 lm	57 lm/W	.	.		5222-U-5-389-XX

Mega BRONCO
Wall Uplight

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller			Ordering Code
OD-5223 	19 W	8°	3000 K	1640 lm	86 lm/W	.	.		5223-4-3-397-XX
			3000 K	1640 lm	86 lm/W	.	.		5223-4-5-397-XX
	20 W	10°	2700 K	1880 lm	94 lm/W	.	.		5223-A-3-393-XX
			3000 K	1880 lm	94 lm/W	.	.		5223-A-3-394-XX
			4000 K	2000 lm	100 lm/W	.	.		5223-A-3-395-XX
			2700 K	1880 lm	94 lm/W	.	.		5223-A-5-393-XX
			3000 K	1880 lm	94 lm/W	.	.		5223-A-5-394-XX
			4000 K	2000 lm	100 lm/W	.	.		5223-A-5-395-XX
	20 W	16°/44°	2700 K	1580 lm	79 lm/W	.	.		5223-N-3-393-XX
			3000 K	1580 lm	79 lm/W	.	.		5223-N-3-394-XX
4000 K			1680 lm	84 lm/W	.	.		5223-N-3-395-XX	
2700 K			1580 lm	79 lm/W	.	.		5223-N-5-393-XX	
3000 K			1580 lm	79 lm/W	.	.		5223-N-5-394-XX	
4000 K			1680 lm	84 lm/W	.	.		5223-N-5-395-XX	
20 W	27°	2700 K	1670 lm	83 lm/W	.	.		5223-B-3-393-XX	
		3000 K	1670 lm	83 lm/W	.	.		5223-B-3-394-XX	
		4000 K	1780 lm	89 lm/W	.	.		5223-B-3-395-XX	
		2700 K	1670 lm	83 lm/W	.	.		5223-B-5-393-XX	
		3000 K	1670 lm	83 lm/W	.	.		5223-B-5-394-XX	
		4000 K	1780 lm	89 lm/W	.	.		5223-B-5-395-XX	
20 W	40°	2700 K	1670 lm	83 lm/W	.	.		5223-C-3-393-XX	
		3000 K	1670 lm	83 lm/W	.	.		5223-C-3-394-XX	
		4000 K	1780 lm	89 lm/W	.	.		5223-C-3-395-XX	
		2700 K	1670 lm	83 lm/W	.	.		5223-C-5-393-XX	
		3000 K	1670 lm	83 lm/W	.	.		5223-C-5-394-XX	
		4000 K	1780 lm	89 lm/W	.	.		5223-C-5-395-XX	
20 W	44°/16°	2700 K	1580 lm	79 lm/W	.	.		5223-H-3-393-XX	
		3000 K	1580 lm	79 lm/W	.	.		5223-H-3-394-XX	
		4000 K	1680 lm	84 lm/W	.	.		5223-H-3-395-XX	
		2700 K	1580 lm	79 lm/W	.	.		5223-H-5-393-XX	
		3000 K	1580 lm	79 lm/W	.	.		5223-H-5-394-XX	
		4000 K	1680 lm	84 lm/W	.	.		5223-H-5-395-XX	
20 W	Asymmetric	2700 K	1120 lm	56 lm/W	.	.		5223-U-3-393-XX	
		3000 K	1120 lm	56 lm/W	.	.		5223-U-3-394-XX	
		4000 K	1190 lm	59 lm/W	.	.		5223-U-3-395-XX	
		2700 K	1120 lm	56 lm/W	.	.		5223-U-5-393-XX	
		3000 K	1120 lm	56 lm/W	.	.		5223-U-5-394-XX	
		4000 K	1190 lm	59 lm/W	.	.		5223-U-5-395-XX	
28 W	13° 13°/41° 26° 36° 41°/13°	RGBW	1730 lm	61 lm/W	.	.		5223-A-5-440-XX	
		RGBW	1560 lm	55 lm/W	.	.		5223-N-5-440-XX	
		RGBW	1530 lm	54 lm/W	.	.		5223-B-5-440-XX	
		RGBW	1460 lm	52 lm/W	.	.		5223-C-5-440-XX	
		RGBW	1560 lm	55 lm/W	.	.		5223-H-5-440-XX	
29 W	13° 13°/41° 26° 36° 41°/13°	RGBW	1730 lm	59 lm/W	.	.		5223-A-6-440-XX	
		RGBW	1560 lm	53 lm/W	.	.		5223-N-6-440-XX	
		RGBW	1530 lm	52 lm/W	.	.		5223-B-6-440-XX	
		RGBW	1460 lm	50 lm/W	.	.		5223-C-6-440-XX	
		RGBW	1560 lm	53 lm/W	.	.		5223-H-6-440-XX	
30 W	10°	2700 K	2690 lm	89 lm/W	.	.		5223-A-3-387-XX	
		3000 K	2690 lm	89 lm/W	.	.		5223-A-3-388-XX	
		4000 K	2870 lm	95 lm/W	.	.		5223-A-3-389-XX	
		2700 K	2690 lm	89 lm/W	.	.		5223-A-5-387-XX	
		3000 K	2690 lm	89 lm/W	.	.		5223-A-5-388-XX	
30 W	16°/44°	4000 K	2870 lm	95 lm/W	.	.		5223-A-5-389-XX	
		2700 K	2260 lm	75 lm/W	.	.		5223-N-3-387-XX	
		3000 K	2260 lm	75 lm/W	.	.		5223-N-3-388-XX	
		4000 K	2410 lm	80 lm/W	.	.		5223-N-3-389-XX	
		2700 K	2260 lm	75 lm/W	.	.		5223-N-5-387-XX	
30 W	27°	3000 K	2260 lm	75 lm/W	.	.		5223-N-5-388-XX	
		4000 K	2410 lm	80 lm/W	.	.		5223-N-5-389-XX	
		2700 K	2390 lm	79 lm/W	.	.		5223-B-3-387-XX	
		3000 K	2390 lm	79 lm/W	.	.		5223-B-3-388-XX	
		4000 K	2550 lm	85 lm/W	.	.		5223-B-3-389-XX	
30 W	40°	2700 K	2390 lm	79 lm/W	.	.		5223-B-5-387-XX	
		3000 K	2390 lm	79 lm/W	.	.		5223-B-5-388-XX	
		4000 K	2550 lm	85 lm/W	.	.		5223-B-5-389-XX	
		2700 K	2390 lm	79 lm/W	.	.		5223-C-3-387-XX	
		3000 K	2390 lm	79 lm/W	.	.		5223-C-3-388-XX	
30 W	44°/16°	4000 K	2550 lm	85 lm/W	.	.		5223-C-3-389-XX	
		2700 K	2390 lm	79 lm/W	.	.		5223-C-5-387-XX	
		3000 K	2390 lm	79 lm/W	.	.		5223-C-5-388-XX	
		4000 K	2550 lm	85 lm/W	.	.		5223-C-5-389-XX	
		2700 K	2260 lm	75 lm/W	.	.		5223-H-3-387-XX	
30 W	Asymmetric	3000 K	2260 lm	75 lm/W	.	.		5223-H-3-388-XX	
		4000 K	2410 lm	80 lm/W	.	.		5223-H-3-389-XX	
		2700 K	2260 lm	75 lm/W	.	.		5223-H-5-387-XX	
		3000 K	2260 lm	75 lm/W	.	.		5223-H-5-388-XX	
		4000 K	2410 lm	80 lm/W	.	.		5223-H-5-389-XX	
30 W	Asymmetric	2700 K	1600 lm	53 lm/W	.	.		5223-U-3-387-XX	
		3000 K	1600 lm	53 lm/W	.	.		5223-U-3-388-XX	
		4000 K	1710 lm	57 lm/W	.	.		5223-U-3-389-XX	
		2700 K	1600 lm	53 lm/W	.	.		5223-U-5-387-XX	
		3000 K	1600 lm	53 lm/W	.	.		5223-U-5-388-XX	
4000 K	1710 lm	57 lm/W	.	.		5223-U-5-389-XX			

BRONCO

Mega BRONCO
Surface Downlight

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller			Ordering Code
OD-4222 	19 W	8°	3000 K	1640 lm	86 lm/W	.	.	.	4222-4-3-397-XX
			3000 K	1640 lm	86 lm/W	.	.	.	4222-4-5-397-XX
	20 W	10°	2700 K	1880 lm	94 lm/W	.	.	.	4222-A-3-393-XX
			3000 K	1880 lm	94 lm/W	.	.	.	4222-A-3-394-XX
			4000 K	2000 lm	100 lm/W	.	.	.	4222-A-3-395-XX
			2700 K	1880 lm	94 lm/W	.	.	.	4222-A-5-393-XX
			3000 K	1880 lm	94 lm/W	.	.	.	4222-A-5-394-XX
			4000 K	2000 lm	100 lm/W	.	.	.	4222-A-5-395-XX
	20 W	16°/44°	2700 K	1580 lm	79 lm/W	.	.	.	4222-N-3-393-XX
			3000 K	1580 lm	79 lm/W	.	.	.	4222-N-3-394-XX
4000 K			1680 lm	84 lm/W	.	.	.	4222-N-3-395-XX	
2700 K			1580 lm	79 lm/W	.	.	.	4222-N-5-393-XX	
3000 K			1580 lm	79 lm/W	.	.	.	4222-N-5-394-XX	
4000 K			1680 lm	84 lm/W	.	.	.	4222-N-5-395-XX	
20 W	27°	2700 K	1670 lm	83 lm/W	.	.	.	4222-B-3-393-XX	
		3000 K	1670 lm	83 lm/W	.	.	.	4222-B-3-394-XX	
		4000 K	1780 lm	89 lm/W	.	.	.	4222-B-3-395-XX	
		2700 K	1670 lm	83 lm/W	.	.	.	4222-B-5-393-XX	
		3000 K	1670 lm	83 lm/W	.	.	.	4222-B-5-394-XX	
		4000 K	1780 lm	89 lm/W	.	.	.	4222-B-5-395-XX	
20 W	40°	2700 K	1670 lm	83 lm/W	.	.	.	4222-C-3-393-XX	
		3000 K	1670 lm	83 lm/W	.	.	.	4222-C-3-394-XX	
		4000 K	1780 lm	89 lm/W	.	.	.	4222-C-3-395-XX	
		2700 K	1670 lm	83 lm/W	.	.	.	4222-C-5-393-XX	
		3000 K	1670 lm	83 lm/W	.	.	.	4222-C-5-394-XX	
		4000 K	1780 lm	89 lm/W	.	.	.	4222-C-5-395-XX	
20 W	44°/16°	2700 K	1580 lm	79 lm/W	.	.	.	4222-H-3-393-XX	
		3000 K	1580 lm	79 lm/W	.	.	.	4222-H-3-394-XX	
		4000 K	1680 lm	84 lm/W	.	.	.	4222-H-3-395-XX	
		2700 K	1580 lm	79 lm/W	.	.	.	4222-H-5-393-XX	
		3000 K	1580 lm	79 lm/W	.	.	.	4222-H-5-394-XX	
		4000 K	1680 lm	84 lm/W	.	.	.	4222-H-5-395-XX	
20 W	Asymmetric	2700 K	1120 lm	56 lm/W	.	.	.	4222-U-3-393-XX	
		3000 K	1120 lm	56 lm/W	.	.	.	4222-U-3-394-XX	
		4000 K	1190 lm	59 lm/W	.	.	.	4222-U-3-395-XX	
		2700 K	1120 lm	56 lm/W	.	.	.	4222-U-5-393-XX	
		3000 K	1120 lm	56 lm/W	.	.	.	4222-U-5-394-XX	
		4000 K	1190 lm	59 lm/W	.	.	.	4222-U-5-395-XX	
28 W	13° 13°/41° 26° 36° 41°/13°	RGBW	1730 lm	61 lm/W	.	.	.	4222-A-5-440-XX	
		RGBW	1560 lm	55 lm/W	.	.	.	4222-N-5-440-XX	
		RGBW	1530 lm	54 lm/W	.	.	.	4222-B-5-440-XX	
		RGBW	1460 lm	52 lm/W	.	.	.	4222-C-5-440-XX	
		RGBW	1560 lm	55 lm/W	.	.	.	4222-H-5-440-XX	
29 W	13° 13°/41° 26° 36° 41°/13°	RGBW	1730 lm	59 lm/W	.	.	.	4222-A-6-440-XX	
		RGBW	1560 lm	53 lm/W	.	.	.	4222-N-6-440-XX	
		RGBW	1530 lm	52 lm/W	.	.	.	4222-B-6-440-XX	
		RGBW	1460 lm	50 lm/W	.	.	.	4222-C-6-440-XX	
		RGBW	1560 lm	53 lm/W	.	.	.	4222-H-6-440-XX	
30 W	10°	2700 K	2690 lm	89 lm/W	.	.	.	4222-A-3-387-XX	
		3000 K	2690 lm	89 lm/W	.	.	.	4222-A-3-388-XX	
		4000 K	2870 lm	95 lm/W	.	.	.	4222-A-3-389-XX	
		2700 K	2690 lm	89 lm/W	.	.	.	4222-A-5-387-XX	
		3000 K	2690 lm	89 lm/W	.	.	.	4222-A-5-388-XX	
30 W	16°/44°	4000 K	2870 lm	95 lm/W	.	.	.	4222-A-5-389-XX	
		2700 K	2260 lm	75 lm/W	.	.	.	4222-N-3-387-XX	
		3000 K	2260 lm	75 lm/W	.	.	.	4222-N-3-388-XX	
		4000 K	2410 lm	80 lm/W	.	.	.	4222-N-3-389-XX	
		2700 K	2260 lm	75 lm/W	.	.	.	4222-N-5-387-XX	
30 W	27°	3000 K	2260 lm	75 lm/W	.	.	.	4222-N-5-388-XX	
		4000 K	2410 lm	80 lm/W	.	.	.	4222-N-5-389-XX	
		2700 K	2390 lm	79 lm/W	.	.	.	4222-B-3-387-XX	
		3000 K	2390 lm	79 lm/W	.	.	.	4222-B-3-388-XX	
		4000 K	2550 lm	85 lm/W	.	.	.	4222-B-3-389-XX	
30 W	40°	2700 K	2390 lm	79 lm/W	.	.	.	4222-B-5-387-XX	
		3000 K	2390 lm	79 lm/W	.	.	.	4222-B-5-388-XX	
		4000 K	2550 lm	85 lm/W	.	.	.	4222-B-5-389-XX	
		2700 K	2390 lm	79 lm/W	.	.	.	4222-C-3-387-XX	
		3000 K	2390 lm	79 lm/W	.	.	.	4222-C-3-388-XX	
30 W	44°/16°	4000 K	2550 lm	85 lm/W	.	.	.	4222-C-3-389-XX	
		2700 K	2390 lm	79 lm/W	.	.	.	4222-C-5-387-XX	
		3000 K	2390 lm	79 lm/W	.	.	.	4222-C-5-388-XX	
		4000 K	2550 lm	85 lm/W	.	.	.	4222-C-5-389-XX	
		2700 K	2260 lm	75 lm/W	.	.	.	4222-H-3-387-XX	
30 W	Asymmetric	3000 K	2260 lm	75 lm/W	.	.	.	4222-H-3-388-XX	
		4000 K	2410 lm	80 lm/W	.	.	.	4222-H-3-389-XX	
		2700 K	2260 lm	75 lm/W	.	.	.	4222-H-5-387-XX	
		3000 K	2260 lm	75 lm/W	.	.	.	4222-H-5-388-XX	
		4000 K	2410 lm	80 lm/W	.	.	.	4222-H-5-389-XX	
30 W	Asymmetric	2700 K	1600 lm	53 lm/W	.	.	.	4222-U-3-387-XX	
		3000 K	1600 lm	53 lm/W	.	.	.	4222-U-3-388-XX	
		4000 K	1710 lm	57 lm/W	.	.	.	4222-U-3-389-XX	
		2700 K	1600 lm	53 lm/W	.	.	.	4222-U-5-387-XX	
		3000 K	1600 lm	53 lm/W	.	.	.	4222-U-5-388-XX	
4000 K	1710 lm	57 lm/W	.	.	.	4222-U-5-389-XX			

HALMSTAD CENTRAL RAILWAY STATION – SWEDEN



PRIVATE RESIDENCE – SWEDEN

