

NEW FAMILY!

CASA

 **Unilamp**

- *Ultra-compact size*
- *High efficiency energy consumption*
- *Sharp light casted on the wall with low glare*
- *Bollard pre-wired with outdoor cable for quick installation*
- *Excellent corrosion resistance*




CASA

NEW
Release



www.unilamp.co.th/en/p/casa

- WALL UP-DOWNLIGHT
- SURFACE DOWNLIGHT
- BOLLARDS

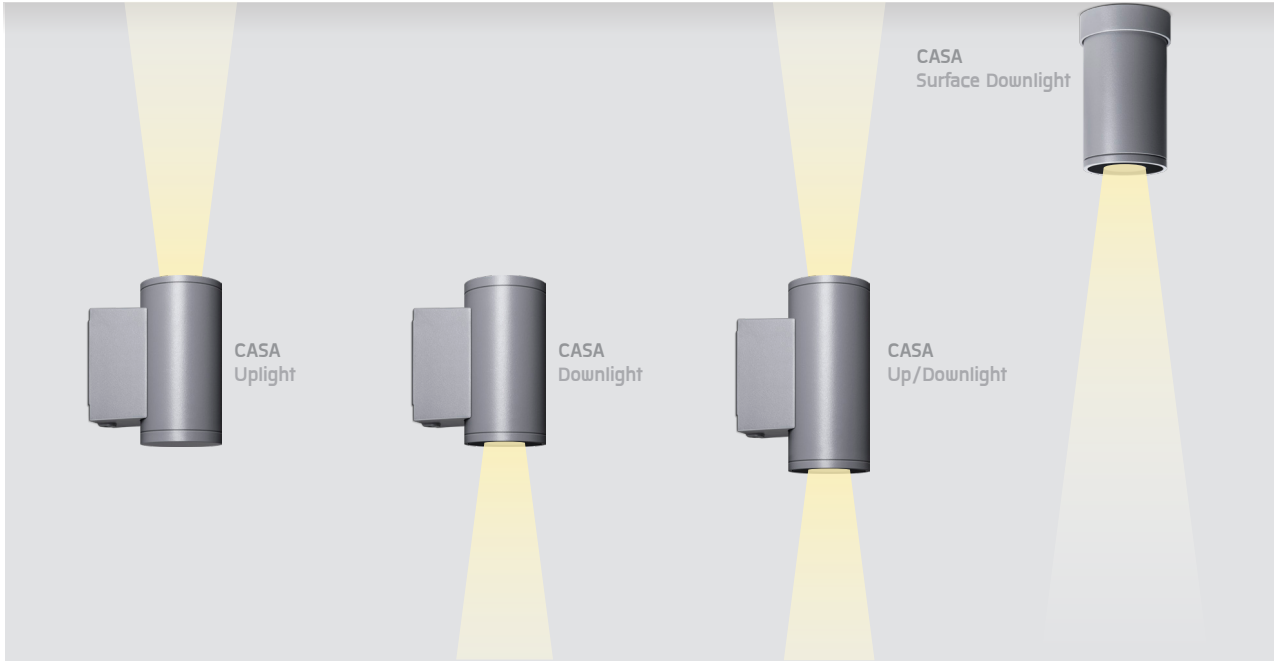

CASA Bollard
• Root Mount
• Flange Base



CASA Short Bollard
• Root Mount
• Flange Base





The **CASA** luminaire range is the perfect lighting tool for residential lighting tasks. Although small in size the lighting performance satisfies professional standards. **CASA** is available as single or double directional wall light, surface mounted downlight and bollard. Computer optimized reflectors and diffuser generate light with remarkable brilliance and color consistency. Excellent corrosion resistance is archived through the use of high quality extruded aluminum and enhanced LM6 die cast alloy. **CASA** is suitable for environments up to 50°C.



Specification


- Designed, Manufactured and Tested according to IEC 60598.
- LM6 Die Cast Aluminium / Extruded Aluminium Housing.
- Stainless steel screws.
- Nano Ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Polycarbonate diffuser.
- Post-cured silicone gasket.
- High quality LED module and driver.
- GFR PA6.6 terminal block.
- Weather proof TPE grommet.
- Installation must be carried out according to the enclosed product manual.

Available Color


- | | |
|------------------|--|
| Black | [replace the last 2 digits of ordering code with O1] |
| Graphite | [replace the last 2 digits of ordering code with O2] |
| Dark Grey | [replace the last 2 digits of ordering code with O3] |
| Aluminium Silver | [replace the last 2 digits of ordering code with O4] |
| White | [replace the last 2 digits of ordering code with O6] |
| Wooden Brown | [replace the last 2 digits of ordering code with O7] |




CASA
Up/Downlight

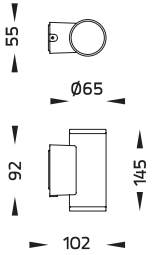


CASA
Downlight



CASA
Uplight



CASA
Surface Downlight



CASA

NEW!

- WALL UP-DOWNLIGHT
- SURFACE DOWNLIGHT

CASA - Up/downlight / 5054

CASA - Downlight / 5052

CASA - Uplight / 5053

CASA - Surface Downlight / 4052

Luminaire Performance

150 - 300 lm

3 - 5 W

50 - 60 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller





On-Off

CASA
Bollard Root Mount /
Bollard Root Mount CVDA

CASA
Short Bollard Root Mount /
Short Bollard Root Mount CVDA

CASA
Bollard Flange Base /
Bollard Flange Base CVDA

CASA
Short Bollard Flange Base /
Short Bollard Flange Base CVDA

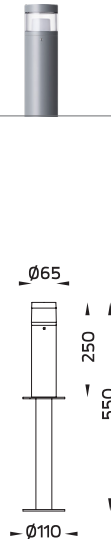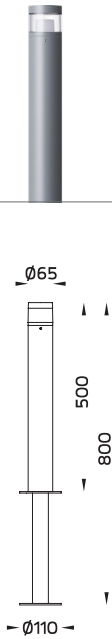

CASA

NEW!

BOLLARDS

- CASA – Bollard Root Mount / 7186
- CASA – Bollard Root Mount CVDA / 7186
- CASA – Short Bollard Root Mount / 7187
- CASA – Short Bollard Root Mount CVDA / 7187

Luminaire Performance

90 – 120 lm
3 W
30 – 40 lm/W

Beam Options



Color Temperature

2700K / 3000K / 4000K

Controller

On-Off
Remote driver On-Off / DALI

Accessories



CASA

NEW!


BOLLARDS

- CASA – Bollard Flange Base / 7188
- CASA – Bollard Flange Base CVDA / 7188
- CASA – Short Bollard Flange Base / 7189
- CASA – Short Bollard Flange Base CVDA / 7189

Luminaire Performance

90 – 120 lm
3 W
30 – 40 lm/W

Beam Options



Color Temperature

2700K / 3000K / 4000K

Controller

On-Off
Remote driver On-Off / DALI

Accessories



∴ Ideal Application



Unilamp Co., Ltd.

461 Ramintra Road, Kannayao, Bangkok 10230 Thailand

Tel : +66[0]2 943 2420-1, +66[0]2 946 4170-1

Fax : +66[0]2 943 2419

unilamp@unilamp.co.th | online@unilamp.co.th



www.unilamp.co.th