



LED LUMINAIRES

2025/2026





• LED LUMINAIRES 2025/2026 •

CONTENT [BY APPLICATION TYPE]

■ ACCENT LIGHT



244
VELA **NEW!**

■ BOLLARD



166
SKUNA



184
TUBE



202
CORE



248
AGAR




252
CASA **NEW!**




258
CAP



268
CYCLOPS



274
FUJI



278
MACRON




280
CHARISMA



288
TOWER



292
SE7EN



294
ZOID




346
PILLAR



352
BICEPS

■ CATENARY



184
TUBE **NEW!**



346
PILLAR **NEW!**

■ CEILING MOUNT



170
BRONCO



184
TUBE




202
CORE



252
CASA **NEW!**


■ CEILING RECESSED



130
ATOM




184
TUBE




202
CORE


■ INGROUND




130
ATOM



136
VOLGA




144
POLKA



386
ZET



392
ARC



396
QUARK



400
AYERS



410
GRAVITON

■ LIGHT COLUMN



334
STICK **NEW!**



346
PILLAR




352
BICEPS

■ LINEAR LIGHT




412
SIRIUS



424
LuxBeat **NEW!**

■ ON-GROUND




298
BUZZ







406
SHOOTER



■ POLE MOUNTED

					
102 ATHLON	302 EQUINOX	310 KORNER NEW!	320 HELIOS	322 MARANELLO	324 BLAZE
					
328 NeoOPLACE	334 STICK NEW!	340 PRIMUS NEW!	356 NEOS	368 SIROCCO	374 KRONOS
					
382 ANDROMEDA					

■ PROJECTOR

					
28 TELESCOPE	34 SPOTT	38 ALPHA	70 SONIC	82 KUBIK	92 CETUS NEW!
					
102 ATHLON	108 CANNON	114 SPACE NEW!	356 NEOS	368 SIROCCO	374 KRONOS

■ UNDERWATER

				
130 ATOM	136 VOLGA	144 POLKA	148 ACQUA	152 VAREE

■ WALL RECESSED



218
DOT



212
I-BRICK



228
ZOUC




224
PLUTO

■ WALL SURFACE MOUNT




158
ARGOS



162
DADOS



166
SKUNA



170
BRONCO




180
MIRA



184
TUBE



202
CORE



228
ZOUC



234
RETINA




238
DRIFT



242
DARIUS



248
AGAR



252
CASA NEW!



346
PILLAR



368
SIROCCO



374
KRONOS

CONTENT [BY PRODUCT FAMILY]

■ 028 TELESCOPE

Modular Solutions




■ 034 SPOTT

Modular Solutions



■ 038 ALPHA

Modular Solutions



■ 070 SONIC

Modular Solutions



■ 082 KUBIK

Modular Solutions



■ 092 CETUS

NEW!

Modular Solutions



■ 102 ATHLON

Modular Solutions



■ 108 CANNON

Modular Solutions




■ 114 SPACE

NEW!


Modular Solutions




■ 130 ATOM



■ 136 VOLGA



■ 144 POLKA



■ 148 ACQUA



■ 152 VAREE



■ 158 ARGOS



■ 162 DADOS



■ 166 SKUNA



■ 170 BRONCO



■ 180 MIRA



■ 184 TUBE




■ 202 CORE



■ 212 I-BRICK



■ 218 DOT



■ 224 PLUTO



■ 228 ZOUK



■ 234 RETINA



■ 238 DRIFT



■ 242 DARIUS



■ 244 VELA

NEW!



■ 248 AGAR



■ 252 CASA

NEW!



■ 258 CAP


Modular Solutions



■ 268 CYCLOPS



■ 274 FUJI



■ 278
MACRON



■ 280
CHARISMA



■ 288
TOWER



■ 292
SE7EN



■ 294
ZOID



■ 298
BUZZ



■ 302
EQUINOX



Modular Solutions

■ 310
KORNER

NEW!



Modular Solutions

■ 320
HELIOS



Modular Solutions

■ 322
MARANELLO



Modular Solutions

■ 324
BLAZE



■ 328
NeoPLACE



Modular Solutions

■ 334
STICK

NEW!



Modular Solutions


■ 340
PRIMUS

NEW!



Modular Solutions

■ 346
PILLAR



■ 352
BICEPS



■ 356
NEOS



Modular Solutions

■ 368
SIROCCO

Modular Solutions



■ 374
KRONOS

Modular Solutions




■ 382
ANDROMEDA

Modular Solutions



■ 386
ZET



■ 392
ARC



■ 396
QUARK



■ 400
AYERS




■ 406
SHOOTER



■ 410
GRAVITON



■ 412
SIRIUS



■ 424
LUXBEAT

Modular Solutions



■ 432
MODULAR
SOLUTIONS



■ 464
DMX
CONTROL
OPTION



■ 470
POLE &
ANCHOR BOLT
KIT



■ 494
ACCESSORIES



Unilamp... Lighting the World Since 1993

Celebrating our 30th anniversary milestone with pride!
Unilamp is dedicated to designer satisfaction through

- Premium Quality Luminaires
- Service Excellence
- Cost-Effective Solutions
- Global Partnerships

Unilamp



Unilamp

Unilamp

a Thailand-based company specializing in manufacturing
Outdoor Lighting Solutions.



A GLOBAL LEADER FROM THAILAND

UNILAMP TRUSTED IN
90+
COUNTRIES WORLDWIDE



In celebration of our 30th anniversary, Unilamp is proud to present
its Outdoor Lighting Solutions to the World with its "Ultimate Solutions"

Unilamp provides “**Ultimate Solutions**”
with a focus on Premium Quality and Service Excellence.



Premium Quality

- Product performance
- High-Quality materials
- International Standards and Certifications
- UniShield16
- UniBlock
- UniLock



Service Excellence

- Unilamp Lighting Design Center
 - Project planning: DIALux design support
 - Training support: Unilamp Lighting Design Training Center
- UniTools
 - DIALux Plugin
 - LuxBeat Calculator
- UniLab
- UniModification
 - Modification Solutions
- 5 Years Warranty
- On-site mockup
- Troubleshooting



Cost Effective

- Selective Materials
- Installation
- Maintenance and Repair
- Disposal and Recycling
- Modular Solutions



Partnership Worldwide

- Unilamp Regional offices
 - Asia
 - Thailand (HQ)
 - India (Regional)
 - Philippines (Regional)
 - Indonesia (Regional)
 - Middle East
 - UAE (Regional)
- Associate company Unilamp Norden
- Partnership worldwide
 - Asia
 - Oceania
 - Europe
 - North America
 - South America
 - Africa
 - Middle East



PRODUCT OF THAILAND

Unilamp offers a complete range of luminaires for all Outdoor Lighting Applications.

- ACCENT LIGHT
- BOLLARD
- CATENARY
- CEILING MOUNT
- CEILING RECESSED
- INGROUND
- LIGHT COLUMN
- LINEAR LIGHT
- ON-GROUND
- POLE MOUNTED
- PROJECTOR
- UNDERWATER
- URBAN ACCENT
- WALL RECESSED
- WALL SURFACE MOUNT
- POLE



PRODUCT PERFORMANCE

**“Unilamp, focuses on
Performance-based Products with Timeless design.”**

Respected worldwide for its focus on quality and design, Unilamp luminaires are known for their excellent engineering and manufacturing quality.

With a never-ending desire to improve, Unilamp's product development is constantly evolving with new designs, finishes, and technology.

Product performance relies on robust engineering principles, consistent manufacturing processes, in-house design and engineering capabilities. Unilamp utilizes industry leading software to support engineering, design and manufacturing processes.

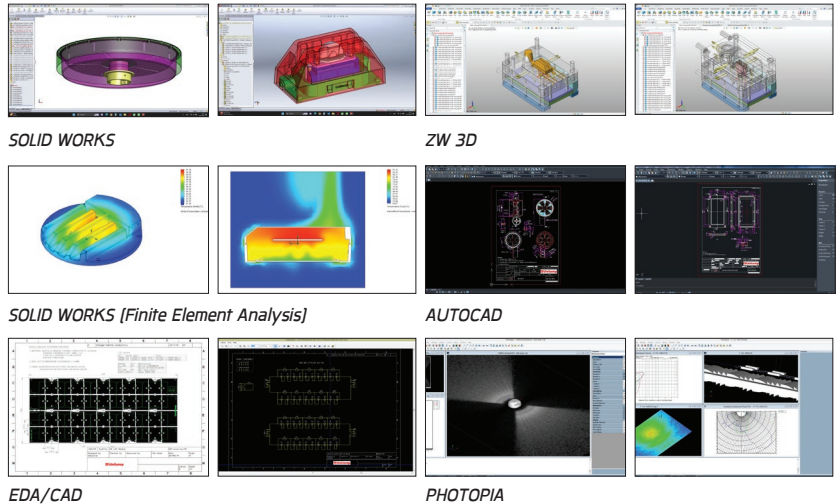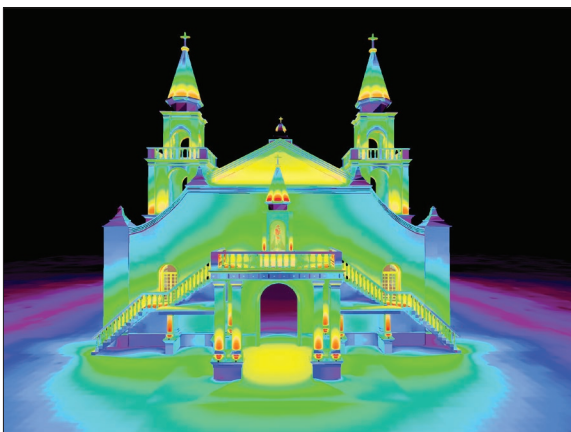

Unilamp is DIALux's partner since 2010

The Unilamp R&D and manufacturing team is supported in their work by:

- AutoCad : for drawings and drafting
- Solid Works : for 3D fixtures design and FEA analysis
- ZW 3D : for detail working drawing
- Photopia : for design of lighting optics
- DIALux : to provide high quality lighting calculations and solutions for our clients via web based intergration. Unilamp is Dialux partner since 2010.
- EDA/CAD : PCB design

HIGH-QUALITY MATERIALS



SPACE Projector



Housing:

The robustness and longevity of our luminaires is made possible using two key technologies: special formulated LM6 aluminum alloy (LM6+), and the use of the UniShield16 coating process.

The LM6+ aluminum alloy, is virtually copper free and known as the best lightweight material for demanding architectural and marine applications.

UniShield16 is a Unique Coating process exclusively offered by Unilamp that ensures a long lifespan and beautiful product appearance.


LED:

Light source technology matching the illumination task from miniature sized high power LED to chip on board, made by trusted manufacturers. The use of quick connectors and thermal pads allow hassle free upgrade and repair of the light source. 3000K color temperature with CRI exceeding 80 and 3-step MacAdam Ellipse are our standard. Variations are available upon request.



Optical Cover:

Ultra-tough silica-boron trioxide glass is used for superior chemical resistance, high impact rating and minimal photometric losses. Naturally glass is resistant to high temperatures, ultra violet light and entirely recyclable.

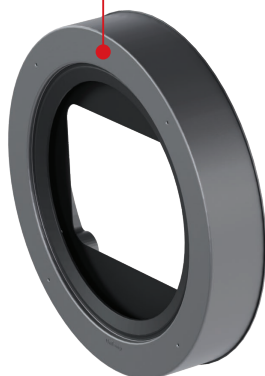

Optical system:


Unilamp utilizes different technologies to shape light. From aluminum reflectors, freeform optics to polymers with Nano or microstructure, the best technology is selected based on the light application. Glare controlling accessory is available for a wide range of products either installed during production or at site.

LED Drivers:

LED drivers are selected to match the power requirements of the luminaire, the required control system and compliance to national and international standards. Additional resilience features such as surge protection devices are available for most Unilamp luminaires. Out of principle Unilamp utilizes readily available LED drivers from well-known manufacturers.

Heatsink:

Perfection as a result of engineering: multi-level factorial optimized heatsink with the perfect balance of weight, raw material use and efficiency, keeps the light source and control gear at low operation temperature even at ambient temperatures of 50°C.

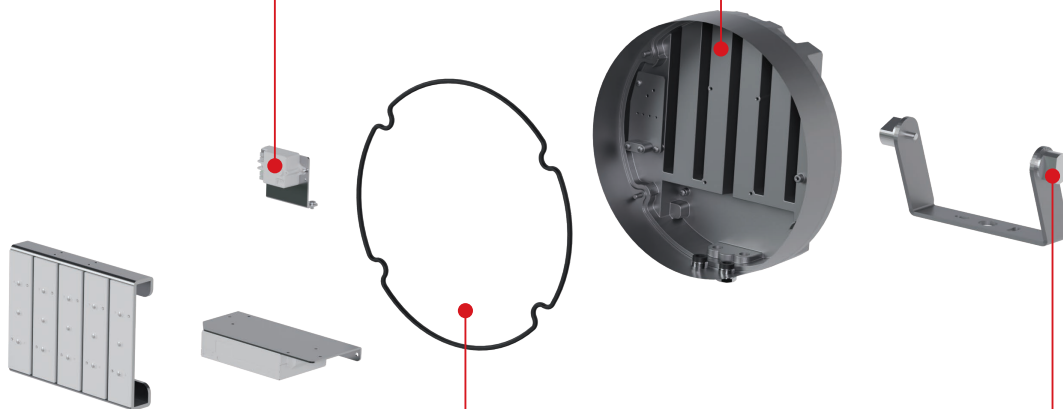

External Screws:



Quality down to the smallest detail: external screws are made from stainless steel and are coated with specialty formulated galvanic corrosion inhibitor.

Gasket:

Our gaskets are made from long lasting vulcanized silicone elastomer. Silicone elastomers are suitable for a wide temperature range from -40°C to +200°C. By design the gaskets are replaceable and easily removable from other housing components.



INTERNATIONAL STANDARDS AND CERTIFICATIONS

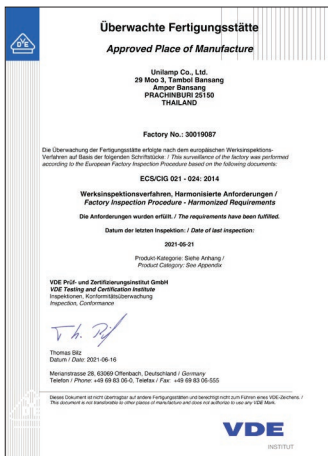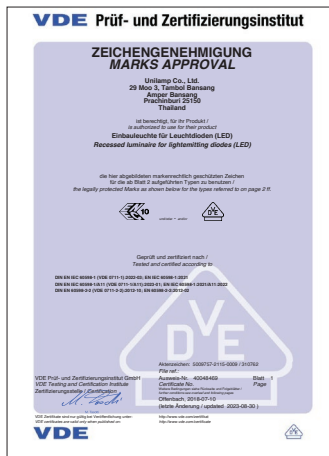

■ QUALITY & PERFORMANCE & SAFETY

- Global:**
 - IEC STANDARD
 - ISO 17025 [UniLab]
- Global selective products:**
 - VDE CERTIFIED
 - CB CERTIFIED
 - ENEC CERTIFIED
- Europe:**
 - CE compliant
- India:**
 - BIS CERTIFIED
- Indonesia:**
 - SNI CERTIFIED
- Thailand:**
 - TIS CERTIFIED

■ FACTORY

- Global:**
 - Approved Place of Manufacture
 - Certified by VDE

■ ENVIRONMENT


- Global:**
 - DarkSky Certified
 - ISO 14001:2015
- Thailand:**
 - Green Industry

■ MANAGEMENT SYSTEM


- Global:**
 - ISO 9001:2015

■ OCCUPATIONAL HEALTH & SAFETY

- Global:**
 - ISO 45001:2018

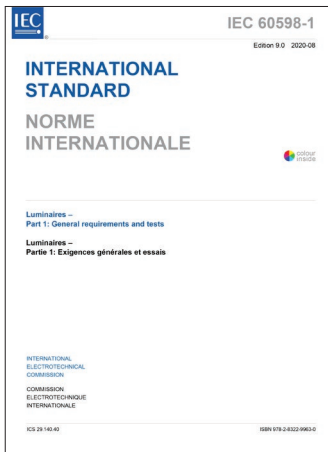

UniShield16 is a superior coating process invented by Unilamp to guarantee "Premium Quality and Long Lifespan"

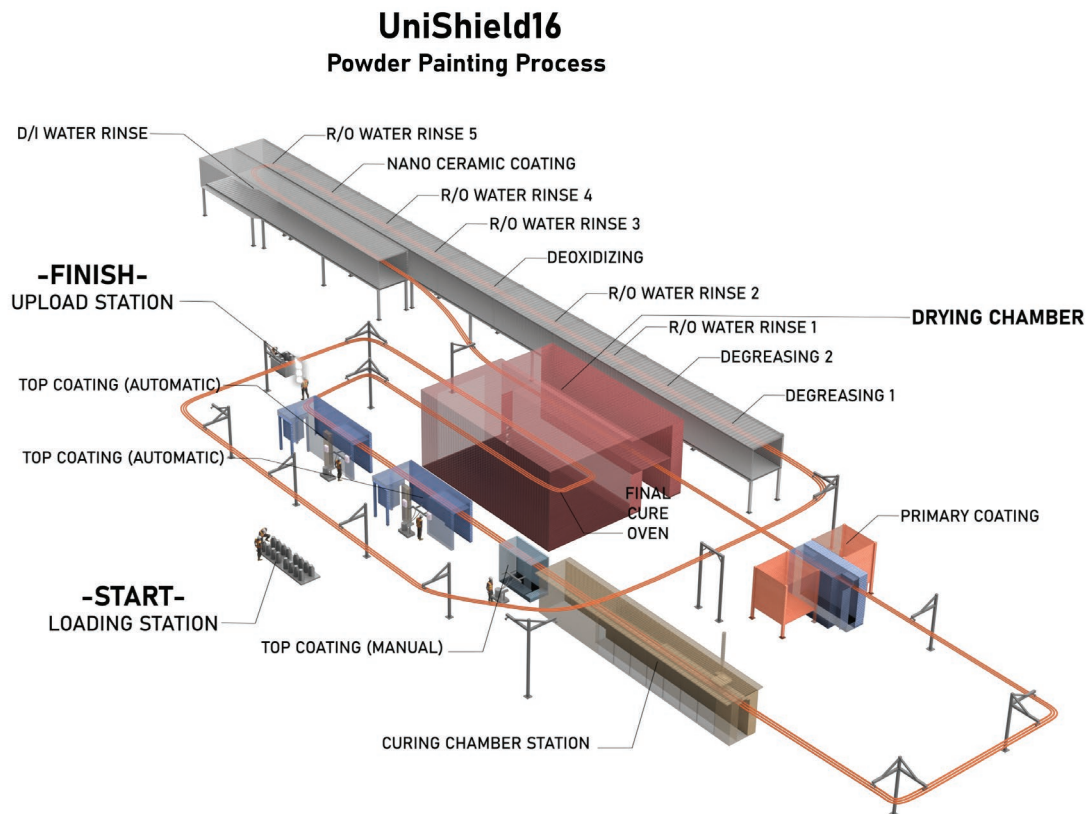

■ The UniShield16 process

1. Nano Ceramic Coating


The UniShield16 process employs nano ceramic surface conversion to optimize corrosion resistance and enhance powder coat adhesion. Daily monitoring of chemical concentration ensures adherence to stringent quality standards at every step.

2. Primer Coating


The primer is meticulously formulated for use on casting metal substrates, particularly aluminum alloys. Our UV-stabilized Polyester powder coat ensures durable color rendering while offering superior protection and weather resistance. We employ high-purity De-Ionized water throughout the process to maintain the highest quality standards.

3. Polyester Topcoat

The primary epoxy-resin-based coating enhances corrosion resistance, especially when subjected to severe climatic conditions.

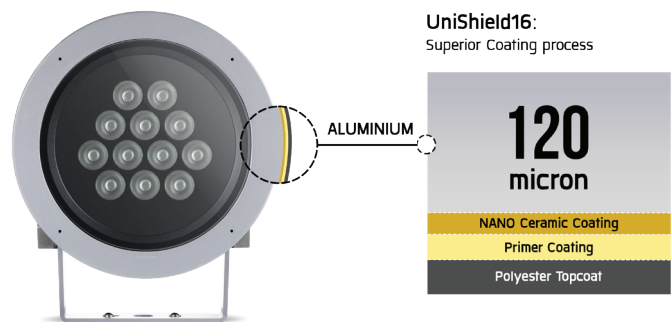

UniBlock

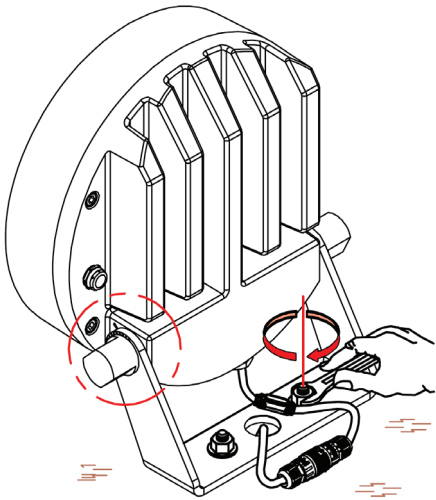

“Premium Quality with UniBlock”



Enhanced quality feature:


1. Anti-humidity kit:

This enhanced protection feature blocks transversal water ingress through the main wiring of the luminaire. This type of protection further increases the capability of our product to operate in challenging installation conditions.

2 Vent:

The Delta-P-Guard equalizes the pressure and moisture between the ambient and the internal pressure of the luminaire. Rapid changing environmental conditions such as rain can cause high-pressure differentials between the inside of the luminaire body and the environment. This causes stress on seals and can lead to moisture buildup inside the luminaire ultimately leading to condensation and premature failed luminaires.

UniLock

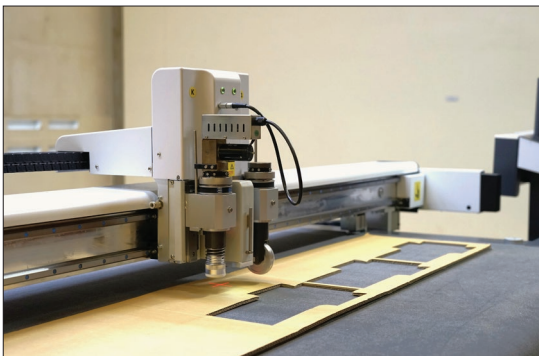

Unilamp

has a Remarkable In-House Packaging Locking System, that we customize to specific product dimensions.

The Essence of UniLock Protecting Excellence from Within

At Unilamp, we recognize that each luminaire we create is a masterpiece, a fusion of art and technology that deserves the utmost protection.

■ Transit products protection control

- Impact resistant
- Scratch resistant

■ Environmentally Friendly

- Recycled material
- Reduced carbon footprint

■ In-house customization

- Specific to each application

Unilamp Lighting Design Center

Lighting design starts with reliable, precise and true photometric data. Provided by our own ISO 17025 and ILAC approved laboratory.

We offer precise data, information, and specifications for various design applications, including landscape lighting, underwater lighting, facade lighting, area lighting, and streetlighting analysis.

Our expert lighting design team is able to fulfill all your lighting design analysis needs. With extensive knowledge in landscape, underwater, facade, area, and street lighting.


As part of this initiative, we provide comprehensive training sessions conducted by our certified trainers, ensuring the highest level of instruction and expertise.





3D False Color Analysis



IsoLuxline



Lighting evaluation through
3D Rendering



Tools available at Unilamp website

1. DIALux Plugin
2. LuxBeat Calculator
3. LuxBeat XL Calculator



Our in-house laboratory is accredited to ISO 17025 by internationally recognized ilac-MRA and NAC.



Our product testing is second to none and our clients can be assured that at Unilamp a thorough process of product testing is adhered to, both at our factory and at any of our partners premises. All luminaires that carry the Unilamp trademark fall under our guidelines for manufacture.


• Light Measurement

All Unilamp products are measured using our Goniophotometer, providing our clients with accurate photometric data. Photometric files are available on our website.



• Thermal endurance test

Test under conditions representing cyclic heating and cooling in service for 168 hours, the fixture shall not become unsafe or fail prematurely.

Thermal endurance testing is a method that allows us to study the luminaire performance over time in a repeatable way. It allows us to identify possible weak points and rectify them.



Ta40°C
AND
Ta50°C



• IP Test

IP testing assesses the luminaires ability to withstand ingress of water and dust.

• IK Test

Test for the degree of protection of the lighting fixture against harmful external mechanical impacts.

• EMC Test

To ensure that Unilamp products do not generate excessive electromagnetic interference or are not susceptible to interference from other devices.


• Humidity Test

Test the luminaires under the high humidity environment for particular markets.

• Salt Spray Test

Assessment for how long a luminaire housing can withstand environments with severe corrosive conditions, for example high saline environments.

Additional test can be performed depending on the type of luminaire, national requirements, or customer specific requirements. Such as wind load, 3-axis vibration testing and Photobiological safety assessment.



As a leading manufacturer of lighting solutions for residential and commercial settings, UNILAMP now offers an ecological lighting solution to suit most lighting requirements.

From the past to present, our company continues to strive for excellence by continuously developing the Unilamp brand and product quality. To this end we have been rewarded with the Industrial Quality Standard.



Our belief in what we do has seen us contribute in most major international lighting exhibitions as listed.

International Fairs;

- Light & Building – Frankfurt , Germany
- Interlight Moscow – Russia
- LuxLive – London, UK
- Light Middle East – Dubai , UAE
- Hong Kong Lighting Fair
- Lumivill – Lyon, France
- Intel Show – Milan, Italy

Domestic Fairs;

- BOI Fair
- Architect Fair
- Baan Lae Suan Fair
- LED Expo



We have always believed in ourselves and it is our initiative and desire to be the best that has seen us rise from our beginnings of 1993 to satisfy a worldwide market in the future.

We are proud of our heritage but fully understand that we must continue to provide you, our client, with the highest possible customer service balanced with a long lasting product. Our Showroom in Ramintra Rd Bangkok is open to all of our clients to assist in satisfying and developing a professional experience and atmosphere.




WHAT'S NEW

NEW Release

- Family
- Application

CASA PAGE 252

- CEILING MOUNT
- WALL SURFACE MOUNT
- BOLLARD



CETUS PAGE 092

- PROJECTOR





KORNER PAGE 310

- POLE MOUNTED



STICK PAGE 334

- LIGHT COLUMN
- POLE MOUNTED



VELA PAGE 244

- ACCENT LIGHT



PRIMUS PAGE 340

- POLE MOUNTED



SPACE PAGE 114

- PROJECTOR



NEW Controller

RGBW
Lighting Control
with DMX


ALPHA PAGE 038

- PROJECTOR



BRONCO PAGE 170

- WALL SURFACE MOUNT
- CEILING MOUNT



TUBE PAGE 184

- WALL SURFACE MOUNT




NEW Added


New Models

ALPHA PAGE 038


- PROJECTOR




Mini ALPHA Round - ID




Mini ALPHA Round Snoot - CC




Mini ALPHA Round - ID



Mini ALPHA Round Arm



Medium ALPHA Round - ID



Medium ALPHA Round

**NEW
Added**

*New
Models*


ARC PAGE 392

- INGROUND



BRONCO PAGE 170

- WALL SURFACE MOUNT
- CEILING MOUNT



CAP PAGE 258

- BOLLARD



Medium CAP

GRAVITON PAGE 410

- INGROUND



KRONOS PAGE 374

- WALL SURFACE MOUNT
- PROJECTOR
- POLE MOUNTED




SIRIUS PAGE 412

- WALL SURFACE MOUNT
- INGROUND



KUBIK PAGE 082


- PROJECTOR



KUBIK - CC [DMX]

LUXBEAT PAGE 424

- LINEAR LIGHT
- INGROUND



LuxBeat XL




PILLAR PAGE 346

- CATENARY



QUARK PAGE 396

- INGROUND



SHOOTER PAGE 406

- ON-GROUND



SKUNA PAGE 166

- WALL SURFACE MOUNT




Mini SKUNA

TUBE PAGE 184

- WALL SURFACE MOUNT
- CATENARY



Maxi TUBE



Mini TUBE

TELESCOPE

■ PROJECTOR



TELESCOPE is a low glare long snoot ground mount or wall mount spotlight with strong base for permanent installation and with earth spike for temporary use. Its distinctive lamp compartment with trunk limits the undesired light spill.

TELESCOPE is fitted with COB LED with high CRI in 2700K, 3000K or 4000K color temperature with good color consistency and available with a choice of six body colors. The choices of beam angles are narrow, medium and wide. It is suitable to light up small plants and woody bushes from a low mounting height as well as all other outdoor spotlighting application. Additional accessories such as tree strap is also available.




www.unilamp.co.th/en/p/telescope

TELESCOPE + Accessory kit
for Ground Mount Solutions



TELESCOPE + Accessory kit
for Pole Mount Solutions

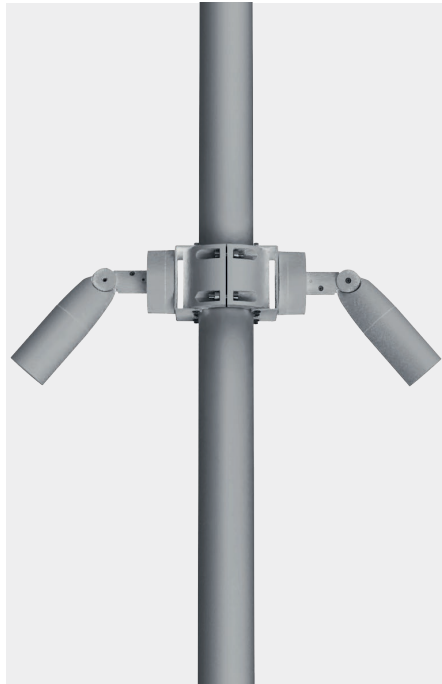

TELESCOPE + Accessory kit
for Pole Mount Solutions



Specification


- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum, extruded aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module.
- On-Off / 1-10V / DALI control gear.
- Installation must be carried out according to the enclosed product manual.

Available Color



****Custom colors are available on request.**

TELESCOPE

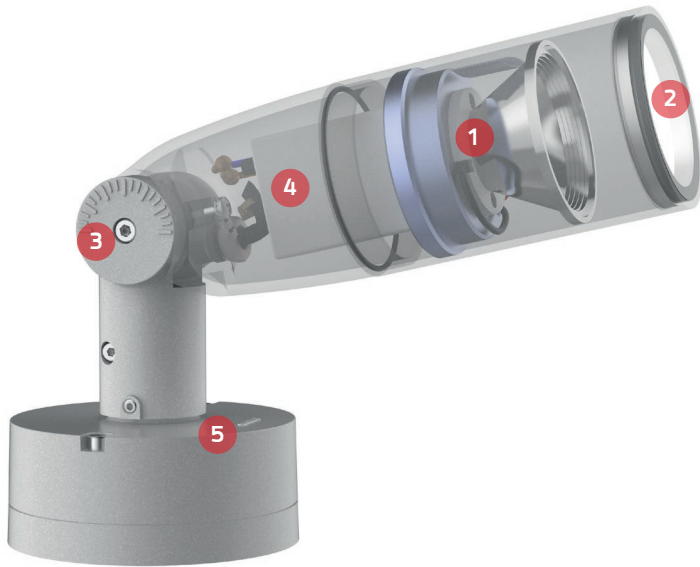

1. LED Module

High Power LED in COB technology.
2700K, 3000K and 4000K.
CRI >80 / 3-Step MacAdam Ellipse.

2. Trunk

Corrosion proof extruded aluminum.
Safety tempered glass.

3. Aiming


Adjustable with hexagon tool.
Presented with scale.

4. Control Gear

Integrated control gear.
High quality constant current driver.
Conforms to safety and EMC regulation.

5. Body Housing

Enhanced LM6 die-cast aluminum body.
Low copper content (<0.1%)
Utilize 16 stages pre-treatment and coating process.

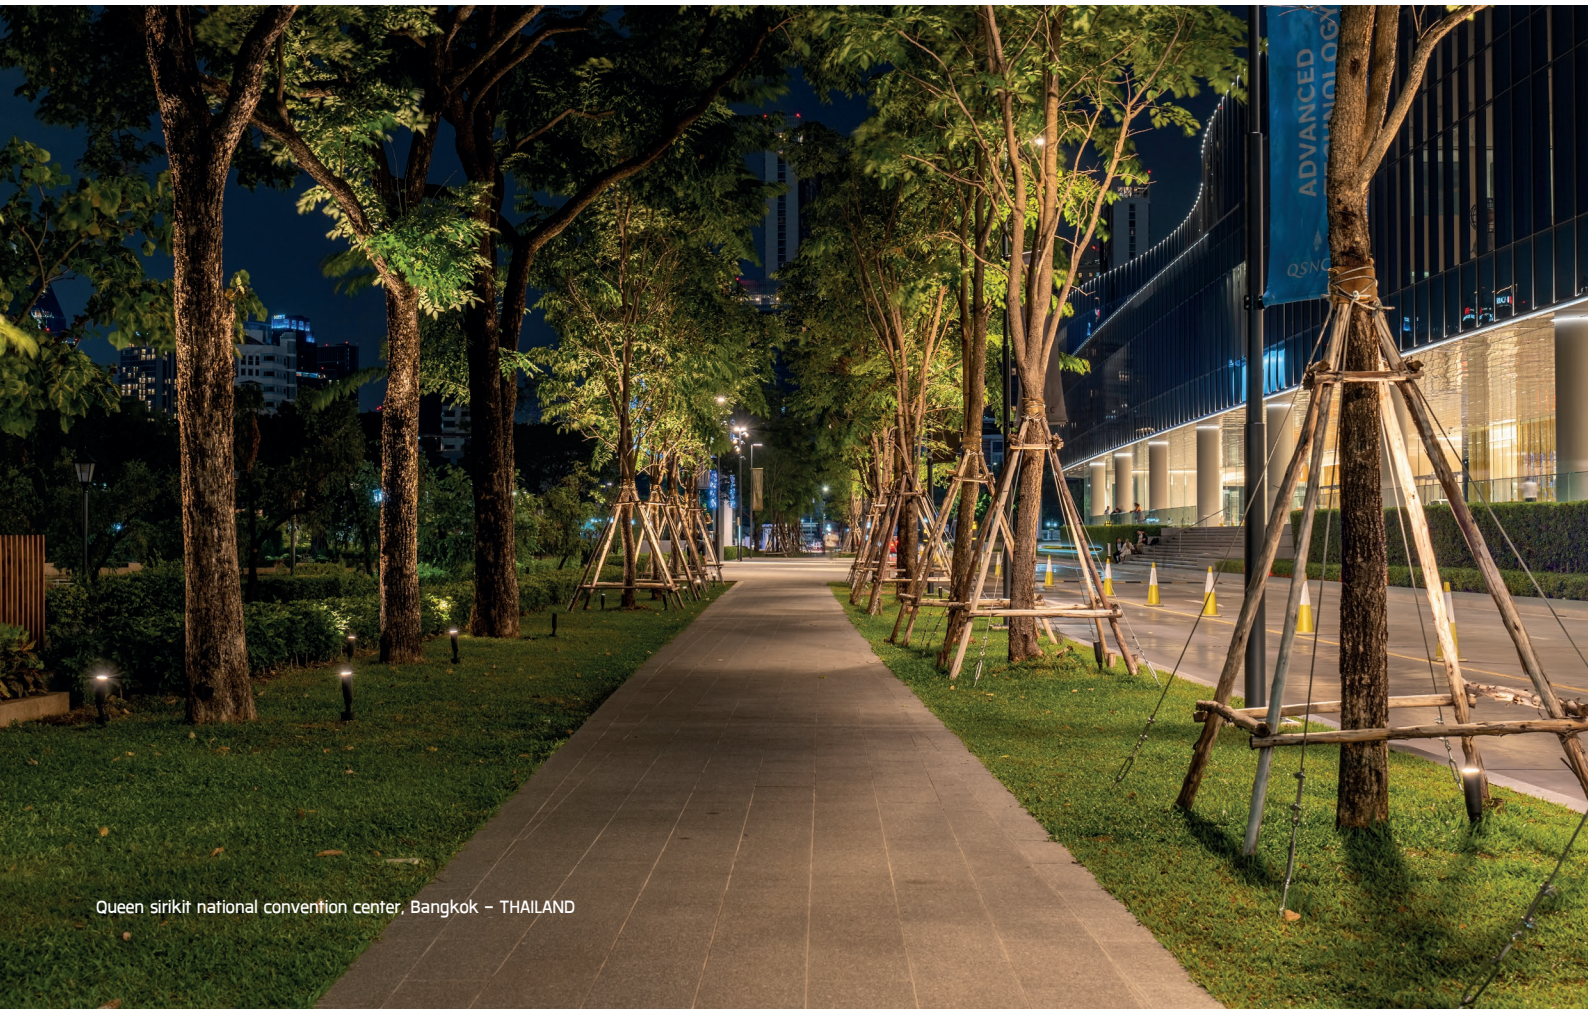

• MODULAR SOLUTIONS



*pre-assembled from factory

TELESCOPE + Accessory kit for Ground Mount Solutions



5912
TELESCOPE
Spike - ID

+



AUN-ESP-0012-XX
Spike on the side
L=900

TELESCOPE + Accessory kit for Pole Mount Solutions



5911
TELESCOPE

OR



5913
TELESCOPE - ID

+



Aluminum Pole /
Steel Pole

+



AUN-CLP-0004-XX
Pole Clamp
Ø102-105mm.
AUN-CLP-0006-XX
Pole Clamp
Ø60-76mm.

+




AUN-ACB-0005-00
Anchor bolt kit,
aluminum pole

OR



AUN-ACB-0008-00
Anchor bolt kit,
pole Ø102mm and
151x102mm,
galvanized steel pole

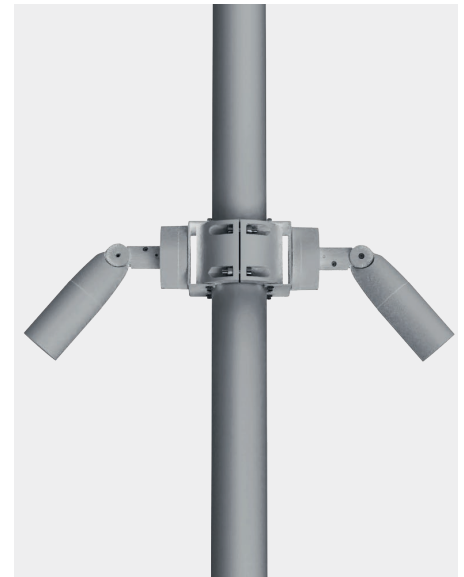

TELESCOPE + Accessory kit for Pole Mount Solutions



5911
TELESCOPE

OR




5913
TELESCOPE - ID

+



Aluminum Pole /
Steel Pole

+



AUN-CLP-0004-XX
Pole Clamp
Ø102-105mm.
AUN-CLP-0006-XX
Pole Clamp
Ø60-76mm.

+



AUN-MOT-0013-XX
Mounting arm

+



AUN-ACB-0005-00
Anchor bolt kit,
aluminum pole

OR



AUN-ACB-0008-00
Anchor bolt kit,
pole Ø102mm and
151x102mm,
galvanized steel pole

*Pole mounting arm for 1-3 projector is available for installation on 1 or 2 sides
*Please see Poles & Anchor bolt section for pole mounting options

TELESCOPE



TELESCOPE




TELESCOPE




TELESCOPE Spike – ID





TELESCOPE – ID



OD-5911
On-Off / 1-10V



OD-5911
DALI



TELESCOPE

Application Type : Projector
Subgroup : Circular

TELESCOPE / 5911

TELESCOPE Spike – ID / 5912

TELESCOPE – ID / 5913

Luminaire Performance

330 – 1180 lm

7 – 14 W

47 – 84 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K


Controller

On-Off/ 1-10V/ DALI

Input Options

220-240Vac 50/60Hz

Accessories

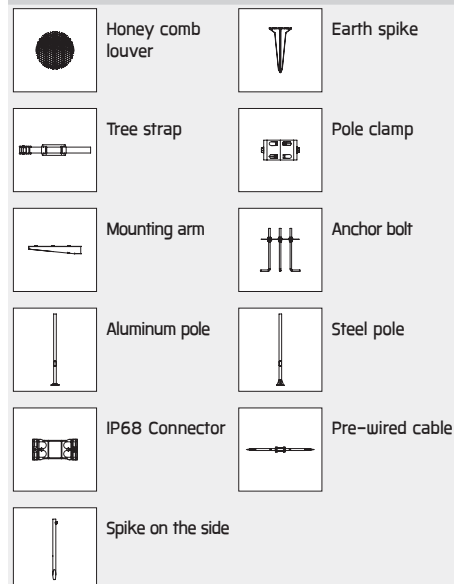

*Please see Poles & Anchor bolt section for pole mounting options

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller			Ordering Code
									
OD-5911  On-Off/ 1-10V  DALI	14 W	9°	2700 K	1070 lm	76 lm/W	•			5911-5-3-901-XX
			3000 K	1130 lm	80 lm/W	•			5911-5-3-904-XX
			4000 K	1180 lm	84 lm/W	•			5911-5-3-503-XX
			2700 K	1070 lm	76 lm/W			•	5911-5-5-503-XX
	14 W	18°	2700 K	1070 lm	76 lm/W	•			5911-A-3-503-XX
			3000 K	1130 lm	80 lm/W	•			5911-A-3-901-XX
			4000 K	1180 lm	84 lm/W	•			5911-A-3-904-XX
			3000 K	850 lm	60 lm/W	•			5911-6-3-901-XX
	14 W	20°	4000 K	890 lm	63 lm/W	•			5911-6-3-904-XX
			2700 K	810 lm	57 lm/W	•			5911-6-3-503-XX
			2700 K	1050 lm	75 lm/W	•			5911-B-3-503-XX
			3000 K	1110 lm	79 lm/W	•			5911-B-3-901-XX
	14 W	27°	4000 K	1160 lm	82 lm/W	•			5911-B-3-904-XX
			3000 K	1110 lm	79 lm/W		•		5911-B-4-901-XX
			3000 K	1110 lm	79 lm/W			•	5911-B-5-901-XX
			3000 K	860 lm	61 lm/W	•			5911-7-3-901-XX
	14 W	30°	4000 K	910 lm	65 lm/W	•			5911-7-3-904-XX
			2700 K	820 lm	58 lm/W	•			5911-7-3-503-XX
			3000 K	860 lm	61 lm/W		•		5911-7-4-901-XX
			2700 K	820 lm	58 lm/W			•	5911-7-5-503-XX
			3000 K	860 lm	61 lm/W			•	5911-7-5-901-XX
			3000 K	1010 lm	72 lm/W	•			5911-C-3-901-XX
	14 W	35°	4000 K	1050 lm	75 lm/W	•			5911-C-3-904-XX
			2700 K	960 lm	68 lm/W			•	5911-C-5-503-XX
OD-5912 	7 W	15°	2700 K	480 lm	68 lm/W	•			5912-A-3-883-XX
			3000 K	500 lm	71 lm/W	•			5912-A-3-980-XX
			4000 K	370 lm	52 lm/W	•			5912-A-3-981-XX
	7 W	22°	2700 K	460 lm	65 lm/W	•			5912-B-3-883-XX
			3000 K	480 lm	68 lm/W	•			5912-B-3-980-XX
			4000 K	360 lm	51 lm/W	•			5912-B-3-981-XX
	7 W	32°	2700 K	420 lm	60 lm/W	•			5912-C-3-883-XX
			3000 K	440 lm	62 lm/W	•			5912-C-3-980-XX
			4000 K	330 lm	47 lm/W	•			5912-C-3-981-XX
	14 W	9°	2700 K	1070 lm	76 lm/W	•			5912-5-3-503-XX
			3000 K	1130 lm	80 lm/W	•			5912-5-3-901-XX
			4000 K	1180 lm	84 lm/W	•			5912-5-3-904-XX
	14 W	18°	2700 K	1070 lm	76 lm/W	•			5912-A-3-503-XX
			3000 K	1130 lm	80 lm/W	•			5912-A-3-901-XX
			4000 K	1180 lm	84 lm/W	•			5912-A-3-904-XX
	14 W	20°	2700 K	810 lm	57 lm/W	•			5912-6-3-503-XX
			3000 K	850 lm	60 lm/W	•			5912-6-3-901-XX
			4000 K	890 lm	63 lm/W	•			5912-6-3-904-XX
	14 W	27°	2700 K	1050 lm	75 lm/W	•			5912-B-3-503-XX
			3000 K	1110 lm	79 lm/W	•			5912-B-3-901-XX
			4000 K	1160 lm	82 lm/W	•			5912-B-3-904-XX
	14 W	30°	2700 K	820 lm	58 lm/W	•			5912-7-3-503-XX
			3000 K	860 lm	61 lm/W	•			5912-7-3-901-XX
			4000 K	910 lm	65 lm/W	•			5912-7-3-904-XX
	14 W	35°	3000 K	1010 lm	72 lm/W	•			5912-C-3-901-XX
			4000 K	1050 lm	75 lm/W	•			5912-C-3-904-XX
OD-5913 	14 W	9°	2700 K	1070 lm	76 lm/W	•			5913-5-3-503-XX
			3000 K	1130 lm	80 lm/W	•			5913-5-3-901-XX
			4000 K	1180 lm	84 lm/W	•			5913-5-3-904-XX
	14 W	18°	2700 K	1070 lm	76 lm/W	•			5913-A-3-503-XX
			3000 K	1130 lm	80 lm/W	•			5913-A-3-901-XX
			4000 K	1180 lm	84 lm/W	•			5913-A-3-904-XX
	14 W	20°	2700 K	810 lm	57 lm/W	•			5913-6-3-503-XX
			3000 K	850 lm	60 lm/W	•			5913-6-3-901-XX
			4000 K	890 lm	63 lm/W	•			5913-6-3-904-XX
	14 W	27°	2700 K	1050 lm	75 lm/W	•			5913-B-3-503-XX
			3000 K	1110 lm	79 lm/W	•			5913-B-3-901-XX
			4000 K	1160 lm	82 lm/W	•			5913-B-3-904-XX
	14 W	30°	3000 K	860 lm	61 lm/W	•			5913-7-3-901-XX
			4000 K	910 lm	65 lm/W	•			5913-7-3-904-XX
	14 W	35°	3000 K	1010 lm	72 lm/W	•			5913-C-3-901-XX
			4000 K	1050 lm	75 lm/W	•			5913-C-3-904-XX

*Please contact sales team for special request.



SPOTT is a ground and wall mount spotlight. Accessories such as earth spike and tree strap are available for portable or temporary use. **SPOTT** is usually used to illuminate plants and trees, as well as signboards and other architectural tasks. It is suitable to light up objects from short to medium distance. The choices of beam angles are narrow, medium and wide. LED module and driver are made from market leader manufacturers.



www.unilamp.co.th/en/p/spott

Specification


- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module.
- On-Off / 1-10V / DALI control gear.
- Installation must be carried out according to the enclosed product manual.

Available Color




***Custom colors are available on request.*

SPOTT + Accessory kit for Pole Mount Solutions

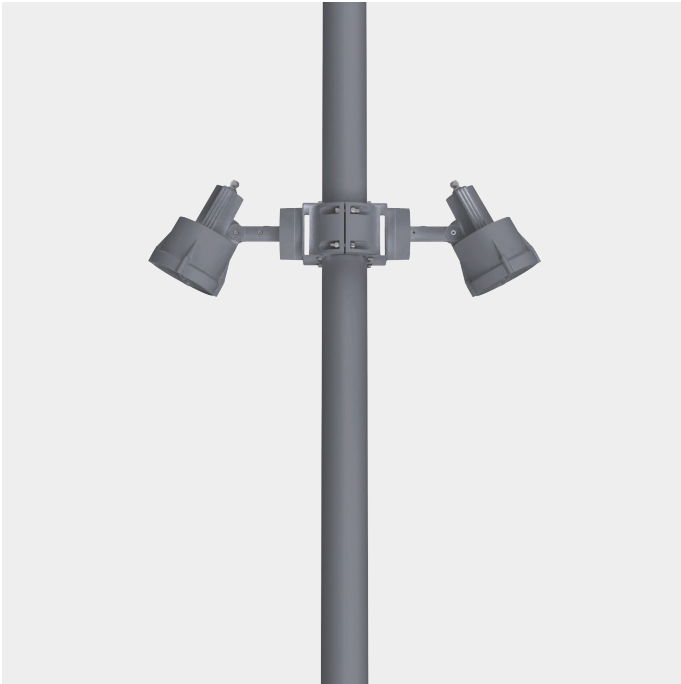

• MODULAR SOLUTIONS

▪ SPOTT + Accessory kit for Pole Mount Solutions

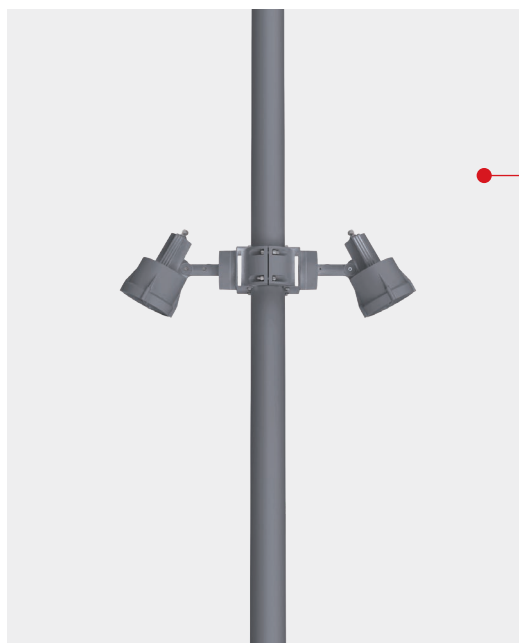


5901
SPOTT

+



AUN-CLP-0004-XX
Pole clamp,
pole Ø102-105mm

OR



AUN-CLP-0006-XX
Pole clamp,
Ø60-76mm

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole



5901
SPOTT

+




AUN-CLP-0008-XX
Pole clamp,
pole Ø102-105mm,
for wall or pole
mounting arm

OR



AUN-CLP-0009-XX
Pole clamp,
pole Ø60-76mm,
for wall or pole
mounting arm

+



AUN-MOT-0013-XX
Pole mounting
arm, for
1-3 projector

+




Aluminum Pole /
Steel Pole

+




AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

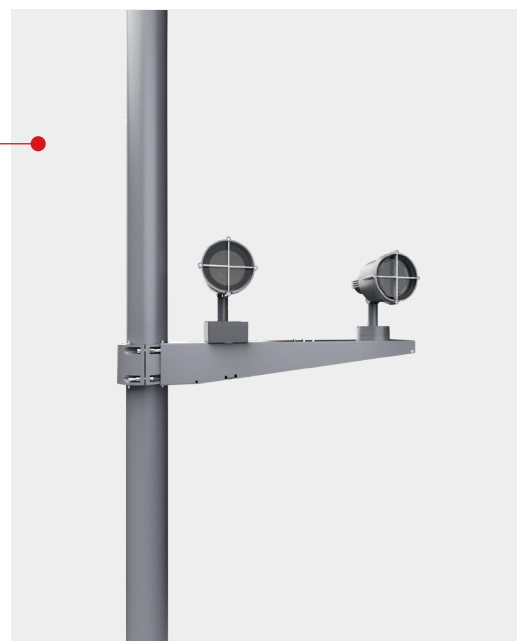

*Pole mounting arm for 1-3 projector is available for installation on 1 or 2 sides
*Please see Poles & Anchor bolt section for pole mounting options



SPOTT



SPOTT

Application Type : Projector

Subgroup : Circular

SPOTT / 5901


Luminaire Performance

2000 - 3780 lm

27 - 39 W

74 - 96 lm/W

Beam Options



Color Temperature

3000K/ 4000K

Controller

On-off

Input Voltage

220-240VAC 50/60HZ

Accessories



Ring louver



Earth spike



Tree strap



Pole clamp



Mounting arm



Anchor bolt



Aluminum pole



Steel pole



IP68 Connector



Pre-wired cable

*Please see Poles & Anchor bolt section for pole mounting options

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller	Ordering Code
							⏻	
SPOTT	OD-5901 	27 W	23° 48°	3000 K	2540 lm	94 lm/W	•	5901-6-3-887-XX
				3000 K	2000 lm	74 lm/W	•	5901-7-3-887-XX
		39 W	23°	3000 K	3680 lm	94 lm/W	•	5901-6-3-902-XX
				4000 K	3780 lm	96 lm/W	•	5901-6-3-905-XX
		39 W	48°	3000 K	2900 lm	74 lm/W	•	5901-7-3-902-XX

*Please contact sales team for special request.

NEWLY Added ALPHA

PROJECTOR

NEW!

Mini ALPHA Round – ID



NEW!

Medium ALPHA Round – ID



NEW!

Mini ALPHA Round Snoot

NEW!

Medium ALPHA Round [DMX]



ALPHA is an entirely new family of outdoor spot lights / flood lights engineered from scratch. The primary shapes and overall small dimensions makes it possible to install **ALPHA** in most professional and residential lighting applications. High quality polycarbonate optics provide accurate beam control and offer a wide selection of light distributions. **ALPHA** can be customized with accessories such as honeycombs, shields and various mounting solutions for poles and surfaces. The minimized amount of needed tools and usage of quick connectors simplifies the installation.



www.unilamp.co.th/en/p/alpha



Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module.
- Available with integrated driver or remote driver.
- Weather proof TPE grommet.
- Installation must be carried out according to the enclosed product manual.

Available Color



***Custom colors are available on request.*

Mini ALPHA Round ID without Base
+ Accessory kit for Short Pole




Medium ALPHA Round ID without Base
+ Accessory kit for Pole clamp



Mini ALPHA Round ID without Base
+ Accessory kit for Pole mount adaptor




Medium ALPHA Round ID without Base
+ Accessory kit for Aluminum Earth Spike

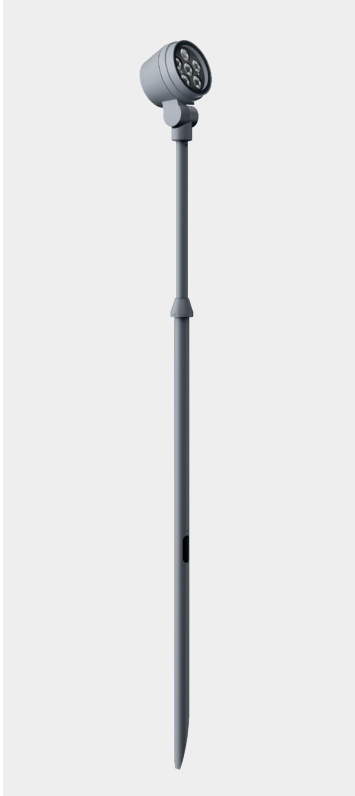

Mini ALPHA Square – ID
+ Accessory kit for Pole mount adaptor




• MODULAR SOLUTIONS

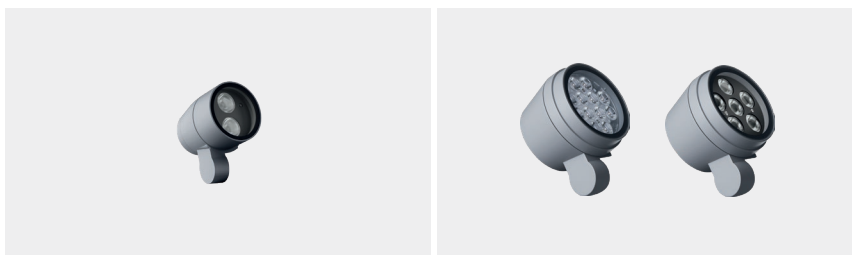

Accessory		Mini ALPHA Round – ID without Base	Medium ALPHA Round – ID without Base
	Honey Comb Lover	—	•
	Softening Filter	—	•
	IP68 connection device, cable diameter 7–11.5mm	•	•
	IP68 connection device, cable diameter 5–9.5mm	•	•
	Anchor bolt kit, aluminium pole	•	•
	Anchor bolt kit, pole diameter 102mm and 151x102mm, galvanized steel pole	•	•
	Anchor bolt kit, bollard	•	•
	Anchor bolt kit, aluminium pole	•	•
	Tree strap, small mounting base	•	•
	Glare shield cap	•	•
	Pole mounting arm, for 1–3 projector	•	•
	Mounting base, rotateable	•	•
	Earth spike, GFR polymer	•	•
	Earth spike, L= 900mm, aluminium	•	•
	Earth spike, L= 1390–1760mm, aluminium, length adjustable	•	•
	Outrigger arm, L= 740mm	•	•


• MODULAR SOLUTIONS

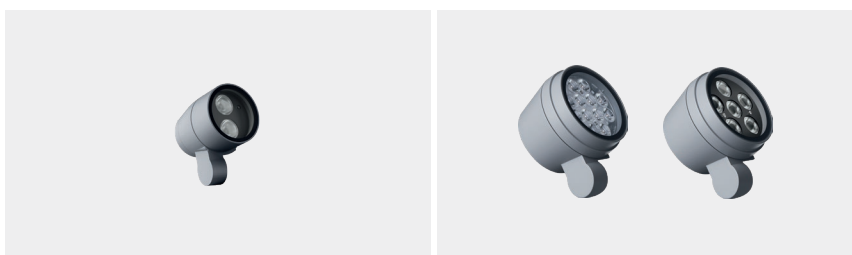


Accessory		Mini ALPHA Round – ID without Base	Medium ALPHA Round – ID without Base
	Cylindrical aluminium pole, diameter 105mm, H= 522mm	•	•
	Pole mount adaptor, rectangular pole	•	•
	Pole mount adaptor, pole diameter 60mm	•	•
	Pole mount adaptor, pole diameter 76mm	•	•
	Pole mount adaptor, pole diameter 102-105mm	•	•
	Pole clamp, pole diameter 60-76mm, single side luminaire mounting	•	•
	Pole clamp, pole diameter 60-76mm, double sided luminaire mounting	•	•
	Pole clamp, pole diameter 102-105mm, single side luminaire mounting	•	•
	Pole clamp, pole diameter 102-105mm, double sided luminaire mounting	•	•
	Pole clamp, pole diameter 60-76mm, for wall or pole mounting arm	•	•
	Pole clamp, pole diameter 102-105mm, for wall or pole mounting arm	•	•
	Pole clamp, pole diameter 60-76mm	•	•
	Pole clamp, pole diameter 102-105mm	•	•
	Cylindrical aluminium pole, diameter 105mm, H= 3500mm, with cable outlets and top cap	•	•
	Cylindrical aluminium pole, diameter 105mm, H= 4000mm, with cable outlets and top cap	•	•
	Cylindrical hot-dip galvanized steel pole, diameter 102mm, H= 4000mm, with cable outlets and top cap	•	•
	Cylindrical hot-dip galvanized steel pole, diameter 102mm, H= 5000mm, with cable outlets and top cap	•	•

• MODULAR SOLUTIONS

ALPHA + Accessory kit for Ground mount solutions

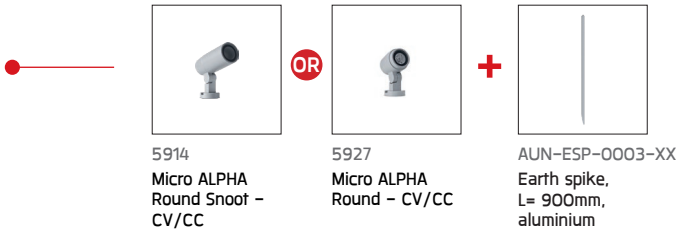


OR

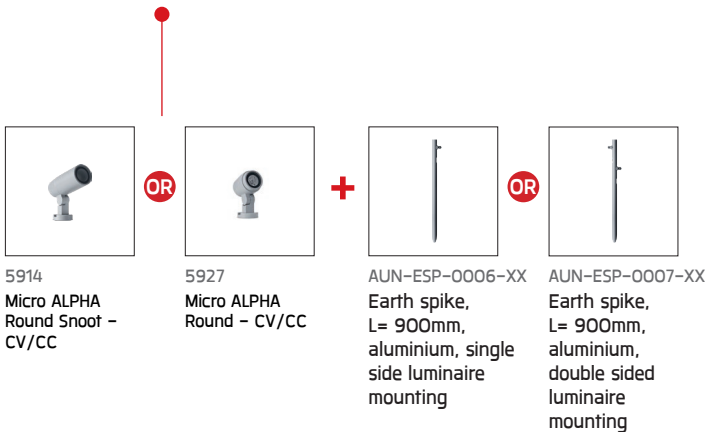

• MODULAR SOLUTIONS

ALPHA + Accessory kit for Ground mount solutions

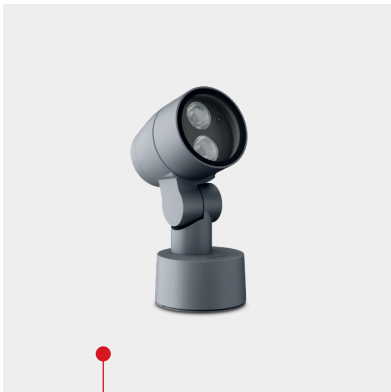

5972 / 5973
Mini ALPHA
Round ID



AUN-MOT-0052-XX
Mounting base,
rotateable, On-Off



5972 / 5973
Mini ALPHA
Round ID




AUN-POL-0188-XX
Cylindrical
aluminium pole,
diameter 105mm,
H= 522mm




AUN-ACB-0014-00
Anchor bolt kit,
bollard


ALPHA + Accessory kit for Wall mount solutions

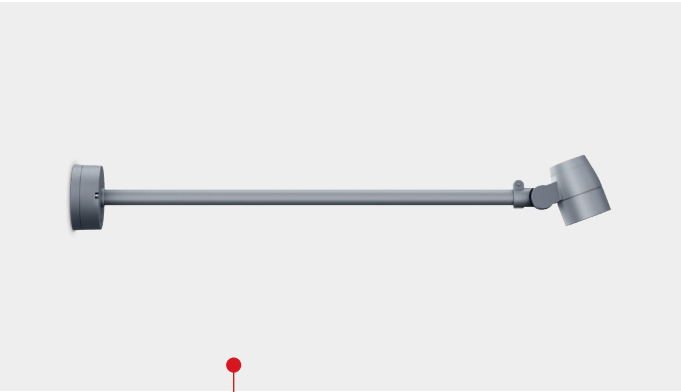

5972 / 5973
Mini ALPHA
Round ID



AUN-MOT-0053-XX
Outrigger arm,
L= 740mm,
On-Off

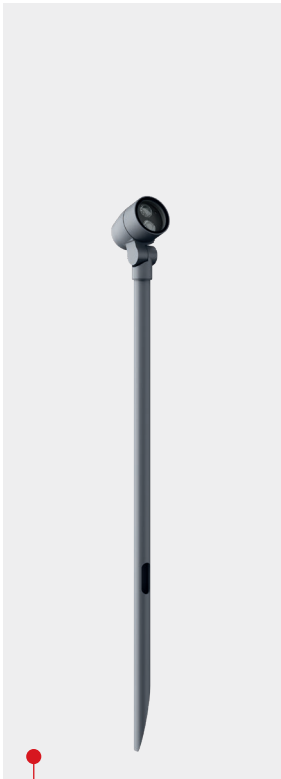

OR



5972 / 5973
Mini ALPHA
Round ID







AUN-ESP-0021-XX
Earth spike,
L= 900mm,
aluminium, On-Off



AUN-ESP-0022-XX
Earth spike,
L= 1390-1760mm,
aluminium, length
adjustable, On-Off

• MODULAR SOLUTIONS

ALPHA + Accessory kit for pole attached solutions

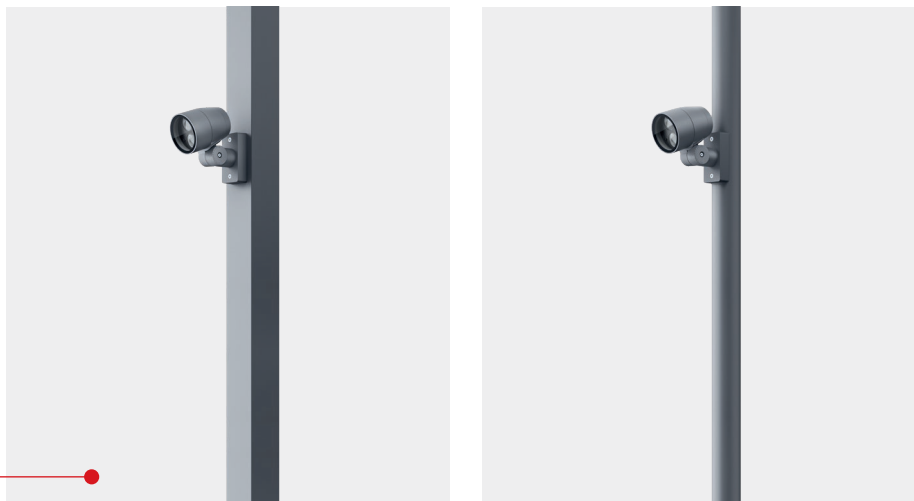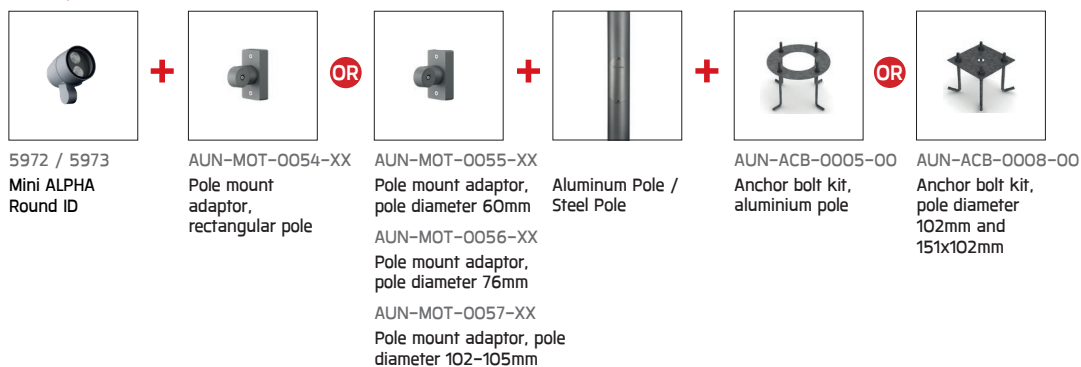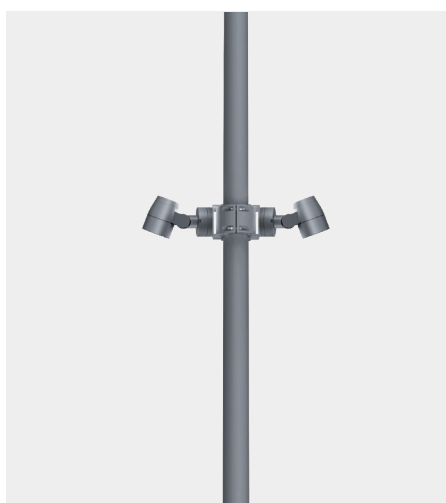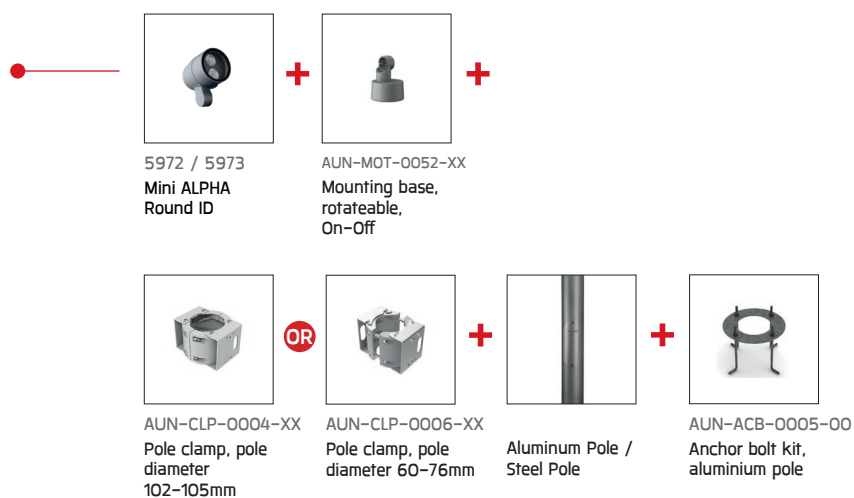

• MODULAR SOLUTIONS

ALPHA + Accessory kit for pole mount solutions



*Pole mounting arm for 1-3 projector is available for installation on 1 or 2 sides
*Please see Poles & Anchor bolt section for pole mounting options




5972 / 5973
Mini ALPHA
Round ID

+



AUN-MOT-0052-XX
Mounting base,
rotateable, On-Off

+



AUN-MOT-0013-XX
Pole mounting
arm, for 1-3
projector

+



AUN-CLP-0008-XX
Pole clamp, pole
diameter 102-
105mm, for wall or
pole mounting arm

OR



AUN-CLP-0009-XX
Pole clamp, pole
diameter
60-76mm, for wall
or pole mounting
arm

+




Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor bolt kit,
aluminium pole

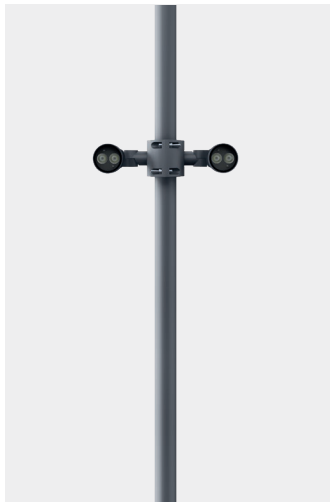



5972 / 5973
Mini ALPHA
Round ID

+



AUN-CLP-0052-XX
Pole clamp,
pole diameter
60-76mm, single
side luminaire
mounting, On-Off

OR



AUN-CLP-0053-XX
Pole clamp, pole
diameter
60-76mm, double
sided luminaire
mounting, On-Off

OR



AUN-CLP-0054-XX
Pole clamp, pole
diameter
102-105mm,
single side
luminaire
mounting, On-Off

OR



AUN-CLP-0055-XX
Pole clamp, pole
diameter
102-105mm,
double sided
luminaire
mounting, On-Off

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor bolt kit,
aluminium pole

OR



AUN-ACB-0008-00
Anchor bolt kit,
pole diameter
102mm and
151x102mm,
galvanized steel
pole

• MODULAR SOLUTIONS

ALPHA + Accessory kit for Ground mount solutions



OR



5962
Medium ALPHA Round ID
without Base

+



AUN-MOT-0021-XX
Mounting base,
rotateable,
On-Off

OR



AUN-MOT-0022-XX
Mounting base,
rotateable, 1-10V
or DALI



5962
Medium ALPHA Round ID
without Base

+




AUN-POL-0044-XX
Cylindrical
aluminium pole,
diameter 105mm,
H= 522mm


+



AUN-ACB-0014-00
Anchor bolt kit,
bollard

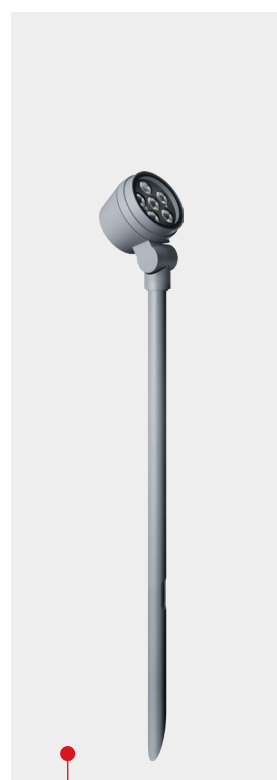

OR

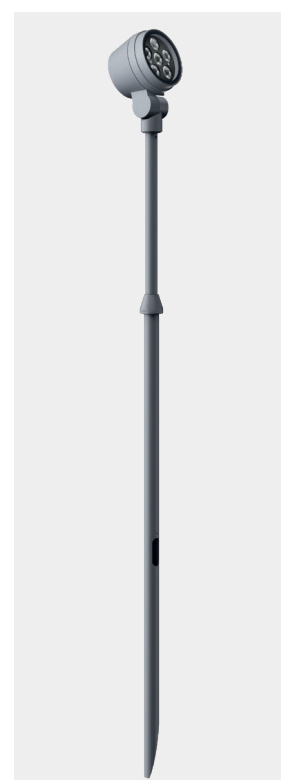


5962
Medium ALPHA Round ID
without Base

+




AUN-ESP-0009-XX
Earth spike,
L= 900mm,
aluminium, 1-10V
or DALI

OR




AUN-ESP-0024-XX
Earth spike,
L= 1390-1760mm,
aluminium, length
adjustable, 1-10V or DALI

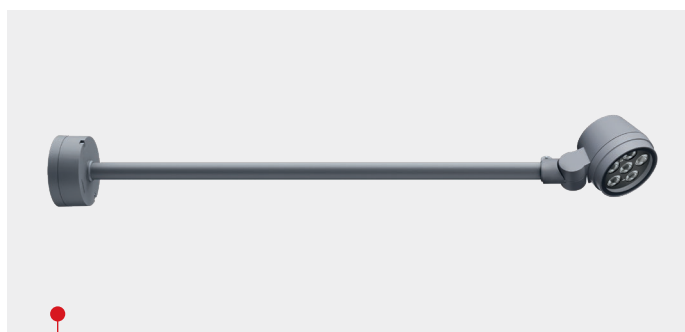

5962
Medium ALPHA Round ID
without Base

+



AUN-MOT-0019-XX
Outrigger arm,
L= 740mm,
1-10V or DALI


• MODULAR SOLUTIONS

ALPHA + Accessory kit for pole attached solutions



5962
Medium ALPHA Round ID
without Base

+



AUN-MOT-0039-XX
Pole mount
adaptor,
rectangular pole,
1-10V or DALI

OR



AUN-MOT-0033-XX
Pole mount adaptor,
pole diameter 60mm

AUN-MOT-0035-XX
Pole mount adaptor,
pole diameter 76mm

AUN-MOT-0037-XX
Pole mount adaptor, pole
diameter 102-105mm

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor bolt kit,
aluminium pole

OR



AUN-ACB-0008-00
Anchor bolt kit,
pole diameter
102mm and
151x102mm,
galvanized steel
pole



•



5962
Medium ALPHA Round ID
without Base

+



AUN-MOT-0021-XX
Mounting base,
rotateable,
On-Off

OR



AUN-MOT-0022-XX
Mounting base,
rotateable, 1-10V
or DALI

+



AUN-CLP-0004-XX
Pole clamp, pole
diameter
102-105mm

OR



AUN-CLP-0006-XX
Pole clamp, pole
diameter 60-76mm

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor bolt kit,
aluminium pole

• MODULAR SOLUTIONS

ALPHA + Accessory kit for pole mount solutions



*Pole mounting arm for 1-3 projector is available for installation on 1 or 2 sides
*Please see Poles & Anchor bolt section for pole mounting options



5962
Medium ALPHA Round ID
without Base



AUN-MOT-0021-XX
Mounting base,
rotateable,
On-Off




AUN-MOT-0022-XX
Mounting base,
rotateable, 1-10V
or DALI



AUN-CLP-0008-XX
Pole clamp, pole
diameter 102-
105mm, for wall or
pole mounting arm



AUN-CLP-0009-XX
Pole clamp, pole
diameter 60-76mm,
for wall or pole
mounting arm







AUN-MOT-0013-XX
Pole mounting
arm, for 1-3
projector



Aluminum Pole /
Steel Pole



AUN-ACB-0005-00
Anchor bolt kit,
aluminium pole

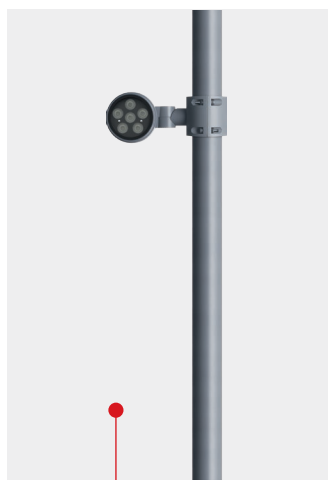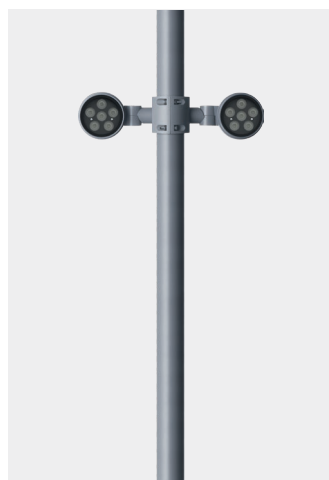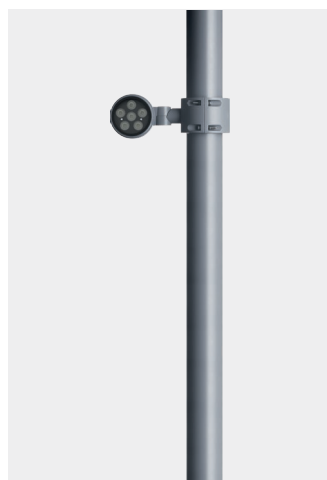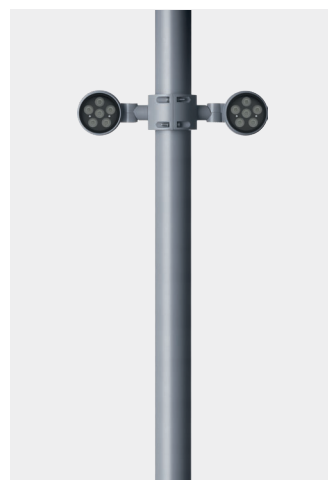

5962
Medium ALPHA Round ID
without Base



AUN-CLP-0041-XX
Pole clamp, pole
diameter
60-76mm, single
side luminaire
mounting



AUN-CLP-0045-XX
Pole clamp, pole
diameter
60-76mm, double
sided luminaire
mounting



AUN-CLP-0043-XX
Pole clamp, pole
diameter
102-105mm, single
side luminaire
mounting



AUN-CLP-0047-XX
Pole clamp, pole
diameter
102-105mm, double
sided luminaire
mounting



Aluminum Pole /
Steel Pole



AUN-ACB-0005-00
Anchor bolt kit,
aluminium pole



AUN-ACB-0008-00
Anchor bolt kit, pole diameter
102mm and 151x102mm,
galvanized steel pole

• MODULAR SOLUTIONS

ALPHA + Accessory kit for pole mount solutions



*Pole mounting arm for 1-3 projector is available for installation on 1 or 2 sides
*Please see Poles & Anchor bolt section for pole mounting options



5921
Mini ALPHA
Round - CC

OR



5922
Mini ALPHA Round
Gear/Gear CVDA

OR



5964
Mini ALPHA
Round Snoot

OR



5965
Mini ALPHA Round Snoot
Gear/Gear CVDA

OR



5960
Mini ALPHA
Square - ID

OR



5943
Mini ALPHA
Square

OR



5945
Mini ALPHA Square
Gear/Gear CVDA



5924
Medium ALPHA Round

OR



5925
Medium ALPHA
Round - Gear

OR



5925
Medium ALPHA
Round - Gear (DMX)

OR



5967
Medium ALPHA
Round Snoot

OR




5968
Medium ALPHA
Round Snoot - Gear

OR



5944
Medium ALPHA
Square



AUN-MOT-0013-XX
Pole mounting
arm, for 1-3
projector

+



AUN-CLP-0008-XX
Pole clamp, pole
diameter
102-105mm,
for wall or pole
mounting arm

OR



AUN-CLP-0009-XX
Pole clamp, pole
diameter
60-76mm,
for wall or pole
mounting arm

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor bolt kit,
aluminium pole

• MODULAR SOLUTIONS

ALPHA + Accessory kit for pole mount solutions



5921
Mini ALPHA
Round - CC

OR



5922
Mini ALPHA Round
Gear/Gear CVDA

OR



5964
Mini ALPHA
Round Snoot

OR



5965
Mini ALPHA Round Snoot
Gear/Gear CVDA

OR



5960
Mini ALPHA
Square - ID

OR



5943
Mini ALPHA
Square

OR



5945
Mini ALPHA Square
Gear/Gear CVDA



5924
Medium ALPHA
Round

OR




5925
Medium ALPHA
Round - Gear

OR



5925
Medium ALPHA
Round - Gear [DMX]

OR



5967
Medium ALPHA
Round Snoot

OR



5968
Medium ALPHA
Round Snoot - Gear

OR



5944
Medium ALPHA
Square



OR



AUN-CLP-0006-XX
Pole clamp, pole
diameter 60-76mm

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor bolt kit,
aluminium pole



ศิลปศาสตร์ มหาวิทยาลัยมหิดล

F PHARMACY MAHIDOL UNIVERSITY

100 ปี ขัตติยราช
ประดิษฐ์ หาดงู

งานแรกและอยู่กึ่งตั้ง
กัลป์ศาสตร์
ยาสมัยมหิดล


can go everywhere"

<https://pharmacy.mahidol.ac.th/Pradit190/>


ALPHA



Micro ALPHA Round Snoot
CC / CV

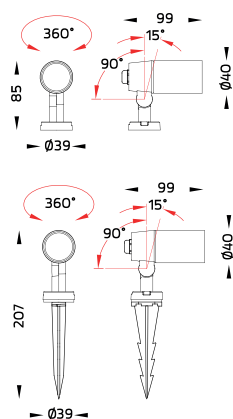

Micro ALPHA Round
CC / CV

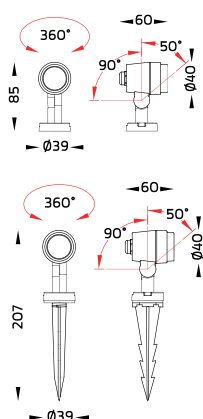

Buddha hall Maha Mongkhon at faculty pharmacy,
Mahidol university, Bangkok – THAILAND

ALPHA


Application Type : Projector
Subgroup : Circular

Micro ALPHA Round Snoot – CV / 5914
Micro ALPHA Round Snoot – CC / 5915
Micro ALPHA Round – CV / 5927
Micro ALPHA Round – CC / 5928

Luminaire Performance

100 – 360 lm
3.3 – 3.9 W
25 – 103 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K


Controller

Remote

Input Voltage


12Vdc/24Vdc
1200mA, 3.17VDC, UIN MAX 50VDC

Accessories

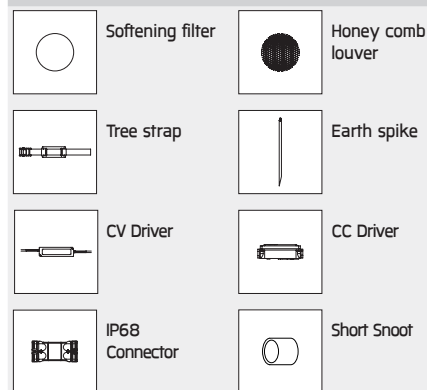





Mini ALPHA Round
CC




Mini ALPHA Round
Gear




Mini ALPHA Round
Gear CVDA



Mini ALPHA Round – ID



Mini ALPHA Round – ID
without Base



Arbour Hotel and Residence Pattaya,
Pattaya – THAILAND

ALPHA

Application Type : Projector
Subgroup : Circular

Mini ALPHA Round – CC / 5921
Mini ALPHA Round / 5922
Mini ALPHA Round – CVDA / 5922
Mini ALPHA Round – ID/ 5972
Mini ALPHA Round – ID/ 5973


NEW!

NEW!

Luminaire Performance

260 – 1290 lm
5 – 15 W
52 – 105 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

DALI/ 1-10V/ On-Off/ On-Off / DALI/ Remote

Input Voltage

24Vdc
220-240VAC 50/60HZ
1050mA, 11.9Vdc, Uin max 150Vdc

Accessories


	Honey comb louver		Softening filter
	Earth spike		Tree strap
	Pre-wired cable		Pole clamp
	Mounting Arm		Anchor bolt
	Aluminum pole		Steel pole
	CC Driver		CV Driver
	IP68 Connector		Glare Shield Cap

*Please see Poles & Anchor bolt section for pole mounting options

ALPHA



Mini ALPHA Round Arm

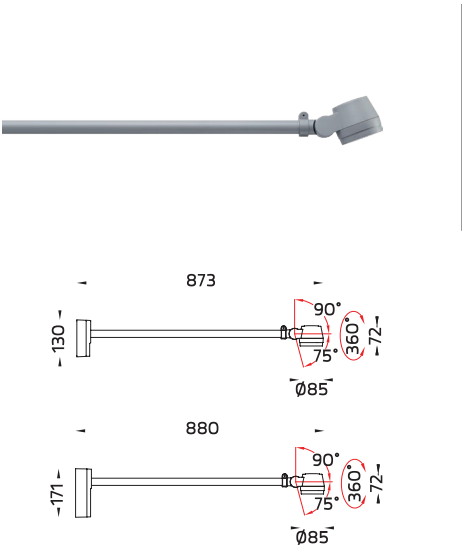

ALPHA


Application Type : Projector
Subgroup : Circular

Mini ALPHA Round Arm / 5923	
Luminaire Performance	
710 – 1250 lm	
10 – 15 W	
66 – 88 lm/W	
Beam Options	
Narrow	Medium
Wide	Elliptical H
Color Temperature	
3000K/ 4000K	
Controller	
On-Off/ DALI	
Input Voltage	
220–240VAC 50/60HZ	


Accessories	
	Honey comb louver
	Softening filter
	Glare Shield Cap
	Pre-wired cable
	CV Driver



Mini ALPHA Round Snoot
CC

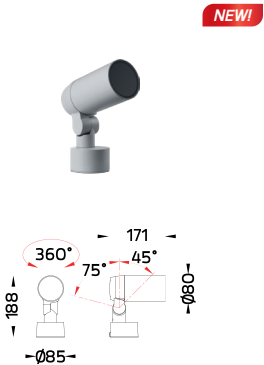


Mini ALPHA Round Snoot
Gear

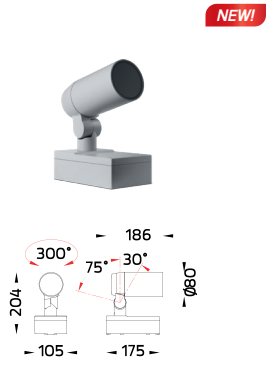

Buddha hall Maha Mongkhon at faculty pharmacy,
Mahidol university - Bangkok, THAILAND

Mini ALPHA Round Snoot
Gear CVDA

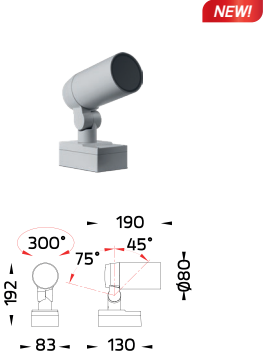

ALPHA

NEW!

Application Type : Projector
Subgroup : Circular

Mini ALPHA Round Snoot - CC / 5964
Mini ALPHA Round Snoot / 5965
Mini ALPHA Round Snoot - CVDA / 5965

Luminaire Performance

260 - 970 lm
10 - 16 W
23 - 69 lm/W

Beam Options



Color Temperature

2700K / 3000K / 4000K


Controller

DALI / 1-10V / On-Off / On-Off / DALI / Remote

Input Voltage

24Vdc
220-240VAC 50/60HZ
1050mA, 11.9Vdc, Uin max 150Vdc

Accessories

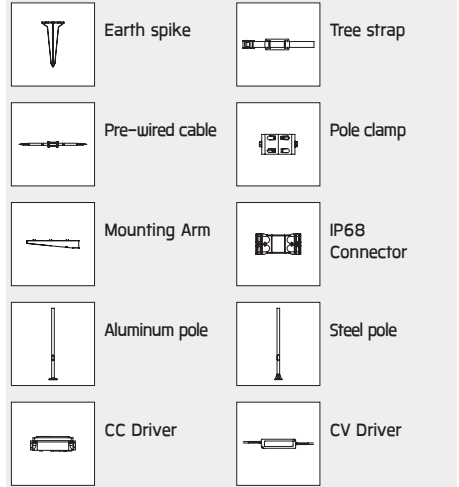

*Please see Poles & Anchor bolt section for pole mounting options






Medium ALPHA Round CC




23W / 25W




Medium ALPHA Round Gear



Remote



DALI / 1-10V /
On-Off/ CASAMBI




RGBW

Medium ALPHA Round Gear [DMX]



DMX




NEW!

Medium ALPHA Round – ID without Base

NEW!



7°



ALPHA

Application Type : Projector
Subgroup : Circular

Medium ALPHA Round – CC / 5924

Medium ALPHA Round / 5925

Medium ALPHA Round – CC / 5925

Medium ALPHA Round [DMX] / 5925

Medium ALPHA Round – ID / 5962

NEW!

NEW!

Luminaire Performance

850 – 2860 lm

14 – 28 W

53 – 124 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K/ RGBW

Controller

DALI/ 1-10V/ On-Off/ Remote/ DMX/ CASAMBI

Input Voltage

220–240Vac 50/60Hz

700mA, 32.8Vdc, Uin MAX 500Vdc

700mA, 34.8Vdc, Uin max 150Vdc

700mA, 34.9Vdc, Uin max 500Vdc

700mA, 4CHx5Vdc–6.5Vdc, Uin max 150Vdc

Accessories


	Honey comb louver		Softening filter
	Earth spike		Tree strap
	Pre-wired cable		Pole clamp
	Mounting Arm		Anchor bolt
	Aluminum pole		Steel pole
	CC Driver		IP68 Connector
	Glare Shield Cap		RGBW DALI Driver

*Please see Poles & Anchor bolt section for pole mounting options


ALPHA



Medium ALPHA Round Snoot
CC



Medium ALPHA Round Snoot
Gear



ALPHA

Application Type : Projector
Subgroup : Circular

Medium ALPHA Round Snoot – CC / 5967

Medium ALPHA Round Snoot / 5968


Luminaire Performance

570 – 1630 lm

19 – 27 W

28 – 63 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K


Controller

DALI/ 1-10V/ On-Off/ Remote

Input Voltage

220-240VAC 50/60HZ
700mA, 35.8Vdc, Uin max 150Vdc


Accessories

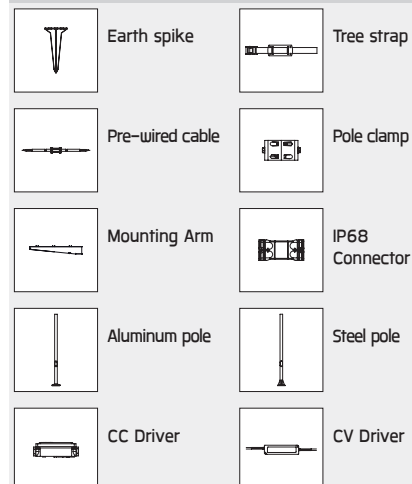



*Please see Poles & Anchor bolt section for pole mounting options




Mini ALPHA Square
CC

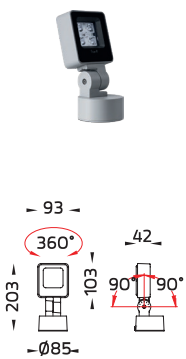

Mini ALPHA Square
Gear

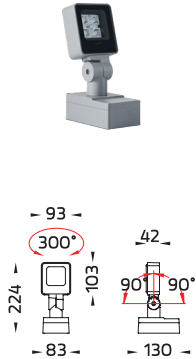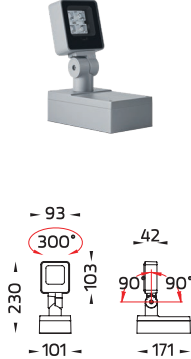

Mini ALPHA Square – ID

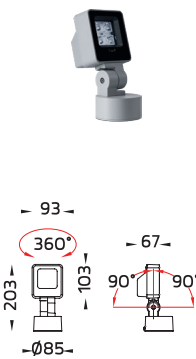

ALPHA

Application Type : Projector
Subgroup : Rectangular

Mini ALPHA Square – CC / 5943
Mini ALPHA Square / 5945
Mini ALPHA Square – ID/ 5960

Luminaire Performance

470 – 1270 lm
8 – 15 W
58 – 93 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

DALI/ On-Off/ Remote

Input Voltage

220–240VAC 50/60HZ
1050mA, 11.8Vdc, Uin max 500Vdc
1050mA, 12.5Vdc, Uin max 500Vdc

Accessories

	Honey comb louver		Softening filter
	Earth spike		Tree strap
	Pre-wired cable		Pole clamp
	Mounting Arm		Anchor bolt
	Aluminum pole		Steel pole
	CC Driver		CV Driver
	IP68 Connector		Glare Shield Cap

*Please see Poles & Anchor bolt section for pole mounting options

ALPHA

CE


TUV SUD

IP66

IK08
06




LED


3
SDCM

CRI
>80

UniShield16

UniBlock

Mini ALPHA Square Arm – ID



ALPHA

Application Type : Projector
Subgroup : Rectangular

Mini ALPHA Square Arm – ID / 5961

Luminaire Performance

470 – 690 lm
8 W
58 – 86 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

On-Off

Input Voltage

220-240VAC 50/60HZ

Accessories



Honey comb
louver




Softening filter



Glare Shield
Cap



Medium ALPHA Square



ALPHA

Application Type : Projector
Subgroup : Rectangular

Medium ALPHA Square / 5944	
Luminaire Performance	
1510 – 1930 lm	
19 W	
79 – 101 lm/W	
Beam Options	
Narrow	Medium
Wide	Elliptical H
Elliptical V	
Color Temperature	
3000K/ 4000K	
Controller	
DALI/ 1-10V/ On-Off	
Input Voltage	
220-240VAC 50/60HZ	

Accessories	
	Honey comb louver
	Softening filter
	Earth spike
	Tree strap
	Pre-wired cable
	Pole clamp
	Mounting Arm
	Anchor bolt
	Aluminum pole
	Steel pole
	CV Driver
	IP68 Connector
	Glare Shield Cap

*Please see Poles & Anchor bolt section for pole mounting options

ALPHA

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller							Ordering Code
											CASAMBI		REMOTE	
Micro ALPHA Round Snoot	OD-5914	 CV	10°	2700 K	220 lm	66 lm/W							•	5914-A-2-561-XX
	3000 K			220 lm	66 lm/W						•	5914-A-2-562-XX		
	19°		3000 K	150 lm	45 lm/W						•	5914-6-2-562-XX		
			4000 K	160 lm	48 lm/W						•	5914-6-2-563-XX		
	OD-5915	 CC	10°	2700 K	100 lm	30 lm/W						•	5914-B-2-561-XX	
				3000 K	100 lm	30 lm/W						•	5914-B-2-562-XX	
			19°	2700 K	170 lm	43 lm/W						•	5915-A-2-561-XX	
				4000 K	180 lm	46 lm/W						•	5915-A-2-562-XX	
	Micro ALPHA Round	OD-5927	 CV	12°	2700 K	320 lm	96 lm/W						•	5915-A-2-563-XX
					3000 K	320 lm	96 lm/W						•	5915-A-2-561-XX
				25°	4000 K	330 lm	100 lm/W						•	5915-A-2-562-XX
					2700 K	330 lm	100 lm/W						•	5915-A-2-563-XX
OD-5928		 CC	46°	3000 K	250 lm	75 lm/W						•	5915-6-2-561-XX	
				4000 K	260 lm	78 lm/W						•	5915-6-2-562-XX	
			42°/14°	2700 K	270 lm	81 lm/W						•	5915-6-2-563-XX	
				3000 K	270 lm	81 lm/W						•	5915-B-2-561-XX	
Mini ALPHA Round		OD-5921	 CC	12°	2700 K	1200 lm	92 lm/W						•	5915-B-2-562-XX
					3000 K	1200 lm	92 lm/W						•	5915-B-2-563-XX
				29°	4000 K	340 lm	103 lm/W						•	5915-H-2-561-XX
					2700 K	330 lm	100 lm/W						•	5915-H-2-562-XX
	OD-5922	 On/Off/ 1-10V	42°/14°	2700 K	280 lm	71 lm/W						•	5915-H-2-563-XX	
				3000 K	280 lm	71 lm/W						•	5915-N-2-561-XX	
			14°/42°	4000 K	300 lm	76 lm/W						•	5915-N-2-562-XX	
				2700 K	300 lm	76 lm/W						•	5915-N-2-563-XX	
	Mini ALPHA Round	OD-5921	 CC	12°	2700 K	350 lm	89 lm/W						•	5915-N-2-561-XX
					2700 K	360 lm	92 lm/W						•	5915-N-2-562-XX
				25°	3000 K	360 lm	92 lm/W						•	5915-N-2-563-XX
					2700 K	280 lm	71 lm/W						•	5915-N-2-561-XX
OD-5922		 On/Off [10W]	46°	3000 K	280 lm	71 lm/W						•	5915-N-2-562-XX	
				4000 K	300 lm	76 lm/W						•	5915-N-2-563-XX	
			42°/14°	2700 K	300 lm	76 lm/W						•	5915-N-2-561-XX	
				3000 K	300 lm	76 lm/W						•	5915-N-2-562-XX	
Mini ALPHA Round		OD-5921	 CC	12°	2700 K	1200 lm	92 lm/W						•	5915-N-2-561-XX
					3000 K	1200 lm	92 lm/W						•	5915-N-2-562-XX
				29°	4000 K	1290 lm	99 lm/W						•	5915-N-2-563-XX
					2700 K	1180 lm	90 lm/W						•	5915-N-2-561-XX
	OD-5922	 On/Off [10W]	50°	3000 K	1180 lm	90 lm/W						•	5915-N-2-562-XX	
				4000 K	1270 lm	97 lm/W						•	5915-N-2-563-XX	
			44°/13°	2700 K	990 lm	76 lm/W						•	5915-N-2-561-XX	
				3000 K	990 lm	76 lm/W						•	5915-N-2-562-XX	
	Mini ALPHA Round	OD-5921	 CC	12°	2700 K	1160 lm	89 lm/W						•	5915-N-2-561-XX
					3000 K	1160 lm	89 lm/W						•	5915-N-2-562-XX
				29°	4000 K	1250 lm	96 lm/W						•	5915-N-2-563-XX
					2700 K	1160 lm	89 lm/W						•	5915-N-2-561-XX
OD-5922		 On/Off [10W]	13°/44°	3000 K	1160 lm	89 lm/W						•	5915-N-2-562-XX	
				4000 K	1250 lm	96 lm/W						•	5915-N-2-563-XX	
			12°	2700 K	880 lm	88 lm/W	•						5915-N-2-561-XX	
				3000 K	880 lm	88 lm/W	•						5915-N-2-562-XX	
Mini ALPHA Round		OD-5921	 CC	12°	2700 K	880 lm	88 lm/W						•	5915-N-2-563-XX
					3000 K	880 lm	88 lm/W						•	5915-N-2-561-XX
				29°	4000 K	880 lm	88 lm/W						•	5915-N-2-562-XX
					2700 K	850 lm	85 lm/W						•	5915-N-2-563-XX
	OD-5922	 On/Off [10W]	50°	3000 K	850 lm	85 lm/W						•	5915-N-2-561-XX	
				4000 K	850 lm	85 lm/W						•	5915-N-2-562-XX	
			44°/13°	2700 K	710 lm	71 lm/W						•	5915-N-2-563-XX	
				3000 K	710 lm	71 lm/W						•	5915-N-2-561-XX	
	Mini ALPHA Round	OD-5921	 CC	12°	2700 K	710 lm	71 lm/W						•	5915-N-2-562-XX
					3000 K	710 lm	71 lm/W						•	5915-N-2-563-XX
				29°	4000 K	760 lm	76 lm/W						•	5915-N-2-561-XX
					2700 K	800 lm	80 lm/W						•	5915-N-2-562-XX
OD-5922		 On/Off [10W]	13°/44°	2700 K	800 lm	80 lm/W						•	5915-N-2-563-XX	
				3000 K	800 lm	80 lm/W						•	5915-N-2-561-XX	
			12°	3000 K	1200 lm	92 lm/W						•	5915-N-2-562-XX	
				4000 K	990 lm	76 lm/W						•	5915-N-2-563-XX	
Mini ALPHA Round		OD-5921	 CC	12°	2700 K	1200 lm	80 lm/W						•	5915-N-2-561-XX
					3000 K	1200 lm	80 lm/W						•	5915-N-2-562-XX
				29°	4000 K	1290 lm	86 lm/W						•	5915-N-2-563-XX
					2700 K	1200 lm	80 lm/W						•	5915-N-2-561-XX
	OD-5922	 On/Off [10W]	13°/44°	2700 K	1180 lm	78 lm/W						•	5915-N-2-562-XX	
				3000 K	1180 lm	78 lm/W						•	5915-N-2-563-XX	
			50°	4000 K	1180 lm	78 lm/W						•	5915-N-2-561-XX	
				2700 K	990 lm	66 lm/W						•	5915-N-2-562-XX	
	Mini ALPHA Round	OD-5921	 CC	12°	3000 K	990 lm	66 lm/W						•	5915-N-2-563-XX
					4000 K	990 lm	66 lm/W						•	5915-N-2-561-XX
				29°	2700 K	990 lm	66 lm/W						•	5915-N-2-562-XX
					3000 K	990 lm	66 lm/W						•	5915-N-2-563-XX
OD-5922		 On/Off [10W]	50°	2700 K	990 lm	66 lm/W						•	5915-N-2-561-XX	
				3000 K	990 lm	66 lm/W						•	5915-N-2-562-XX	
			12°	4000 K	1180 lm	78 lm/W						•	5915-N-2-563-XX	
				2700 K	1180 lm	78 lm/W						•	5915-N-2-561-XX	
Mini ALPHA Round		OD-5921	 CC	12°	3000 K	990 lm	66 lm/W						•	5915-N-2-562-XX
					4000 K	990 lm	66 lm/W						•	5915-N-2-563-XX
				29°	2700 K	990 lm	66 lm/W						•	5915-N-2-561-XX
					3000 K	990 lm	66 lm/W						•	5915-N-2-562-XX
	OD-5922	 On/Off [10W]	50°	2700 K	990 lm	66 lm/W						•	5915-N-2-563-XX	
				3000 K	990 lm	66 lm/W						•	5915-N-2-561-XX	
			12°	4000 K	1180 lm	78 lm/W						•	5915-N-2-562-XX	
				2700 K	1180 lm	78 lm/W						•	5915-N-2-563-XX	
	Mini ALPHA Round	OD-5921	 CC	12°	3000 K	990 lm	66 lm/W						•	5915-N-2-561-XX
					4000 K	990 lm	66 lm/W						•	5915-N-2-562-XX
				29°	2700 K	990 lm	66 lm/W						•	5915-N-2-563-XX
					3000 K	990 lm	66 lm/W						•	5915-N-2-561-XX
OD-5922		 On/Off [10W]	50°	2700 K	990 lm	66 lm/W						•	5915-N-2-562-XX	
				3000 K	990 lm	66 lm/W						•	5915-N-2-563-XX	
			12°	4000 K	1180 lm	78 lm/W						•	5915-N-2-561-XX	
				2700 K	1180 lm	78 lm/W						•	5915-N-2-562-XX	
Mini ALPHA Round		OD-5921	 CC	12°	3000 K	990 lm	66 lm/W						•	5915-N-2-563-XX
					4000 K	990 lm	66 lm/W						•	5915-N-2-561-XX
				29°	2700 K	990 lm	66 lm/W						•	5915-N-2-562-XX
					3000 K	990 lm	66 lm/W						•	5915-N-2-563-XX
	OD-5922	 On/Off [10W]	50°	2700 K	990 lm	66 lm/W						•	5915-N-2-561-XX	
				3000 K	990 lm	66 lm/W						•	5915-N-2-562-XX	
			12°	4000 K	1180 lm	78 lm/W						•	5915-N-2-563-XX	
				2700 K	1180 lm	78 lm/W						•	5915-N-2-561-XX	
	Mini ALPHA Round	OD-5921	 CC	12°	3000 K	990 lm	66 lm/W						•	5915-N-2-562-XX
					4000 K	990 lm	66 lm/W						•	5915-N-2-563-XX
				29°	2700 K	990 lm	66 lm/W						•	5915-N-2-561-XX
					3000 K	990 lm	66 lm/W						•	5915-N-2-562-XX
OD-5922		 On/Off [10W]	50°	2700 K	990 lm	66 lm/W						•	5915-N-2-563-XX	
				3000 K	990 lm	66 lm/W						•	5915-N-2-561-XX	
			12°	4000 K	1180 lm	78 lm/W						•	5915-N-2-562-XX	
				2700 K	1180 lm	78 lm/W						•	5915-N-2-563-XX	
Mini ALPHA Round		OD-5921	 CC	12°	3000 K	990 lm	66 lm/W						•	5915-N-2-561-XX
					4000 K	990 lm	66 lm/W						•	5915-N-2-562-XX
				29°	2700 K	990 lm	66 lm/W						•	5915-N-2-563-XX
					3000 K	990 lm	66 lm/W						•	5915-N-2-561-XX
	OD-5922	 On/Off [10W]	50°	2700 K	990 lm	66 lm/W						•	5915-N-2-562-XX	
				3000 K	990 lm	66 lm/W						•	5915-N-2-563-XX	
			12°	4000 K	1180 lm	78 lm/W						•	5915-N-2-561-XX	
				2700 K	1180 lm	78 lm/W						•	5915-N-2-562-XX	
	Mini ALPHA Round	OD-5921	 CC	12°	3000 K	990 lm	66 lm/W						•	5915-N-2-563-XX
					4000 K	990 lm	66 lm/W						•	5915-N-2-561-XX
				29°	2700 K	990 lm	66 lm/W						•	5915-N-2-562-XX
					3000 K	990 lm	66 lm/W						•	5915-N-2-563-XX
OD-5922														

*Please contact sales team for special request.

Mini ALPHA Round

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller							Ordering Code
										CASAMBI	DMX	REMOTE	
OD-5922  On/Off [10W]	15 W	44°/13°	2700 K	1160 lm	77 lm/W	•							5922-H-3-528-XX
			3000 K	1160 lm	77 lm/W	•							5922-H-3-529-XX
			4000 K	1250 lm	83 lm/W	•							5922-H-3-530-XX
		13°/44°	2700 K	1160 lm	77 lm/W	•							5922-N-3-528-XX
			3000 K	1160 lm	77 lm/W	•							5922-N-3-529-XX
			4000 K	1250 lm	83 lm/W	•			•				5922-N-3-530-XX
OD-5923  Arm	10 W	12°	3000 K	880 lm	88 lm/W	•							5923-A-3-532-XX
		29°	3000 K	850 lm	85 lm/W	•							5923-B-3-532-XX
		50°	3000 K	710 lm	71 lm/W	•							5923-D-3-532-XX
	15 W	12°	3000 K	1200 lm	80 lm/W	•							5923-A-3-529-XX
		29°	3000 K	1180 lm	78 lm/W	•							5923-B-3-529-XX
		50°	3000 K	990 lm	66 lm/W	•							5923-D-3-529-XX
	15 W	50°	4000 K	1060 lm	70 lm/W	•			•				5923-D-3-530-XX
			3000 K	990 lm	66 lm/W								5923-D-5-529-XX
		44°/13°	3000 K	1160 lm	77 lm/W	•							5923-H-3-529-XX
			4000 K	1250 lm	83 lm/W	•							5923-H-3-530-XX
OD-5964  CC	14 W	14°	2700 K	910 lm	65 lm/W							•	5964-A-2-528-XX
			3000 K	910 lm	65 lm/W							•	5964-A-2-529-XX
			4000 K	970 lm	69 lm/W							•	5964-A-2-530-XX
		22°	2700 K	650 lm	46 lm/W							•	5964-B-2-528-XX
			3000 K	650 lm	46 lm/W							•	5964-B-2-529-XX
			4000 K	700 lm	50 lm/W							•	5964-B-2-530-XX
	14 W	31°	2700 K	370 lm	26 lm/W							•	5964-C-2-528-XX
			3000 K	370 lm	26 lm/W							•	5964-C-2-529-XX
			4000 K	390 lm	27 lm/W							•	5964-C-2-530-XX
		22°	2700 K	460 lm	46 lm/W	•							5965-B-3-531-XX
			3000 K	460 lm	46 lm/W	•							5965-B-3-532-XX
			4000 K	490 lm	49 lm/W	•							5965-B-3-533-XX
	10 W	31°	2700 K	460 lm	46 lm/W								5965-B-4-531-XX
			3000 K	460 lm	46 lm/W								5965-B-4-532-XX
			4000 K	490 lm	49 lm/W								5965-B-4-533-XX
		22°	2700 K	460 lm	46 lm/W								5965-B-4-531-XX
			3000 K	460 lm	46 lm/W								5965-B-4-532-XX
			4000 K	490 lm	49 lm/W								5965-B-4-533-XX
	10 W	31°	2700 K	260 lm	26 lm/W	•							5965-C-3-531-XX
			3000 K	260 lm	26 lm/W	•							5965-C-3-532-XX
			4000 K	270 lm	27 lm/W	•							5965-C-3-533-XX
		22°	2700 K	260 lm	26 lm/W								5965-C-4-531-XX
			3000 K	260 lm	26 lm/W								5965-C-4-532-XX
			4000 K	270 lm	27 lm/W								5965-C-4-533-XX
	14 W	14°	2700 K	910 lm	65 lm/W		•						5965-A-7-583-XX
			3000 K	910 lm	65 lm/W		•						5965-A-7-584-XX
			4000 K	970 lm	69 lm/W		•						5965-A-7-585-XX
		22°	2700 K	650 lm	46 lm/W		•						5965-B-7-583-XX
			3000 K	650 lm	46 lm/W		•						5965-B-7-584-XX
			4000 K	700 lm	50 lm/W		•						5965-B-7-585-XX
	16 W	14°	2700 K	370 lm	26 lm/W		•						5965-C-7-583-XX
			3000 K	370 lm	26 lm/W		•						5965-C-7-584-XX
			4000 K	390 lm	27 lm/W		•						5965-C-7-585-XX
		22°	2700 K	910 lm	56 lm/W	•							5965-A-3-528-XX
			3000 K	910 lm	56 lm/W	•							5965-A-3-529-XX
			4000 K	970 lm	60 lm/W	•							5965-A-3-530-XX
OD-5965  CVDA 	10 W	14°	2700 K	640 lm	64 lm/W	•							5965-A-3-531-XX
			3000 K	640 lm	64 lm/W	•							5965-A-3-532-XX
			4000 K	680 lm	68 lm/W	•							5965-A-3-533-XX
			2700 K	640 lm	64 lm/W			•					5965-A-4-531-XX
			3000 K	640 lm	64 lm/W			•					5965-A-4-532-XX
			4000 K	680 lm	68 lm/W			•					5965-A-4-533-XX
	10 W	22°	2700 K	460 lm	46 lm/W	•							5965-B-3-531-XX
			3000 K	460 lm	46 lm/W	•							5965-B-3-532-XX
			4000 K	490 lm	49 lm/W	•							5965-B-3-533-XX
			2700 K	460 lm	46 lm/W			•					5965-B-4-531-XX
			3000 K	460 lm	46 lm/W			•					5965-B-4-532-XX
			4000 K	490 lm	49 lm/W			•					5965-B-4-533-XX
	10 W	31°	2700 K	260 lm	26 lm/W	•							5965-C-3-531-XX
			3000 K	260 lm	26 lm/W	•							5965-C-3-532-XX
			4000 K	270 lm	27 lm/W	•							5965-C-3-533-XX
			2700 K	260 lm	26 lm/W			•					5965-C-4-531-XX
			3000 K	260 lm	26 lm/W			•					5965-C-4-532-XX
			4000 K	270 lm	27 lm/W			•					5965-C-4-533-XX
	14 W	14°	2700 K	910 lm	65 lm/W		•						5965-A-7-583-XX
			3000 K	910 lm	65 lm/W		•						5965-A-7-584-XX
			4000 K	970 lm	69 lm/W		•						5965-A-7-585-XX
		22°	2700 K	650 lm	46 lm/W		•						5965-B-7-583-XX
			3000 K	650 lm	46 lm/W		•						5965-B-7-584-XX
			4000 K	700 lm	50 lm/W		•						5965-B-7-585-XX
	16 W	14°	2700 K	370 lm	26 lm/W		•						5965-C-7-583-XX
			3000 K	370 lm	26 lm/W		•						5965-C-7-584-XX
			4000 K	390 lm	27 lm/W		•						5965-C-7-585-XX
		22°	2700 K	910 lm	56 lm/W	•							5965-A-3-528-XX
			3000 K	910 lm	56 lm/W	•							5965-A-3-529-XX
			4000 K	970 lm	60 lm/W	•							5965-A-3-530-XX
	16 W	22°	2700 K	650 lm	40 lm/W								5965-B-3-528-XX
			3000 K	650 lm	40 lm/W								5965-B-3-529-XX
			4000 K	700 lm	43 lm/W								5965-B-3-530-XX
			2700 K	650 lm	40 lm/W						•		5965-B-5-528-XX
			3000 K	650 lm	40 lm/W						•		5965-B-5-529-XX
			4000 K	700 lm	43 lm/W						•		5965-B-5-530-XX
	16 W	31°	2700 K	370 lm	23 lm/W	•							5965-C-3-528-XX
			3000 K	370 lm	23 lm/W	•							5965-C-3-529-XX
			4000 K	390 lm	24 lm/W	•							5965-C-3-530-XX
			2700 K	370 lm	23 lm/W						•		5965-C-5-528-XX
			3000 K	370 lm	23 lm/W						•		5965-C-5-529-XX
			4000 K	390 lm	24 lm/W						•		5965-C-5-530-XX

ALPHA

Mini ALPHA Round – ID

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller								Ordering Code	
										CASAMBI		REMOTE			
<div>OD-5972</div> <div></div>	7 W	12°	2700 K	690 lm	98 lm/W	•								5972-A-3-528-XX	
			3000 K	690 lm	98 lm/W	•							5972-A-3-529-XX		
			4000 K	740 lm	105 lm/W	•							5972-A-3-530-XX		
		29°	2700 K	670 lm	95 lm/W	•							5972-B-3-528-XX		
			3000 K	670 lm	95 lm/W	•							5972-B-3-529-XX		
			4000 K	720 lm	102 lm/W	•							5972-B-3-530-XX		
		50°	2700 K	550 lm	78 lm/W	•							5972-D-3-528-XX		
			3000 K	550 lm	78 lm/W	•							5972-D-3-529-XX		
			4000 K	600 lm	85 lm/W	•							5972-D-3-530-XX		
	7 W	44°/13°	2700 K	620 lm	88 lm/W	•							5972-H-3-528-XX		
			3000 K	620 lm	88 lm/W	•							5972-H-3-529-XX		
			4000 K	670 lm	95 lm/W	•							5972-H-3-530-XX		
		13°/44°	2700 K	620 lm	88 lm/W	•							5972-N-3-528-XX		
			3000 K	620 lm	88 lm/W	•							5972-N-3-529-XX		
			4000 K	670 lm	95 lm/W	•							5972-N-3-530-XX		
	10 W	12°	2700 K	950 lm	95 lm/W	•							5972-A-3-531-XX		
			3000 K	950 lm	95 lm/W	•							5972-A-3-532-XX		
			4000 K	1010 lm	101 lm/W	•							5972-A-3-533-XX		
		29°	2700 K	920 lm	92 lm/W	•							5972-B-3-531-XX		
			3000 K	920 lm	92 lm/W	•							5972-B-3-532-XX		
			4000 K	980 lm	98 lm/W	•							5972-B-3-533-XX		
		50°	2700 K	760 lm	76 lm/W	•							5972-D-3-531-XX		
			3000 K	760 lm	76 lm/W	•							5972-D-3-532-XX		
			4000 K	820 lm	82 lm/W	•							5972-D-3-533-XX		
10 W	44°/13°	2700 K	860 lm	86 lm/W	•							5972-H-3-531-XX			
		3000 K	860 lm	86 lm/W	•							5972-H-3-532-XX			
		4000 K	920 lm	92 lm/W	•							5972-H-3-533-XX			
	13°/44°	2700 K	860 lm	86 lm/W	•							5972-N-3-531-XX			
		3000 K	860 lm	86 lm/W	•							5972-N-3-532-XX			
		4000 K	920 lm	92 lm/W	•							5972-N-3-533-XX			
<div>OD-5973</div> <div></div>	5 W	7°	3000 K	260 lm	52 lm/W	•							5973-4-3-227-XX		
	6 W	7°	3000 K	350 lm	58 lm/W	•								5973-4-3-293-XX	
<div>OD-5943</div> <div></div> <div>CC</div> <div>OD-5945</div> <div></div> <div></div> <div>Gear</div>	13 W	67°	4000 K	1200 lm	92 lm/W							•	5943-D-2-545-XX		
		30°	3000 K	1210 lm	86 lm/W								•	5943-C-2-544-XX	
	14 W	67°	3000 K	1170 lm	83 lm/W								•	5943-D-2-544-XX	
			2700 K	1170 lm	83 lm/W								•	5943-D-2-676-XX	
		82°/22°	3000 K	930 lm	66 lm/W								•	5943-H-2-544-XX	
			3000 K	880 lm	88 lm/W	•								5945-A-3-546-XX	
	10 W	15°	4000 K	930 lm	93 lm/W	•								5945-A-3-547-XX	
			3000 K	840 lm	84 lm/W	•								5945-C-3-546-XX	
		30°	3000 K	810 lm	81 lm/W	•								5945-D-3-546-XX	
			4000 K	860 lm	86 lm/W	•								5945-D-3-547-XX	
		82°/22°	3000 K	650 lm	65 lm/W	•								5945-H-3-546-XX	
			4000 K	680 lm	68 lm/W	•								5945-H-3-547-XX	
		22°/82°	3000 K	650 lm	65 lm/W	•								5945-N-3-546-XX	
			4000 K	680 lm	68 lm/W	•								5945-N-3-547-XX	
		15 W	15°	3000 K	1270 lm	84 lm/W				•					5945-A-5-544-XX
				3000 K	1210 lm	80 lm/W	•								5945-C-3-544-XX
	67°		3000 K	1170 lm	78 lm/W	•				•				5945-D-3-544-XX	
			3000 K	1170 lm	78 lm/W	•				•				5945-D-5-544-XX	
	2700 K		1170 lm	78 lm/W	•								5945-D-3-676-XX		
			3000 K	930 lm	62 lm/W	•								5945-H-3-544-XX	
	82°/22°		4000 K	950 lm	63 lm/W	•								5945-H-3-545-XX	
			2700 K	930 lm	62 lm/W	•								5945-H-3-676-XX	
	<div>OD-5960</div> <div></div>	8 W	15°	2700 K	640 lm	80 lm/W	•							5960-A-3-676-XX	
3000 K				640 lm	80 lm/W	•								5960-A-3-544-XX	
4000 K				690 lm	86 lm/W	•								5960-A-3-545-XX	
30°			2700 K	620 lm	77 lm/W	•								5960-C-3-676-XX	
			3000 K	620 lm	77 lm/W	•								5960-C-3-544-XX	
			4000 K	660 lm	82 lm/W	•								5960-C-3-545-XX	
67°			2700 K	590 lm	73 lm/W	•								5960-D-3-676-XX	
			3000 K	590 lm	73 lm/W	•								5960-D-3-544-XX	
			4000 K	630 lm	78 lm/W	•								5960-D-3-545-XX	
95°			2700 K	530 lm	66 lm/W	•								5960-E-3-676-XX	
			3000 K	530 lm	66 lm/W	•								5960-E-3-544-XX	
			4000 K	570 lm	71 lm/W	•								5960-E-3-545-XX	
8 W		82°/22°	2700 K	470 lm	58 lm/W	•								5960-H-3-676-XX	
			3000 K	470 lm	58 lm/W	•								5960-H-3-544-XX	
			4000 K	500 lm	62 lm/W	•								5960-H-3-545-XX	
		22°/82°	2700 K	470 lm	58 lm/W	•								5960-N-3-676-XX	
			3000 K	470 lm	58 lm/W	•								5960-N-3-544-XX	
			4000 K	500 lm	62 lm/W	•								5960-N-3-545-XX	

Mini ALPHA Square – ID

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller							Ordering Code
										CASAMBI		REMOTE	
OD-5961 	8 W	15°	2700 K	640 lm	80 lm/W	•							5961-A-3-676-XX
			3000 K	640 lm	80 lm/W	•							5961-A-3-544-XX
			4000 K	690 lm	86 lm/W	•							5961-A-3-545-XX
		30°	2700 K	620 lm	77 lm/W	•							5961-C-3-676-XX
			3000 K	620 lm	77 lm/W	•							5961-C-3-544-XX
			4000 K	660 lm	82 lm/W	•							5961-C-3-545-XX
	8 W	67°	2700 K	590 lm	73 lm/W	•							5961-D-3-676-XX
			3000 K	590 lm	73 lm/W	•							5961-D-3-544-XX
			4000 K	630 lm	78 lm/W	•							5961-D-3-545-XX
		95°	2700 K	530 lm	66 lm/W	•							5961-E-3-676-XX
			3000 K	530 lm	66 lm/W	•							5961-E-3-544-XX
			4000 K	570 lm	71 lm/W	•							5961-E-3-545-XX
OD-5924  CC  CC 23W / 25W	23 W	21°	2700 K	2670 lm	116 lm/W							•	5924-B-2-505-XX
			3000 K	2790 lm	121 lm/W							•	5924-B-2-902-XX
			4000 K	2860 lm	124 lm/W							•	5924-B-2-905-XX
		32°	2700 K	2560 lm	111 lm/W							•	5924-C-2-505-XX
			3000 K	2680 lm	116 lm/W							•	5924-C-2-902-XX
			4000 K	2750 lm	119 lm/W							•	5924-C-2-905-XX
	25 W	52°	2700 K	2250 lm	97 lm/W							•	5924-D-2-505-XX
			3000 K	2350 lm	102 lm/W							•	5924-D-2-902-XX
			4000 K	2410 lm	104 lm/W							•	5924-D-2-905-XX
	25 W	15°	2700 K	2450 lm	98 lm/W							•	5924-A-2-710-XX
			3000 K	2530 lm	101 lm/W							•	5924-A-2-719-XX
			4000 K	2670 lm	106 lm/W							•	5924-A-2-720-XX
	26 W	12°	3000 K	2310 lm	88 lm/W							•	5924-A-2-535-XX
			4000 K	2250 lm	86 lm/W							•	5924-A-2-536-XX
		27°	3000 K	2090 lm	80 lm/W							•	5924-B-2-535-XX
			4000 K	2030 lm	78 lm/W							•	5924-B-2-536-XX
		42°	3000 K	1900 lm	73 lm/W							•	5924-D-2-535-XX
			4000 K	1850 lm	71 lm/W							•	5924-D-2-536-XX
OD-5925  Remote  DALI/ 1-10V/ On-Off/ CASAMBI	18 W	21°	2700 K	1940 lm	107 lm/W	•							5925-B-3-506-XX
			3000 K	2030 lm	112 lm/W	•							5925-B-3-887-XX
			4000 K	2080 lm	115 lm/W	•							5925-B-3-891-XX
			2700 K	1940 lm	107 lm/W			•					5925-B-4-506-XX
			3000 K	2030 lm	112 lm/W			•					5925-B-4-887-XX
			4000 K	2080 lm	115 lm/W			•					5925-B-4-891-XX
			2700 K	1940 lm	107 lm/W				•				5925-B-5-506-XX
			3000 K	2030 lm	112 lm/W				•				5925-B-5-887-XX
			4000 K	2080 lm	115 lm/W				•				5925-B-5-891-XX
			2700 K	1940 lm	107 lm/W					•			5925-B-A-506-XX
			3000 K	2030 lm	112 lm/W					•			5925-B-A-887-XX
			4000 K	2080 lm	115 lm/W					•			5925-B-A-891-XX
	18 W	32°	2700 K	1860 lm	103 lm/W	•							5925-C-3-506-XX
			3000 K	1950 lm	108 lm/W	•							5925-C-3-887-XX
			4000 K	2000 lm	111 lm/W	•							5925-C-3-891-XX
			2700 K	1860 lm	103 lm/W			•					5925-C-4-506-XX
			3000 K	1950 lm	108 lm/W			•					5925-C-4-887-XX
			4000 K	2000 lm	111 lm/W			•					5925-C-4-891-XX
			2700 K	1860 lm	103 lm/W				•				5925-C-5-506-XX
			3000 K	1950 lm	108 lm/W				•				5925-C-5-887-XX
			4000 K	2000 lm	111 lm/W				•				5925-C-5-891-XX
			2700 K	1860 lm	103 lm/W					•			5925-C-A-506-XX
			3000 K	1950 lm	108 lm/W					•			5925-C-A-887-XX
			4000 K	2000 lm	111 lm/W					•			5925-C-A-891-XX
18 W	52°	2700 K	1630 lm	90 lm/W	•								5925-D-3-506-XX
			3000 K	1710 lm	95 lm/W	•							5925-D-3-887-XX
			4000 K	1750 lm	97 lm/W	•							5925-D-3-891-XX
			2700 K	1630 lm	90 lm/W			•					5925-D-4-506-XX
			3000 K	1710 lm	95 lm/W			•					5925-D-4-887-XX
			4000 K	1750 lm	97 lm/W			•					5925-D-4-891-XX
		2700 K	1630 lm	90 lm/W					•				5925-D-5-506-XX
			3000 K	1710 lm	95 lm/W				•				5925-D-5-887-XX
			4000 K	1750 lm	97 lm/W				•				5925-D-5-891-XX
			2700 K	1630 lm	90 lm/W					•			5925-D-A-506-XX
			3000 K	1710 lm	95 lm/W					•			5925-D-A-887-XX
			4000 K	1750 lm	97 lm/W					•			5925-D-A-891-XX

Medium ALPHA Round

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller							Ordering Code
										CASAMBI		REMOTE	
OD-5925													
	19 W	12°	3000 K	1700 lm	89 lm/W	•							5925-A-3-538-XX
			2700 K	1820 lm	95 lm/W	•							5925-A-3-767-XX
			3000 K	1880 lm	98 lm/W	•							5925-A-3-768-XX
			4000 K	1980 lm	104 lm/W	•							5925-A-3-769-XX
	19 W	15°	2700 K	1820 lm	95 lm/W			•					5925-A-4-767-XX
			3000 K	1880 lm	98 lm/W			•					5925-A-4-768-XX
			4000 K	1980 lm	104 lm/W			•					5925-A-4-769-XX
			2700 K	1820 lm	95 lm/W				•				5925-A-5-767-XX
DALI/ 1-10V/ On-Off/ CASAMBI			3000 K	1880 lm	98 lm/W				•				5925-A-5-768-XX
			4000 K	1980 lm	104 lm/W				•				5925-A-5-769-XX
			2700 K	1820 lm	95 lm/W					•			5925-A-A-767-XX
			3000 K	1880 lm	98 lm/W					•			5925-A-A-768-XX
	19 W	27°	4000 K	1540 lm	81 lm/W	•							5925-B-3-538-XX
			4000 K	1640 lm	86 lm/W	•							5925-B-3-539-XX
		42°	2700 K	1390 lm	73 lm/W	•							5925-D-3-537-XX
			3000 K	1390 lm	73 lm/W	•							5925-D-3-538-XX
		46°/16° 16°/46°	4000 K	1490 lm	78 lm/W	•							5925-D-3-539-XX
			3000 K	1580 lm	83 lm/W	•							5925-H-3-538-XX
			3000 K	1580 lm	83 lm/W	•							5925-N-3-538-XX
			RGBW	1590 lm	66 lm/W							•	5925-B-2-686-XX
	24 W	27°	RGBW	1440 lm	60 lm/W							•	5925-D-2-686-XX
			RGBW	1630 lm	67 lm/W							•	5925-H-2-686-XX
			RGBW	1630 lm	67 lm/W							•	5925-N-2-686-XX
			RGBW	1630 lm	67 lm/W							•	5925-B-6-686-XX
			RGBW	1630 lm	67 lm/W								5925-B-3-505-XX
			3000 K	2790 lm	111 lm/W	•							5925-B-3-902-XX
			4000 K	2860 lm	114 lm/W	•							5925-B-3-905-XX
			2700 K	2670 lm	106 lm/W			•					5925-B-4-505-XX
			3000 K	2790 lm	111 lm/W			•					5925-B-4-902-XX
			4000 K	2860 lm	114 lm/W			•					5925-B-4-905-XX
			2700 K	2670 lm	106 lm/W				•				5925-B-5-505-XX
			3000 K	2790 lm	111 lm/W				•				5925-B-5-902-XX
			4000 K	2860 lm	114 lm/W				•				5925-B-5-905-XX
			2700 K	2670 lm	106 lm/W					•			5925-B-A-505-XX
			3000 K	2790 lm	111 lm/W					•			5925-B-A-902-XX
			4000 K	2860 lm	114 lm/W					•			5925-B-A-905-XX
			2700 K	2560 lm	102 lm/W	•							5925-C-3-505-XX
			3000 K	2680 lm	107 lm/W	•							5925-C-3-902-XX
			4000 K	2750 lm	110 lm/W	•							5925-C-3-905-XX
			2700 K	2560 lm	102 lm/W			•					5925-C-4-505-XX
			3000 K	2680 lm	107 lm/W			•					5925-C-4-902-XX
			4000 K	2750 lm	110 lm/W			•					5925-C-4-905-XX
			2700 K	2560 lm	102 lm/W				•				5925-C-5-505-XX
			3000 K	2680 lm	107 lm/W				•				5925-C-5-902-XX
			4000 K	2750 lm	110 lm/W				•				5925-C-5-905-XX
			2700 K	2560 lm	102 lm/W					•			5925-C-A-505-XX
			3000 K	2680 lm	107 lm/W					•			5925-C-A-902-XX
			4000 K	2750 lm	110 lm/W					•			5925-C-A-905-XX
			2700 K	2250 lm	90 lm/W	•							5925-D-3-505-XX
			3000 K	2350 lm	94 lm/W	•							5925-D-3-902-XX
			4000 K	2410 lm	96 lm/W	•							5925-D-3-905-XX
			2700 K	2250 lm	90 lm/W			•					5925-D-4-505-XX
			3000 K	2350 lm	94 lm/W			•					5925-D-4-902-XX
			4000 K	2410 lm	96 lm/W			•					5925-D-4-905-XX
			2700 K	2250 lm	90 lm/W				•				5925-D-5-505-XX
			3000 K	2350 lm	94 lm/W				•				5925-D-5-902-XX
			4000 K	2410 lm	96 lm/W				•				5925-D-5-905-XX
			2700 K	2250 lm	90 lm/W					•			5925-D-A-505-XX
			3000 K	2350 lm	94 lm/W					•			5925-D-A-902-XX
			4000 K	2410 lm	96 lm/W					•			5925-D-A-905-XX
			2700 K	2450 lm	94 lm/W	•							5925-A-3-710-XX
			3000 K	2530 lm	97 lm/W	•							5925-A-3-719-XX
			4000 K	2670 lm	102 lm/W	•							5925-A-3-720-XX
			2700 K	2450 lm	94 lm/W			•					5925-A-4-710-XX
			3000 K	2530 lm	97 lm/W			•					5925-A-4-719-XX
			4000 K	2670 lm	102 lm/W			•					5925-A-4-720-XX
			2700 K	2450 lm	94 lm/W				•				5925-A-5-710-XX
			3000 K	2530 lm	97 lm/W				•				5925-A-5-719-XX
			4000 K	2670 lm	102 lm/W				•				5925-A-5-720-XX
			2700 K	2450 lm	94 lm/W					•			5925-A-A-710-XX
			3000 K	2530 lm	97 lm/W					•			5925-A-A-719-XX
			4000 K	2670 lm	102 lm/W					•			5925-A-A-720-XX
			3000 K	2310 lm	85 lm/W	•							5925-A-3-535-XX
			4000 K	2460 lm	91 lm/W	•							5925-A-3-536-XX
			3000 K	2310 lm	85 lm/W				•				5925-A-5-535-XX
			3000 K	2090 lm	77 lm/W	•							5925-B-3-535-XX
			3000 K	2090 lm	77 lm/W			•					5925-B-4-535-XX
			RGBW	1590 lm	58 lm/W						•		5925-B-6-686-XX

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller							Ordering Code
										CASAMBI		REMOTE	
OD-5925  Remote  DALI/ 1-10V/ On-Off/ CASAMBI   DMX	27 W	42°	3000 K	1900 lm	70 lm/W	•							5925-D-3-535-XX
			4000 K	2020 lm	74 lm/W	•							5925-D-3-536-XX
			2700 K	1900 lm	70 lm/W			•					5925-D-4-534-XX
			3000 K	1900 lm	70 lm/W			•					5925-D-4-535-XX
			2700 K	1900 lm	70 lm/W				•				5925-D-5-534-XX
			3000 K	1900 lm	70 lm/W				•				5925-D-5-535-XX
	27 W	46°/16°	RGBW	1440 lm	53 lm/W						•		5925-D-6-686-XX
			2700 K	2150 lm	79 lm/W	•							5925-H-3-534-XX
			3000 K	2150 lm	79 lm/W	•							5925-H-3-535-XX
		16°/46°	RGBW	1630 lm	60 lm/W						•		5925-H-6-686-XX
			3000 K	2150 lm	79 lm/W	•							5925-N-3-535-XX
			RGBW	1630 lm	60 lm/W						•		5925-N-6-686-XX
	35 W	12°	2700 K	2880 lm	82 lm/W	•							5925-A-3-308-XX
			3000 K	2880 lm	82 lm/W	•							5925-A-3-309-XX
			4000 K	3080 lm	88 lm/W	•							5925-A-3-310-XX
			2700 K	2880 lm	82 lm/W			•					5925-A-4-308-XX
			3000 K	2880 lm	82 lm/W			•					5925-A-4-309-XX
			4000 K	3080 lm	88 lm/W			•					5925-A-4-310-XX
			2700 K	2880 lm	82 lm/W				•				5925-A-5-308-XX
			3000 K	2880 lm	82 lm/W				•				5925-A-5-309-XX
			4000 K	3080 lm	88 lm/W				•				5925-A-5-310-XX
			2700 K	2610 lm	74 lm/W	•							5925-B-3-308-XX
			3000 K	2610 lm	74 lm/W	•							5925-B-3-309-XX
			4000 K	2790 lm	79 lm/W	•							5925-B-3-310-XX
	35 W	27°	2700 K	2610 lm	74 lm/W			•					5925-B-4-308-XX
			3000 K	2610 lm	74 lm/W			•					5925-B-4-309-XX
			4000 K	2790 lm	79 lm/W			•					5925-B-4-310-XX
			2700 K	2610 lm	74 lm/W				•				5925-B-5-308-XX
			3000 K	2610 lm	74 lm/W				•				5925-B-5-309-XX
			4000 K	2790 lm	79 lm/W				•				5925-B-5-310-XX
		42°	2700 K	2380 lm	68 lm/W	•							5925-D-3-308-XX
			3000 K	2380 lm	68 lm/W	•							5925-D-3-309-XX
			4000 K	2540 lm	72 lm/W	•							5925-D-3-310-XX
			2700 K	2380 lm	68 lm/W			•					5925-D-4-308-XX
			3000 K	2380 lm	68 lm/W			•					5925-D-4-309-XX
			4000 K	2540 lm	72 lm/W			•					5925-D-4-310-XX
	35 W	46°/16°	2700 K	2380 lm	68 lm/W				•				5925-D-5-308-XX
			3000 K	2380 lm	68 lm/W				•				5925-D-5-309-XX
			4000 K	2540 lm	72 lm/W				•				5925-D-5-310-XX
			2700 K	2690 lm	76 lm/W	•							5925-H-3-308-XX
			3000 K	2690 lm	76 lm/W	•							5925-H-3-309-XX
			4000 K	2880 lm	82 lm/W	•							5925-H-3-310-XX
			2700 K	2690 lm	76 lm/W			•					5925-H-4-308-XX
			3000 K	2690 lm	76 lm/W			•					5925-H-4-309-XX
			4000 K	2880 lm	82 lm/W			•					5925-H-4-310-XX
			2700 K	2690 lm	76 lm/W				•				5925-H-5-308-XX
			3000 K	2690 lm	76 lm/W				•				5925-H-5-309-XX
			4000 K	2880 lm	82 lm/W				•				5925-H-5-310-XX
	35 W	16°/46°	2700 K	2690 lm	76 lm/W	•							5925-N-3-308-XX
			3000 K	2690 lm	76 lm/W	•							5925-N-3-309-XX
			4000 K	2880 lm	82 lm/W	•							5925-N-3-310-XX
			2700 K	2690 lm	76 lm/W			•					5925-N-4-308-XX
			3000 K	2690 lm	76 lm/W			•					5925-N-4-309-XX
			4000 K	2880 lm	82 lm/W			•					5925-N-4-310-XX
			2700 K	2690 lm	76 lm/W				•				5925-N-5-308-XX
			3000 K	2690 lm	76 lm/W				•				5925-N-5-309-XX
			4000 K	2880 lm	82 lm/W				•				5925-N-5-310-XX



Medium ALPHA Round – ID

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller							Ordering Code
										CASAMBI		REMOTE	
OD-5962													
	19 W	27°	2700 K	1540 lm	81 lm/W				•				5962-B-5-537-XX
			3000 K	1540 lm	81 lm/W				•				5962-B-5-538-XX
			4000 K	1650 lm	86 lm/W				•				5962-B-5-539-XX
			2700 K	1540 lm	81 lm/W					•			5962-B-A-537-XX
			3000 K	1540 lm	81 lm/W					•			5962-B-A-538-XX
			4000 K	1650 lm	86 lm/W					•			5962-B-A-539-XX
	19 W	42°	2700 K	1400 lm	73 lm/W	•							5962-D-3-537-XX
			3000 K	1400 lm	73 lm/W	•							5962-D-3-538-XX
			4000 K	1500 lm	78 lm/W	•							5962-D-3-539-XX
			2700 K	1400 lm	73 lm/W			•					5962-D-4-537-XX
			3000 K	1400 lm	73 lm/W			•					5962-D-4-538-XX
			4000 K	1500 lm	78 lm/W			•					5962-D-4-539-XX
2700 K			1400 lm	73 lm/W				•				5962-D-5-537-XX	
3000 K			1400 lm	73 lm/W				•				5962-D-5-538-XX	
4000 K			1500 lm	78 lm/W				•				5962-D-5-539-XX	
2700 K			1400 lm	73 lm/W					•			5962-D-A-537-XX	
3000 K			1400 lm	73 lm/W					•			5962-D-A-538-XX	
4000 K			1500 lm	78 lm/W					•			5962-D-A-539-XX	
	19 W	7°	3000 K	1030 lm	54 lm/W	•							5962-4-3-286-XX
			3000 K	1030 lm	54 lm/W			•					5962-4-4-286-XX
			3000 K	1030 lm	54 lm/W				•				5962-4-5-286-XX
			3000 K	1030 lm	54 lm/W					•			5962-4-A-286-XX
	19 W	46°/16°	2700 K	1580 lm	83 lm/W	•							5962-H-3-537-XX
			3000 K	1580 lm	83 lm/W	•							5962-H-3-538-XX
			4000 K	1690 lm	88 lm/W	•							5962-H-3-539-XX
			2700 K	1580 lm	83 lm/W			•					5962-H-4-537-XX
			3000 K	1580 lm	83 lm/W			•					5962-H-4-538-XX
			4000 K	1690 lm	88 lm/W			•					5962-H-4-539-XX
			2700 K	1580 lm	83 lm/W				•				5962-H-5-537-XX
			3000 K	1580 lm	83 lm/W				•				5962-H-5-538-XX
4000 K			1690 lm	88 lm/W				•				5962-H-5-539-XX	
2700 K			1580 lm	83 lm/W					•			5962-H-A-537-XX	
3000 K			1580 lm	83 lm/W					•			5962-H-A-538-XX	
4000 K			1690 lm	88 lm/W					•			5962-H-A-539-XX	
19 W	25°/60°	2700 K	1580 lm	83 lm/W	•							5962-N-3-537-XX	
		3000 K	1580 lm	83 lm/W	•							5962-N-3-538-XX	
		4000 K	1690 lm	88 lm/W	•							5962-N-3-539-XX	
		2700 K	1580 lm	83 lm/W			•					5962-N-4-537-XX	
		3000 K	1580 lm	83 lm/W			•					5962-N-4-538-XX	
		4000 K	1690 lm	88 lm/W			•					5962-N-4-539-XX	
		2700 K	1580 lm	83 lm/W				•				5962-N-5-537-XX	
		3000 K	1580 lm	83 lm/W				•				5962-N-5-538-XX	
		4000 K	1690 lm	88 lm/W				•				5962-N-5-539-XX	
		2700 K	1580 lm	83 lm/W					•			5962-N-A-537-XX	
		3000 K	1580 lm	83 lm/W					•			5962-N-A-538-XX	
		4000 K	1690 lm	88 lm/W					•			5962-N-A-539-XX	
28 W	12°	2700 K	2310 lm	82 lm/W	•							5962-A-3-534-XX	
		3000 K	2310 lm	82 lm/W	•							5962-A-3-535-XX	
		4000 K	2440 lm	87 lm/W	•							5962-A-3-536-XX	
		2700 K	2310 lm	82 lm/W			•					5962-A-4-534-XX	
		3000 K	2310 lm	82 lm/W			•					5962-A-4-535-XX	
		4000 K	2440 lm	87 lm/W			•					5962-A-4-536-XX	
		2700 K	2310 lm	82 lm/W				•				5962-A-5-534-XX	
		3000 K	2310 lm	82 lm/W				•				5962-A-5-535-XX	
		4000 K	2440 lm	87 lm/W				•				5962-A-5-536-XX	
		2700 K	2310 lm	82 lm/W					•			5962-A-A-534-XX	
		3000 K	2310 lm	82 lm/W					•			5962-A-A-535-XX	
		4000 K	2440 lm	87 lm/W					•			5962-A-A-536-XX	
28 W	27°	2700 K	2090 lm	74 lm/W	•							5962-B-3-534-XX	
		3000 K	2090 lm	74 lm/W	•							5962-B-3-535-XX	
		4000 K	2210 lm	78 lm/W	•							5962-B-3-536-XX	
		2700 K	2090 lm	74 lm/W			•					5962-B-4-534-XX	
		3000 K	2090 lm	74 lm/W			•					5962-B-4-535-XX	
		4000 K	2210 lm	78 lm/W			•					5962-B-4-536-XX	
		2700 K	2090 lm	74 lm/W				•				5962-B-5-534-XX	
		3000 K	2090 lm	74 lm/W				•				5962-B-5-535-XX	
		4000 K	2210 lm	78 lm/W				•				5962-B-5-536-XX	
		2700 K	2090 lm	74 lm/W					•			5962-B-A-534-XX	
		3000 K	2090 lm	74 lm/W					•			5962-B-A-535-XX	
		4000 K	2210 lm	78 lm/W					•			5962-B-A-536-XX	
28 W	42°	2700 K	1900 lm	67 lm/W	•							5962-D-3-534-XX	
		3000 K	1900 lm	67 lm/W	•							5962-D-3-535-XX	
		4000 K	2010 lm	71 lm/W	•							5962-D-3-536-XX	
		2700 K	1900 lm	67 lm/W			•					5962-D-4-534-XX	
		3000 K	1900 lm	67 lm/W			•					5962-D-4-535-XX	
		4000 K	2010 lm	71 lm/W			•					5962-D-4-536-XX	
		2700 K	1900 lm	67 lm/W				•				5962-D-5-534-XX	
		3000 K	1900 lm	67 lm/W				•				5962-D-5-535-XX	
		4000 K	2010 lm	71 lm/W				•				5962-D-5-536-XX	
		2700 K	1900 lm	67 lm/W					•			5962-D-A-534-XX	
		3000 K	1900 lm	67 lm/W					•			5962-D-A-535-XX	
		4000 K	2010 lm	71 lm/W					•			5962-D-A-536-XX	
28 W	46°/16°	2700 K	2150 lm	76 lm/W	•							5962-H-3-534-XX	

Medium ALPHA Round – ID

Medium ALPHA Round Snoot

Medium ALPHA Square

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller							Ordering Code	
										CASAMBI		REMOTE		
OD-5962		28 W	46°/16°	3000 K	2150 lm	76 lm/W	•							5962-H-3-535-XX
4000 K				2280 lm	81 lm/W	•							5962-H-3-536-XX	
2700 K				2150 lm	76 lm/W				•				5962-H-4-534-XX	
3000 K				2150 lm	76 lm/W				•				5962-H-4-535-XX	
4000 K				2280 lm	81 lm/W				•				5962-H-4-536-XX	
2700 K				2150 lm	76 lm/W					•			5962-H-5-534-XX	
3000 K				2150 lm	76 lm/W					•			5962-H-5-535-XX	
4000 K				2280 lm	81 lm/W					•			5962-H-5-536-XX	
2700 K				2150 lm	76 lm/W						•		5962-H-A-534-XX	
3000 K		2150 lm	76 lm/W						•		5962-H-A-535-XX			
4000 K		2280 lm	81 lm/W						•		5962-H-A-536-XX			
28 W		25°/60°	2700 K	2150 lm	76 lm/W	•							5962-N-3-534-XX	
			3000 K	2150 lm	76 lm/W	•							5962-N-3-535-XX	
			4000 K	2280 lm	81 lm/W	•							5962-N-3-536-XX	
			2700 K	2150 lm	76 lm/W				•				5962-N-4-534-XX	
	3000 K		2150 lm	76 lm/W				•				5962-N-4-535-XX		
	4000 K		2280 lm	81 lm/W				•				5962-N-4-536-XX		
	2700 K		2150 lm	76 lm/W					•			5962-N-5-534-XX		
	3000 K		2150 lm	76 lm/W					•			5962-N-5-535-XX		
	4000 K		2280 lm	81 lm/W					•			5962-N-5-536-XX		
		2700 K	2150 lm	76 lm/W					•			5962-N-A-534-XX		
	3000 K	2150 lm	76 lm/W					•			5962-N-A-535-XX			
	4000 K	2280 lm	81 lm/W					•			5962-N-A-536-XX			
OD-5967	 CC  Gear	26 W	13°	2700 K	1540 lm	59 lm/W						•	5967-A-2-534-XX	
3000 K				1540 lm	59 lm/W						•	5967-A-2-535-XX		
4000 K				1630 lm	62 lm/W						•	5967-A-2-536-XX		
26 W		20°	2700 K	1110 lm	42 lm/W							•	5967-B-2-534-XX	
			3000 K	1110 lm	42 lm/W							•	5967-B-2-535-XX	
			4000 K	1170 lm	45 lm/W							•	5967-B-2-536-XX	
26 W		28°	2700 K	770 lm	29 lm/W								•	5967-6-2-534-XX
			3000 K	770 lm	29 lm/W								•	5967-6-2-535-XX
			4000 K	810 lm	31 lm/W								•	5967-6-2-536-XX
19 W		13°	2700 K	1140 lm	60 lm/W	•								5968-A-3-537-XX
			3000 K	1140 lm	60 lm/W	•								5968-A-3-538-XX
			4000 K	1210 lm	63 lm/W	•								5968-A-3-539-XX
19 W		20°	2700 K	820 lm	43 lm/W	•								5968-B-3-537-XX
			3000 K	820 lm	43 lm/W	•								5968-B-3-538-XX
			4000 K	870 lm	45 lm/W	•								5968-B-3-539-XX
19 W		28°	2700 K	570 lm	30 lm/W	•								5968-6-3-537-XX
			3000 K	570 lm	30 lm/W	•								5968-6-3-538-XX
			4000 K	600 lm	31 lm/W	•								5968-6-3-539-XX
27 W		13°	2700 K	1540 lm	57 lm/W	•								5968-A-3-534-XX
			3000 K	1540 lm	57 lm/W	•								5968-A-3-535-XX
			4000 K	1630 lm	60 lm/W	•								5968-A-3-536-XX
			2700 K	1540 lm	57 lm/W				•					5968-A-4-534-XX
			3000 K	1540 lm	57 lm/W				•					5968-A-4-535-XX
			4000 K	1630 lm	60 lm/W				•					5968-A-4-536-XX
			2700 K	1540 lm	57 lm/W					•				5968-A-5-534-XX
			3000 K	1540 lm	57 lm/W					•				5968-A-5-535-XX
			4000 K	1630 lm	60 lm/W					•				5968-A-5-536-XX
27 W		20°	2700 K	1110 lm	41 lm/W	•								5968-B-3-534-XX
			3000 K	1110 lm	41 lm/W	•								5968-B-3-535-XX
			4000 K	1170 lm	43 lm/W	•								5968-B-3-536-XX
			2700 K	1110 lm	41 lm/W				•					5968-B-4-534-XX
			3000 K	1110 lm	41 lm/W				•					5968-B-4-535-XX
			4000 K	1170 lm	43 lm/W				•					5968-B-4-536-XX
			2700 K	1110 lm	41 lm/W					•				5968-B-5-534-XX
			3000 K	1110 lm	41 lm/W					•				5968-B-5-535-XX
			4000 K	1170 lm	43 lm/W					•				5968-B-5-536-XX
27 W	28°	2700 K	770 lm	28 lm/W	•								5968-6-3-534-XX	
		3000 K	770 lm	28 lm/W	•								5968-6-3-535-XX	
		4000 K	810 lm	30 lm/W	•								5968-6-3-536-XX	
		2700 K	770 lm	28 lm/W				•					5968-6-4-534-XX	
		3000 K	770 lm	28 lm/W				•					5968-6-4-535-XX	
		4000 K	810 lm	30 lm/W				•					5968-6-4-536-XX	
		2700 K	770 lm	28 lm/W					•				5968-6-5-534-XX	
		3000 K	770 lm	28 lm/W					•				5968-6-5-535-XX	
		4000 K	810 lm	30 lm/W					•				5968-6-5-536-XX	
OD-5944		19 W	12°	3000 K	1800 lm	94 lm/W	•						5944-A-3-897-XX	
4000 K				1930 lm	101 lm/W	•							5944-A-3-898-XX	
3000 K				1800 lm	94 lm/W				•				5944-A-5-897-XX	
3000 K				1800 lm	94 lm/W				•				5944-A-4-897-XX	
19 W		25°	3000 K	1660 lm	87 lm/W	•							5944-B-3-897-XX	
			4000 K	1780 lm	93 lm/W	•							5944-B-3-898-XX	
			3000 K	1660 lm	87 lm/W					•			5944-B-5-897-XX	
19 W		46°	3000 K	1510 lm	79 lm/W	•							5944-C-3-897-XX	
			4000 K	1620 lm	85 lm/W	•							5944-C-3-898-XX	
			3000 K	1510 lm	79 lm/W				•				5944-C-4-897-XX	
19 W		45°/14°	3000 K	1630 lm	85 lm/W	•							5944-H-3-897-XX	
			4000 K	1740 lm	91 lm/W	•							5944-H-3-898-XX	
			3000 K	1630 lm	85 lm/W					•			5944-N-5-897-XX	
			3000 K	1630 lm	85 lm/W									



SONIC is a huge family of spotlight/floodlight with COB LED light source. The family offers ground/wall mount fixing, pole clamp and wall clamp array, indirect pole and wall light.

The wide ranges of accessories like glare shield unit, tree strap, earth spike and anchorage bolt kit make **SONIC** customizable for most application. Available in three sizes with a choice of six colors. **SONIC** is fitted with COB LED with high CRI in 2700K, 3000K or 4000K color temperature with 3 SDCM.

The front glass cover is flush to the luminaire housing thus dust and water are not accumulated. High specular reflectors are used in this luminaire family to achieve an outstanding light output ratio.

Aiming can be done through graduated scale by tool. For ease of installation and improved thermal performance the control gear compartment is housed separately to the light engine. **SONIC** is an ideal choice to accentuate sculptures, walls, building facades, bushes and trees.



www.unilamp.co.th/en/p/sonic

Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum, extruded aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module.
- On-Off / 1-10V / DALI control gear.
- Installation must be carried out according to the enclosed product manual.

Available Color




****Custom colors are available on request.**

Mini SONIC – Gear
+ Accessory kit for Pole Clamp Solution




Mega SONIC – Gear
+ Accessory kit for Pole Clamp Solution

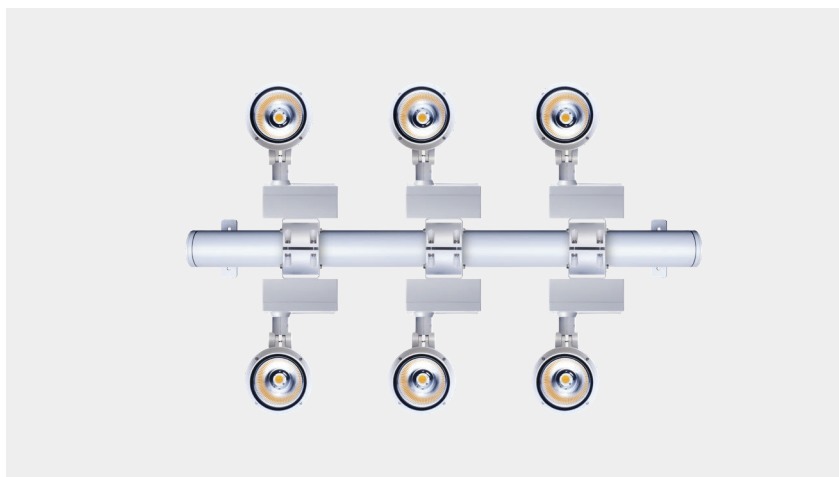

Medium SONIC – Gear
+ Accessory kit for Pole Clamp Solution




Mega SONIC – Gear
+ Accessory kit for Pole Clamp Solution

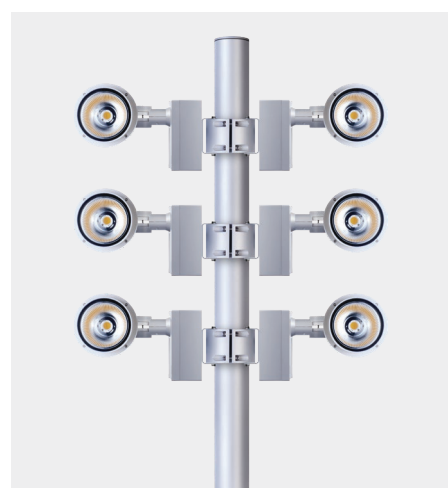

Private residence, Bangkok – THAILAND

• MODULAR SOLUTIONS




▪ SONIC + Accessory kit for Pole Mount Solutions

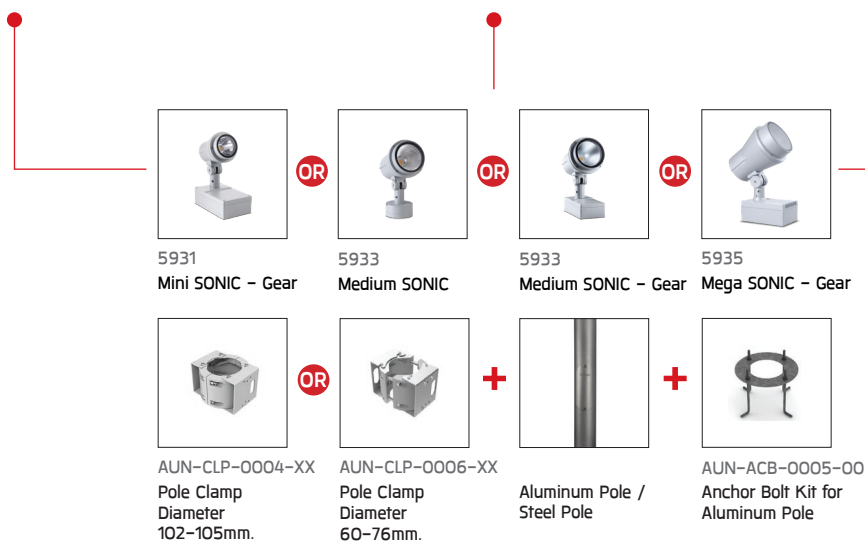


• MODULAR SOLUTIONS

■ SONIC + Accessory kit for Pole Mount Solutions

*Pole mounting arm for 1-3 projector is available for installation on 1 or 2 sides
*Please see Poles & Anchor bolt section for pole mounting options

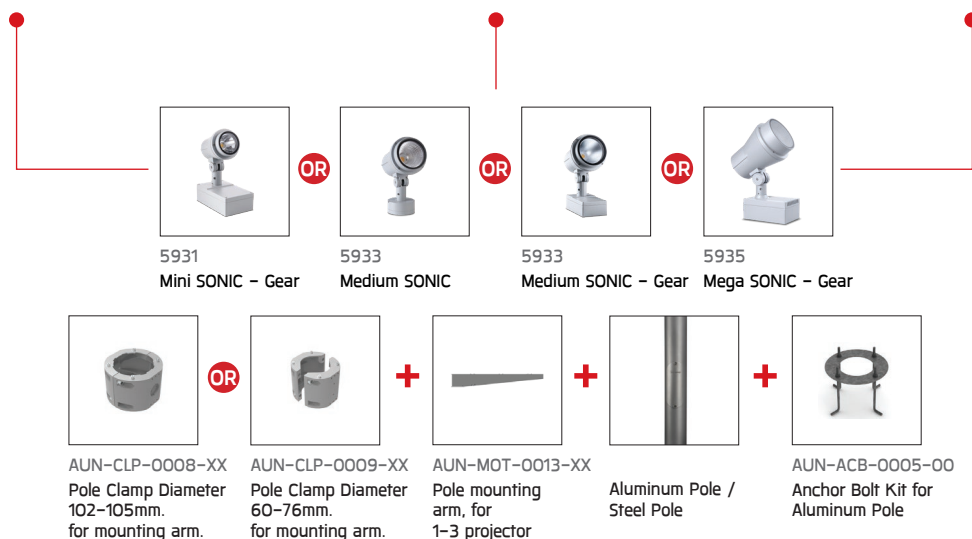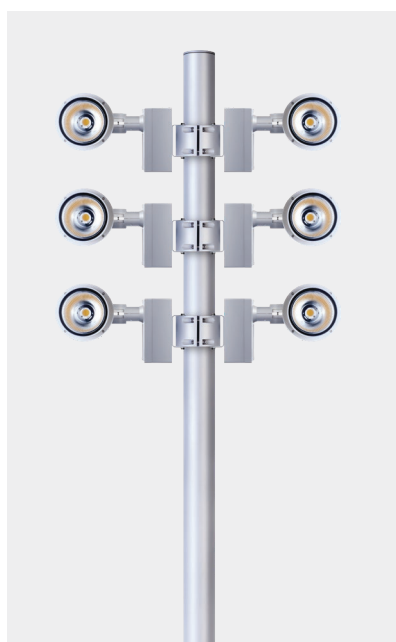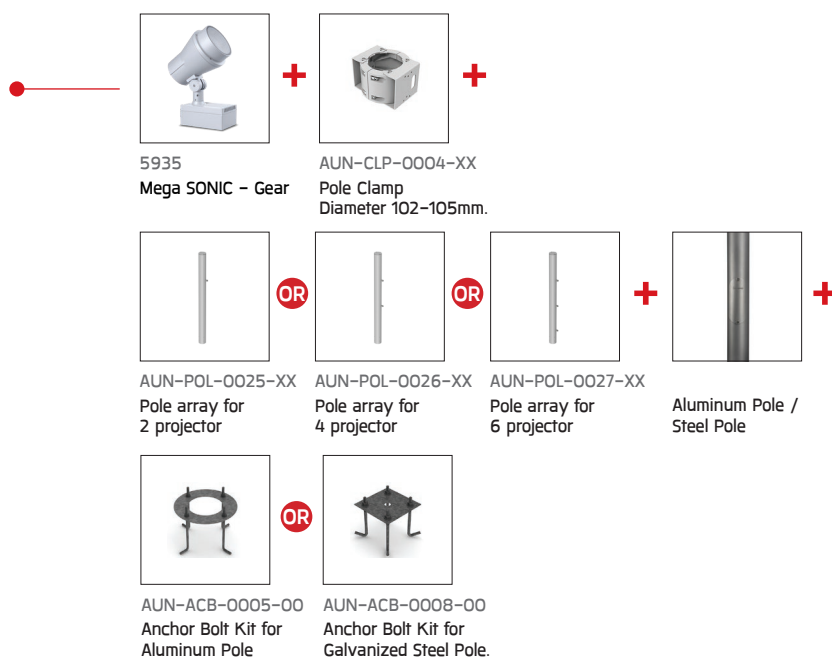


• MODULAR SOLUTIONS


					
Accessory		Mini SONIC – Gear	Medium SONIC	Medium SONIC – Gear	Mega SONIC – Gear
	Pole Clamp Diameter 102-105mm.	•	•	•	•
	Pole Clamp Diameter 60-76mm.	•	•	•	•
	Pole Clamp Diameter 102-105mm. for mounting arm.	•	•	•	•
	Pole Clamp Diameter 60-76mm. for mounting arm.	•	•	•	•
	Pole mounting arm, for 1-3 projector	•	•	•	•
	Wall array, for 2 projector	–	–	–	•
	Wall array, for 4 projector	–	–	–	•
	Wall array, for 6 projector	–	–	–	•
	Pole array for 2 projector	–	–	–	•
	Pole array for 4 projector	–	–	–	•
	Pole array for 6 projector	–	–	–	•
	Anchor Bolt Kit for Aluminum Pole	•	•	•	•
	Anchor Bolt Kit for Galvanized Steel Pole.	•	•	•	•
	Aluminum Pole	•	•	•	•
	Galvanized Steel Pole	•	•	•	•



Mini SONIC
Stand



Medium SONIC
Stand



SONIC

Application Type : Projector
Subgroup : Circular

Mini SONIC Stand / 5831

Medium SONIC Stand / 5833

Luminaire Performance

200 - 3720 lm

8.4 - 41 W

18 - 104 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K


Controller

On-off/ On-off (AC LED)/ DIM 1-10V/ DALI/ Remote

Input Voltage

24Vdc
220-240VAC 50/60HZ


Accessories

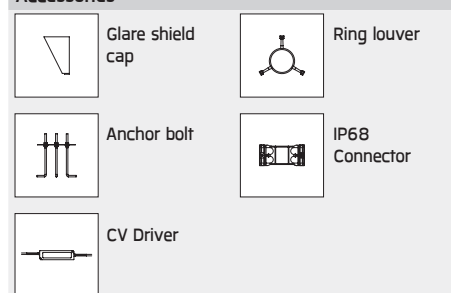


SONIC




Mini SONIC Gear

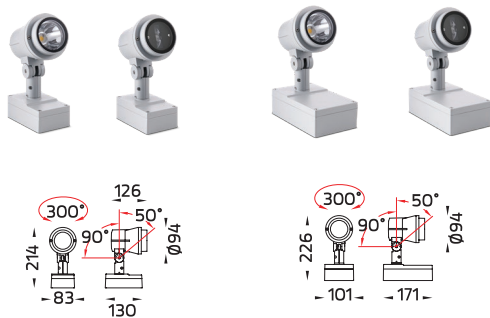


Medium SONIC Gear

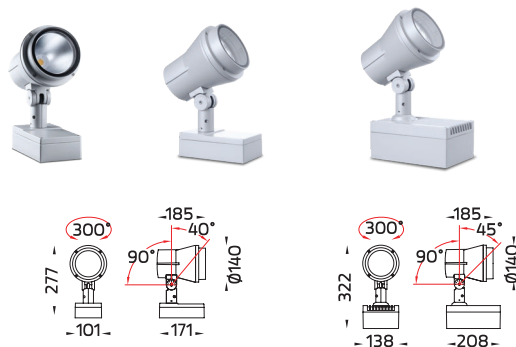

Medium SONIC



Mega SONIC Gear



Queen sirikit national convention centre,
Bangkok - THAILAND

SONIC

Application Type : Projector
Subgroup : Circular

Mini SONIC / 5931

Medium SONIC / 5933

Mega SONIC / 5935

Luminaire Performance

200 - 8160 lm

8.4 - 57 W

18 - 143 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller


On-off/ On-off (AC LED)/ DIM 1-10V/ DALI/ Remote

Input Voltage

24Vdc

220-240VAC 50/60HZ



Accessories

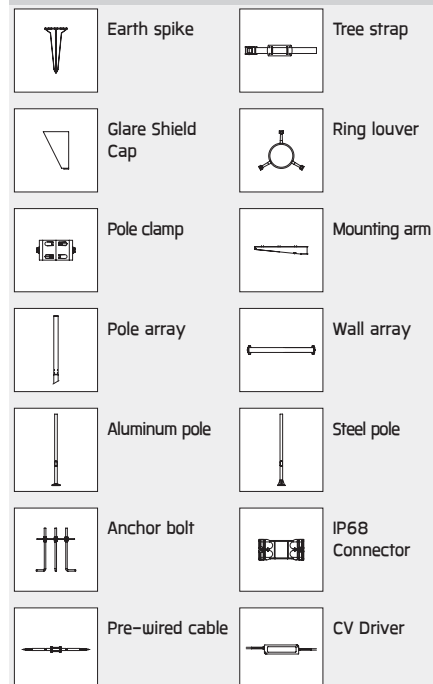


*Please see Poles & Anchor bolt section for pole mounting options




Mini SONIC Arm
Gear

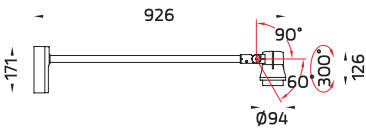

Medium SONIC Arm
Gear



Mega SONIC Arm
Gear

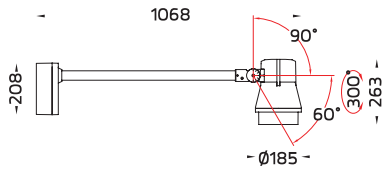

SONIC


Application Type : Projector
Subgroup : Circular

Mini SONIC Arm / 5932
Medium SONIC Arm / 5934
Mega SONIC Arm / 5936

Luminaire Performance

1160 – 8070 lm
14 – 57 W
58 – 141 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

On-off/ On-off [AC LED]/ DIM 1-10V/ DALI

Input Voltage

220-240VAC 50/60HZ

Accessories



Glare shield cap



Ring louver

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller					Ordering Code
											REMOTE	
Mini SONIC Stand	OD-5831											
		8.4 W	Sharp Elliptical H	2700 K	200 lm	23 lm/W					•	5831-P-7-797-XX
				3000 K	200 lm	23 lm/W					•	5831-P-7-798-XX
				4000 K	210 lm	25 lm/W					•	5831-P-7-799-XX
				2700 K	200 lm	23 lm/W					•	5831-Q-7-797-XX
		10 W	Sharp Elliptical H	3000 K	200 lm	23 lm/W					•	5831-Q-7-798-XX
				4000 K	210 lm	25 lm/W					•	5831-Q-7-799-XX
				2700 K	200 lm	20 lm/W	•					5831-P-3-646-XX
				3000 K	200 lm	20 lm/W	•					5831-P-3-647-XX
				4000 K	210 lm	21 lm/W	•					5831-P-3-648-XX
		10 W	Sharp Elliptical H	2700 K	200 lm	20 lm/W			•			5831-P-4-646-XX
				3000 K	200 lm	20 lm/W			•			5831-P-4-647-XX
				4000 K	210 lm	21 lm/W			•			5831-P-4-648-XX
				2700 K	200 lm	20 lm/W				•		5831-P-5-646-XX
		10 W	Sharp Elliptical V	3000 K	200 lm	20 lm/W				•		5831-P-5-647-XX
				4000 K	210 lm	21 lm/W				•		5831-P-5-648-XX
				2700 K	200 lm	20 lm/W	•					5831-Q-3-646-XX
				3000 K	200 lm	20 lm/W	•					5831-Q-3-647-XX
		10 W	Sharp Elliptical V	4000 K	210 lm	21 lm/W	•					5831-Q-3-648-XX
				2700 K	200 lm	20 lm/W			•			5831-Q-4-646-XX
				3000 K	200 lm	20 lm/W			•			5831-Q-4-647-XX
				4000 K	210 lm	21 lm/W			•			5831-Q-4-648-XX
		13 W	Sharp Elliptical H	2700 K	200 lm	20 lm/W					•	5831-Q-5-646-XX
				3000 K	200 lm	20 lm/W					•	5831-Q-5-647-XX
				4000 K	210 lm	21 lm/W					•	5831-Q-5-648-XX
				2700 K	280 lm	21 lm/W					•	5831-P-7-759-XX
		14 W	13°	3000 K	280 lm	21 lm/W					•	5831-P-7-760-XX
				4000 K	300 lm	23 lm/W					•	5831-P-7-796-XX
				2700 K	280 lm	21 lm/W					•	5831-Q-7-759-XX
				3000 K	280 lm	21 lm/W					•	5831-Q-7-760-XX
		14 W	13°	4000 K	300 lm	23 lm/W					•	5831-Q-7-796-XX
				2700 K	1380 lm	98 lm/W	•					5831-A-3-503-XX
				3000 K	1460 lm	104 lm/W	•					5831-A-3-901-XX
				4000 K	1530 lm	109 lm/W	•					5831-A-3-904-XX
		14 W	13°	2700 K	1380 lm	98 lm/W			•			5831-A-4-503-XX
				3000 K	1460 lm	104 lm/W			•			5831-A-4-901-XX
				4000 K	1530 lm	109 lm/W			•			5831-A-4-904-XX
				2700 K	1380 lm	98 lm/W				•		5831-A-5-503-XX
		14 W	20°	3000 K	1460 lm	104 lm/W				•		5831-A-5-901-XX
				4000 K	1530 lm	109 lm/W				•		5831-A-5-904-XX
				2700 K	1330 lm	95 lm/W	•					5831-B-3-503-XX
				3000 K	1400 lm	100 lm/W	•					5831-B-3-901-XX
		14 W	20°	4000 K	1460 lm	104 lm/W	•					5831-B-3-904-XX
				2700 K	1330 lm	95 lm/W			•			5831-B-4-503-XX
				3000 K	1400 lm	100 lm/W			•			5831-B-4-901-XX
				4000 K	1460 lm	104 lm/W			•			5831-B-4-904-XX
		14 W	53°	2700 K	1330 lm	95 lm/W				•		5831-B-5-503-XX
				3000 K	1400 lm	100 lm/W				•		5831-B-5-901-XX
				4000 K	1460 lm	104 lm/W				•		5831-B-5-904-XX
				2700 K	1300 lm	92 lm/W	•					5831-D-3-503-XX
		15 W	26°	3000 K	1370 lm	97 lm/W	•					5831-D-3-901-XX
				4000 K	1430 lm	102 lm/W	•					5831-D-3-904-XX
				2700 K	1300 lm	92 lm/W			•			5831-D-4-503-XX
				3000 K	1370 lm	97 lm/W			•			5831-D-4-901-XX
		15 W	42°	4000 K	1430 lm	102 lm/W			•			5831-D-4-904-XX
				2700 K	1300 lm	92 lm/W				•		5831-D-5-503-XX
				3000 K	1370 lm	97 lm/W				•		5831-D-5-901-XX
				4000 K	1430 lm	102 lm/W				•		5831-D-5-904-XX
		15 W	Sharp Elliptical H	3000 K	1400 lm	93 lm/W	•					5831-6-3-901-XX
				4000 K	1460 lm	97 lm/W	•					5831-6-3-904-XX
				2700 K	280 lm	18 lm/W	•					5831-P-3-630-XX
				3000 K	280 lm	18 lm/W	•					5831-P-3-644-XX
		15 W	Sharp Elliptical H	4000 K	300 lm	20 lm/W	•					5831-P-3-645-XX
				2700 K	280 lm	18 lm/W			•			5831-P-4-630-XX
				3000 K	280 lm	18 lm/W			•			5831-P-4-644-XX
				4000 K	300 lm	20 lm/W			•			5831-P-4-645-XX
		15 W	Sharp Elliptical V	2700 K	280 lm	18 lm/W				•		5831-P-5-630-XX
				3000 K	280 lm	18 lm/W				•		5831-P-5-644-XX
				4000 K	300 lm	20 lm/W				•		5831-P-5-645-XX
				2700 K	280 lm	18 lm/W	•					5831-Q-3-630-XX
		15 W	Sharp Elliptical V	3000 K	280 lm	18 lm/W	•					5831-Q-3-644-XX
				4000 K	300 lm	20 lm/W	•					5831-Q-3-645-XX
				2700 K	280 lm	18 lm/W			•			5831-Q-4-630-XX
				3000 K	280 lm	18 lm/W			•			5831-Q-4-644-XX
		15 W	Sharp Elliptical V	4000 K	300 lm	20 lm/W			•			5831-Q-4-645-XX
				2700 K	280 lm	18 lm/W				•		5831-Q-5-630-XX
				3000 K	280 lm	18 lm/W				•		5831-Q-5-644-XX
				4000 K	300 lm	20 lm/W				•		5831-Q-5-645-XX

*Please contact sales team for special request.

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller					Ordering Code
											REMOTE	
Medium SONIC Stand	OD-5833											
		20 W	16°	3000 K 4000 K	1140 lm 1200 lm	57 lm/W 60 lm/W		• •				5833-6-3-873-XX 5833-6-3-874-XX
Mini SONIC	OD-5931		8.4 W	Sharp Elliptical H	3000 K	2710 lm	100 lm/W					5833-6-3-887-XX
					3000 K	2300 lm	85 lm/W	•				5833-7-3-887-XX
					2700 K	2200 lm	81 lm/W	•				5833-7-3-506-XX
			30 W	14°	4000 K	1990 lm	66 lm/W		•			5833-5-3-878-XX
					2700 K	3720 lm	90 lm/W	•				5833-5-3-505-XX
					3000 K	3330 lm	81 lm/W	•				5833-7-3-902-XX
			41 W	48°	3000 K	3330 lm	81 lm/W					
					3000 K	200 lm	23 lm/W				•	5931-P-7-797-XX
					3000 K	200 lm	23 lm/W				•	5931-P-7-798-XX
					4000 K	210 lm	25 lm/W				•	5931-P-7-799-XX
			8.4 W	Sharp Elliptical V	2700 K	200 lm	23 lm/W				•	5931-Q-7-797-XX
					3000 K	200 lm	23 lm/W				•	5931-Q-7-798-XX
					4000 K	210 lm	25 lm/W				•	5931-Q-7-799-XX
			10 W	Sharp Elliptical H	2700 K	200 lm	20 lm/W	•				5931-P-3-646-XX
					3000 K	200 lm	20 lm/W	•				5931-P-3-647-XX
					4000 K	210 lm	21 lm/W	•				5931-P-3-648-XX
			10 W	Sharp Elliptical H	2700 K	200 lm	20 lm/W			•		5931-P-4-646-XX
					3000 K	200 lm	20 lm/W			•		5931-P-4-647-XX
					4000 K	210 lm	21 lm/W			•		5931-P-4-648-XX
			10 W	Sharp Elliptical H	2700 K	200 lm	20 lm/W			•		5931-P-5-646-XX
					3000 K	200 lm	20 lm/W			•		5931-P-5-647-XX
					4000 K	210 lm	21 lm/W			•		5931-P-5-648-XX
			10 W	Sharp Elliptical V	2700 K	200 lm	20 lm/W	•				5931-Q-3-646-XX
					3000 K	200 lm	20 lm/W	•				5931-Q-3-647-XX
					4000 K	210 lm	21 lm/W	•				5931-Q-3-648-XX
			10 W	Sharp Elliptical V	2700 K	200 lm	20 lm/W			•		5931-Q-4-646-XX
					3000 K	200 lm	20 lm/W			•		5931-Q-4-647-XX
					4000 K	210 lm	21 lm/W			•		5931-Q-4-648-XX
			13 W	Sharp Elliptical H	2700 K	200 lm	20 lm/W			•		5931-Q-5-646-XX
					3000 K	200 lm	20 lm/W			•		5931-Q-5-647-XX
					4000 K	210 lm	21 lm/W			•		5931-Q-5-648-XX
			13 W	Sharp Elliptical H	2700 K	200 lm	20 lm/W			•		5931-Q-5-647-XX
					3000 K	200 lm	20 lm/W			•		5931-Q-5-648-XX
					4000 K	210 lm	21 lm/W			•		5931-Q-5-649-XX
			14 W	13°	2700 K	280 lm	21 lm/W				•	5931-P-7-759-XX
					3000 K	280 lm	21 lm/W				•	5931-P-7-760-XX
					4000 K	300 lm	23 lm/W				•	5931-P-7-796-XX
			14 W	13°	2700 K	280 lm	21 lm/W				•	5931-Q-7-759-XX
					3000 K	280 lm	21 lm/W				•	5931-Q-7-760-XX
					4000 K	300 lm	23 lm/W				•	5931-Q-7-796-XX
			14 W	13°	2700 K	1380 lm	98 lm/W	•				5931-A-3-503-XX
					3000 K	1460 lm	104 lm/W	•				5931-A-3-901-XX
					4000 K	1530 lm	109 lm/W	•				5931-A-3-904-XX
			14 W	13°	2700 K	1380 lm	98 lm/W			•		5931-A-4-503-XX
					3000 K	1460 lm	104 lm/W			•		5931-A-4-901-XX
					4000 K	1530 lm	109 lm/W			•		5931-A-4-904-XX
			14 W	13°	2700 K	1380 lm	98 lm/W			•		5931-A-5-503-XX
					3000 K	1460 lm	104 lm/W			•		5931-A-5-901-XX
					4000 K	1530 lm	109 lm/W			•		5931-A-5-904-XX
			14 W	20°	2700 K	1330 lm	95 lm/W	•				5931-B-3-503-XX
					3000 K	1400 lm	100 lm/W	•				5931-B-3-901-XX
					4000 K	1460 lm	104 lm/W	•				5931-B-3-904-XX
			14 W	20°	2700 K	1330 lm	95 lm/W			•		5931-B-4-503-XX
					3000 K	1400 lm	100 lm/W			•		5931-B-4-901-XX
					4000 K	1460 lm	104 lm/W			•		5931-B-4-904-XX
			14 W	20°	2700 K	1330 lm	95 lm/W			•		5931-B-5-503-XX
					3000 K	1400 lm	100 lm/W			•		5931-B-5-901-XX
					4000 K	1460 lm	104 lm/W			•		5931-B-5-904-XX
			14 W	53°	2700 K	1300 lm	92 lm/W	•				5931-D-3-503-XX
					3000 K	1370 lm	97 lm/W	•				5931-D-3-901-XX
					4000 K	1430 lm	102 lm/W	•				5931-D-3-904-XX
			14 W	53°	2700 K	1300 lm	92 lm/W			•		5931-D-4-503-XX
					3000 K	1370 lm	97 lm/W			•		5931-D-4-901-XX
					4000 K	1430 lm	102 lm/W			•		5931-D-4-904-XX
			14 W	53°	2700 K	1300 lm	92 lm/W			•		5931-D-5-503-XX
					3000 K	1370 lm	97 lm/W			•		5931-D-5-901-XX
					4000 K	1430 lm	102 lm/W			•		5931-D-5-904-XX
			15 W	13°	3000 K	1460 lm	97 lm/W	•				5931-5-3-901-XX
					4000 K	1530 lm	102 lm/W	•				5931-5-3-904-XX
					2700 K	1380 lm	92 lm/W	•				5931-5-3-503-XX
			15 W	13°	3000 K	1460 lm	97 lm/W			•		5931-5-4-901-XX
					3000 K	1460 lm	97 lm/W			•		5931-5-5-901-XX
					2700 K	1380 lm	92 lm/W			•		5931-5-5-503-XX
			15 W	26°	3000 K	1400 lm	93 lm/W	•				5931-6-3-901-XX
					4000 K	1460 lm	97 lm/W	•				5931-6-3-904-XX
					2700 K	1330 lm	88 lm/W	•				5931-6-3-503-XX
			15 W	26°	3000 K	1400 lm	93 lm/W			•		5931-6-5-901-XX
					4000 K	1460 lm	97 lm/W			•		5931-6-5-904-XX
					2700 K	1330 lm	88 lm/W			•		5931-6-5-503-XX
			15 W	42°	3000 K	1350 lm	90 lm/W	•				5931-7-3-901-XX
					4000 K	1410 lm	94 lm/W	•				5931-7-3-904-XX
					2700 K	1280 lm	85 lm/W	•				5931-7-3-503-XX

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller					Ordering Code	
											REMOTE		
Mini SONIC	OD-5931		Sharp Elliptical V	2700 K	280 lm	18 lm/W	•					5931-P-3-630-XX	
	3000 K			280 lm	18 lm/W	•					5931-P-3-644-XX		
	4000 K			300 lm	20 lm/W	•					5931-P-3-645-XX		
	2700 K			280 lm	18 lm/W			•			5931-P-4-630-XX		
	3000 K			280 lm	18 lm/W			•			5931-P-4-644-XX		
	4000 K			300 lm	20 lm/W			•			5931-P-4-645-XX		
		Gear	Sharp Elliptical V	2700 K	280 lm	18 lm/W				•		5931-P-5-630-XX	
	3000 K			280 lm	18 lm/W				•		5931-P-5-644-XX		
	4000 K			300 lm	20 lm/W				•		5931-P-5-645-XX		
	2700 K			280 lm	18 lm/W	•					5931-Q-3-630-XX		
	3000 K			280 lm	18 lm/W	•					5931-Q-3-644-XX		
	4000 K			300 lm	20 lm/W	•					5931-Q-3-645-XX		
Medium SONIC	OD-5933		20 W	10°	3000 K	1210 lm	60 lm/W		•				5933-5-3-873-XX
	4000 K				1270 lm	63 lm/W		•				5933-5-3-874-XX	
	16°			3000 K	1140 lm	57 lm/W		•				5933-6-3-873-XX	
			4000 K	1200 lm	60 lm/W		•				5933-6-3-874-XX		
	30 W		38°	3000 K	1160 lm	58 lm/W		•				5933-7-3-873-XX	
				4000 K	1220 lm	61 lm/W		•				5933-7-3-874-XX	
		14°	3000 K	1890 lm	63 lm/W		•				5933-5-3-877-XX		
	4000 K		1990 lm	66 lm/W		•				5933-5-3-878-XX			
	47°	3000 K	1770 lm	59 lm/W		•				5933-6-3-877-XX			
		3000 K	1820 lm	60 lm/W		•				5933-7-3-877-XX			
		4000 K	1920 lm	64 lm/W		•				5933-7-3-878-XX			
	Medium SONIC – Gear	OD-5933		27 W	12°	3000 K	2680 lm	99 lm/W	•				
3000 K		2680 lm				99 lm/W				•			5933-5-4-887-XX
27 W		23°		3000 K	2710 lm	100 lm/W	•					5933-6-3-887-XX	
				4000 K	2780 lm	102 lm/W	•					5933-6-3-891-XX	
2700 K		2590 lm		95 lm/W	•						5933-6-3-506-XX		
		3000 K		2710 lm	100 lm/W				•			5933-6-4-887-XX	
		27 W	48°	4000 K	2780 lm	102 lm/W				•			5933-6-4-891-XX
				3000 K	2300 lm	85 lm/W	•						5933-7-3-887-XX
		4000 K		2360 lm	87 lm/W	•						5933-7-3-891-XX	
		2700 K		2200 lm	81 lm/W	•						5933-7-3-506-XX	
		41 W	12°	3000 K	2300 lm	85 lm/W				•			5933-7-4-887-XX
				4000 K	2360 lm	87 lm/W				•			5933-7-4-891-XX
Mega SONIC – Gear	OD-5935		41 W	23°	3000 K	3890 lm	94 lm/W	•					5933-5-3-902-XX
	4000 K				4000 lm	97 lm/W	•						5933-5-3-905-XX
	2700 K			3720 lm	90 lm/W	•						5933-5-3-505-XX	
	41 W		23°	3000 K	3930 lm	95 lm/W	•						5933-6-3-902-XX
				2700 K	3770 lm	91 lm/W	•						5933-6-3-505-XX
	41 W		48°	2700 K	3770 lm	91 lm/W				•			5933-6-5-505-XX
		3000 K		3930 lm	95 lm/W				•			5933-6-5-902-XX	
		41 W	48°	3000 K	3330 lm	81 lm/W	•						5933-7-3-902-XX
				4000 K	3420 lm	83 lm/W	•						5933-7-3-905-XX
		57 W	17°	3000 K	3330 lm	81 lm/W				•			5933-7-5-902-XX
				3000 K	7770 lm	136 lm/W	•						5935-5-3-888-XX
		57 W	24°	4000 K	8160 lm	143 lm/W	•						5935-5-3-892-XX
2700 K				6470 lm	113 lm/W	•						5935-5-3-508-XX	
Mega SONIC – Gear		57 W	17°	3000 K	7770 lm	136 lm/W				•			5935-5-5-888-XX
				4000 K	8160 lm	143 lm/W				•			5935-5-5-892-XX
		57 W	24°	3000 K	7680 lm	134 lm/W	•						5935-6-3-888-XX
				4000 K	8070 lm	141 lm/W	•						5935-6-3-892-XX
		57 W	37°	4000 K	8070 lm	141 lm/W				•			5935-6-5-892-XX
				3000 K	7590 lm	133 lm/W	•						5935-7-3-888-XX
		57 W	37°	4000 K	7970 lm	139 lm/W	•						5935-7-3-892-XX
				2700 K	6320 lm	110 lm/W	•						5935-7-3-508-XX
		57 W	37°	4000 K	7970 lm	139 lm/W				•			5935-7-4-892-XX
				3000 K	7590 lm	133 lm/W				•			5935-7-5-888-XX
		4000 K	7970 lm	139 lm/W				•			5935-7-5-892-XX		

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller					Ordering Code
											REMOTE	
Mini SONIC Arm	OD-5932 	14 W	13°	4000 K	1530 lm	109 lm/W				•		5932-A-5-904-XX
		14 W	20°	2700 K	1330 lm	95 lm/W	•					5932-B-3-503-XX
				3000 K	1400 lm	100 lm/W	•					5932-B-3-901-XX
				4000 K	1460 lm	104 lm/W	•					5932-B-3-904-XX
				2700 K	1330 lm	95 lm/W			•			5932-B-4-503-XX
				3000 K	1400 lm	100 lm/W			•			5932-B-4-901-XX
				4000 K	1460 lm	104 lm/W			•			5932-B-4-904-XX
				2700 K	1330 lm	95 lm/W				•		5932-B-5-503-XX
				3000 K	1400 lm	100 lm/W				•		5932-B-5-901-XX
				4000 K	1460 lm	104 lm/W				•		5932-B-5-904-XX
		14 W	53°	2700 K	1300 lm	92 lm/W	•					5932-D-3-503-XX
				3000 K	1370 lm	97 lm/W	•					5932-D-3-901-XX
				4000 K	1430 lm	102 lm/W	•					5932-D-3-904-XX
				2700 K	1300 lm	92 lm/W			•			5932-D-4-503-XX
				3000 K	1370 lm	97 lm/W			•			5932-D-4-901-XX
				4000 K	1430 lm	102 lm/W			•			5932-D-4-904-XX
				2700 K	1300 lm	92 lm/W				•		5932-D-5-503-XX
				3000 K	1370 lm	97 lm/W				•		5932-D-5-901-XX
				4000 K	1430 lm	102 lm/W				•		5932-D-5-904-XX
		15 W	13°	3000 K	1460 lm	97 lm/W	•					5932-5-3-901-XX
				2700 K	1380 lm	92 lm/W	•					5932-5-3-503-XX
			26°	3000 K	1400 lm	93 lm/W	•					5932-6-3-901-XX
				2700 K	1330 lm	88 lm/W	•					5932-6-3-503-XX
			42°	3000 K	1350 lm	90 lm/W	•					5932-7-3-901-XX
				4000 K	1410 lm	94 lm/W	•					5932-7-3-904-XX
Medium SONIC Arm	OD-5934 	20 W	38°	3000 K	1160 lm	58 lm/W		•				5934-7-3-873-XX
		27 W	23°	3000 K	2710 lm	100 lm/W	•					5934-6-3-887-XX
			48°	3000 K	2300 lm	85 lm/W	•					5934-7-3-887-XX
		30 W	47°	3000 K	1820 lm	60 lm/W		•				5934-7-3-877-XX
		41 W	23°	3000 K	3930 lm	95 lm/W	•					5934-6-3-902-XX
			48°	3000 K	3330 lm	81 lm/W	•					5934-7-3-902-XX
Mega SONIC Arm	OD-5936 	57 W	24°	4000 K	8070 lm	141 lm/W	•					5936-6-3-892-XX
			37°	3000 K	7590 lm	133 lm/W	•					5936-7-3-888-XX



Siam Power, Nonthaburi – THAILAND

PROJECTOR



KUBIK is a robust cube-shaped spotlight/floodlight with LED light source. The family offers ground/wall mount fixing, pole clamp and wall clamp array, indirect pole light and wall light. The front glass cover is flush to the luminaire housing thus dust and water are not accumulated. High efficiency lenses and reflectors are used in this luminaire family. Aiming can be done through graduated scale by tool.

The luminaire housing separates LED and driver compartment to achieve lower operating temperature and longer service time. **KUBIK** is suitable to light up object from short to medium distance like bushes, plants, sculptures, flags, signboards, columns, building facets, etc.



www.unilamp.co.th/en/p/kubik

Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module.
- Available with integrated driver or remote driver.
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.

Available Color




***Custom colors are available on request.*




• MODULAR SOLUTIONS

Micro KUBIK + Aluminum Earth Spike


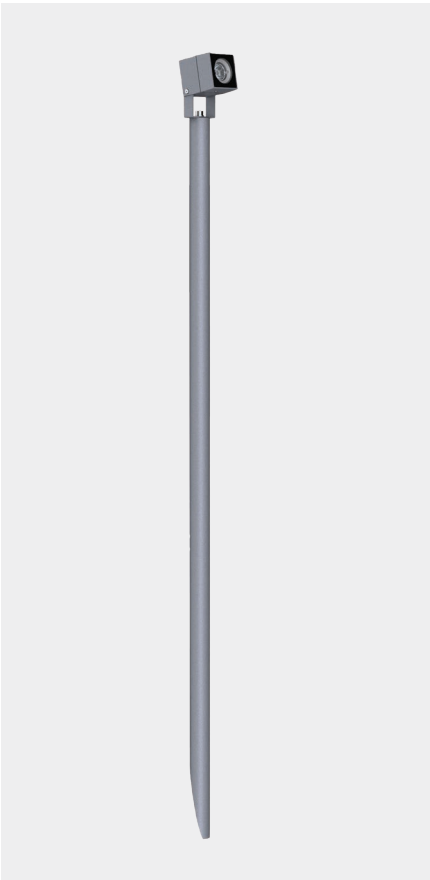


Micro KUBIK + Aluminum Earth Spike


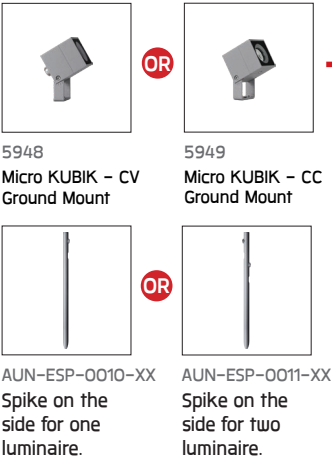


• MODULAR SOLUTIONS

KUBIK + Wall Array

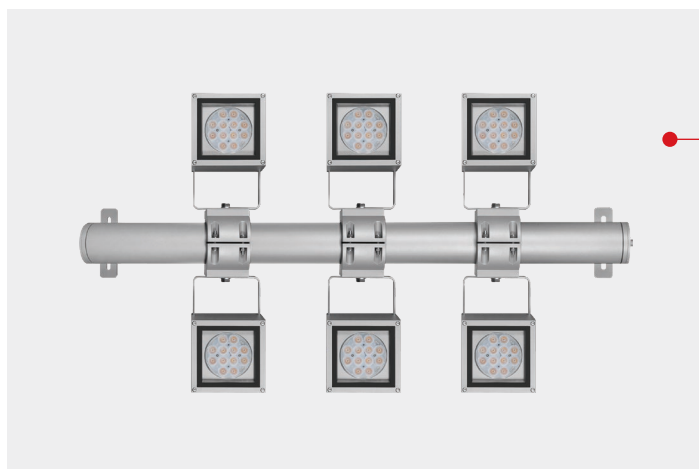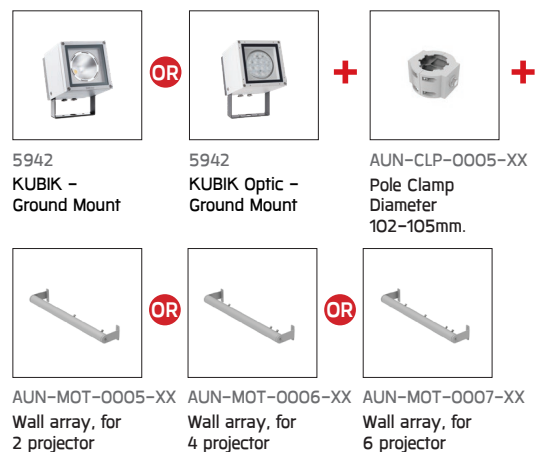


KUBIK + Pole Array + Pole

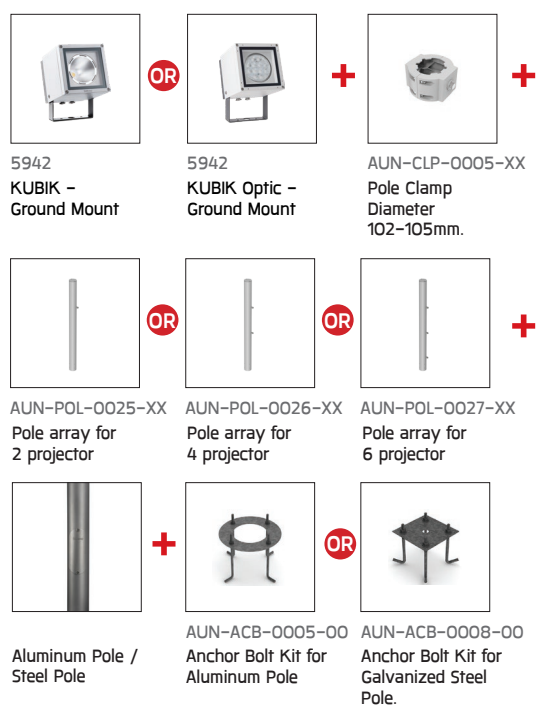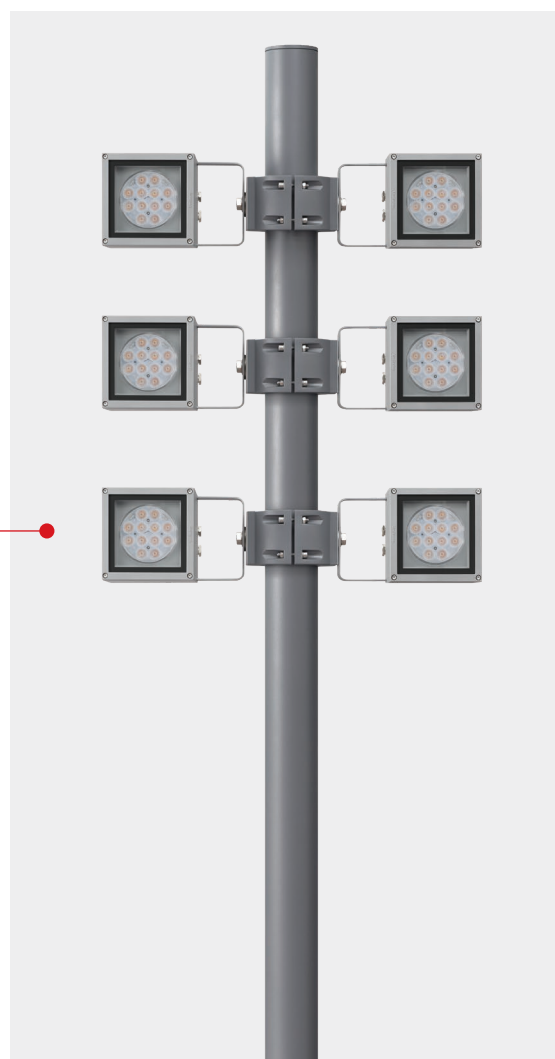

KUBIK



Micro KUBIK
CC/CV

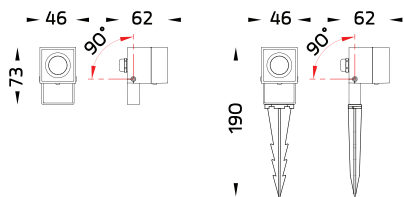

KUBIK


Application Type : Projector
Subgroup : Rectangular

Micro KUBIK – CV/ 5948
Micro KUBIK – CC/ 5949

Luminaire Performance

220 – 310 lm
3.3 – 3.9 W
64 – 84 lm/W

Beam Options



Color Temperature

2700K/ 3000K


Controller

Remote

Input Voltage


12VDC/24VDC
1200mA, 3.17Vdc, Uin max 50Vdc

Accessories

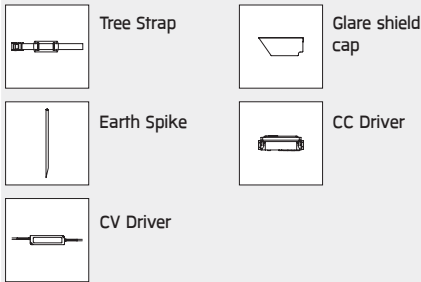




Mini KUBIK
CC/CVDA



Mini Slim KUBIK
CVDA



KUBIK

Application Type : Projector
Subgroup : Rectangular

Mini Slim KUBIK/ 5940
Mini Slim KUBIK – CVDA/ 5940
Mini KUBIK/ 5941
Mini KUBIK – CVDA/ 5941

Luminaire Performance

220 – 1740 lm
8 – 14 W
22 – 124 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K


Controller

On-off/ On-off/ DALI/ DALI/ Remote

Input Voltage

24VDC
220–240Vac 50/60Hz
1050mA, 11.9Vdc, Uin max 150Vdc
1050mA, 12.5Vdc, Uin max 150Vdc


Accessories

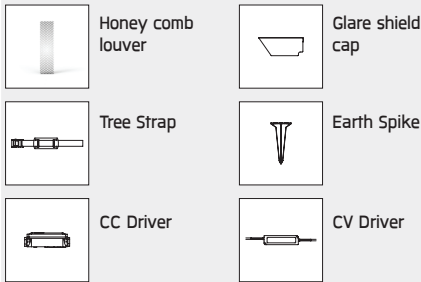

KUBIK



KUBIK
CC/CC [DMX]



KUBIK

Application Type : Projector
Subgroup : Rectangular

KUBIK/ 5942

KUBIK - CC/ 5942

KUBIK - CC [DMX]/ 5942

Luminaire Performance

1420 - 4520 lm

24 - 43 W

59 - 113 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K/ RGBW

Controller

On-off/ 1-10V/ DALI/ Remote

Input Voltage

220-240VAC 50/60HZ

24Vdc, 4CHx5Vdc-6.5Vdc, Uin max 150Vdc

700mA, 4CHx5Vdc-6.5Vdc, Uin max 150Vdc

Accessories

	Honey comb louver		Softening lens
	Glare shield ring		Pole clamp
	Wall array		Pole array
	Glare shield cap		Barn door
	Aluminum pole		Steel pole
	IP68 Connector		CC Driver
	CV Driver		IP67 Water Tight
	IP68 Water Tight		Splitter DMX
	Cable		XLR 3 pin
	DMX Controller		

* please see more accessories details at the back of catalogue or visit our website.

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller					Ordering Code
										REMOTE	
OD-5940   CVDA	8 W	12°	2700 K	600 lm	75 lm/W	•					5940-A-3-524-XX
			3000 K	600 lm	75 lm/W	•					5940-A-3-867-XX
			4000 K	640 lm	80 lm/W	•					5940-A-3-868-XX
	8 W	25°	2700 K	460 lm	57 lm/W	•					5940-B-3-524-XX
			3000 K	460 lm	57 lm/W	•					5940-B-3-867-XX
			4000 K	490 lm	61 lm/W	•					5940-B-3-868-XX
	8 W	46°	2700 K	480 lm	60 lm/W	•					5940-C-3-524-XX
			3000 K	480 lm	60 lm/W	•					5940-C-3-867-XX
			4000 K	510 lm	63 lm/W	•					5940-C-3-868-XX
	8 W	43°/14°	2700 K	480 lm	60 lm/W	•					5940-H-3-524-XX
			3000 K	480 lm	60 lm/W	•					5940-H-3-867-XX
			4000 K	510 lm	63 lm/W	•					5940-H-3-868-XX
	8 W	14°/43°	2700 K	480 lm	60 lm/W	•					5940-N-3-524-XX
			3000 K	480 lm	60 lm/W	•					5940-N-3-867-XX
			4000 K	510 lm	63 lm/W	•					5940-N-3-868-XX
	8.1 W	12°	2700 K	800 lm	98 lm/W		•				5940-A-7-580-XX
			3000 K	800 lm	98 lm/W		•				5940-A-7-581-XX
			4000 K	850 lm	104 lm/W		•				5940-A-7-582-XX
	8.1 W	25°	2700 K	620 lm	76 lm/W		•				5940-B-7-580-XX
			3000 K	620 lm	76 lm/W		•				5940-B-7-581-XX
			4000 K	660 lm	81 lm/W		•				5940-B-7-582-XX
	8.1 W	46°	2700 K	640 lm	79 lm/W		•				5940-C-7-580-XX
			3000 K	640 lm	79 lm/W		•				5940-C-7-581-XX
			4000 K	680 lm	83 lm/W		•				5940-C-7-582-XX
	8.1 W	43°/14°	2700 K	640 lm	79 lm/W		•				5940-H-7-580-XX
			3000 K	640 lm	79 lm/W		•				5940-H-7-581-XX
			4000 K	680 lm	83 lm/W		•				5940-H-7-582-XX
	8.1 W	14°/43°	2700 K	640 lm	79 lm/W		•				5940-N-7-580-XX
			3000 K	640 lm	79 lm/W		•				5940-N-7-581-XX
			4000 K	680 lm	83 lm/W		•				5940-N-7-582-XX
	10 W	12°	2700 K	800 lm	80 lm/W	•					5940-A-3-523-XX
			3000 K	800 lm	80 lm/W	•					5940-A-3-897-XX
			4000 K	850 lm	85 lm/W	•					5940-A-3-898-XX
	10 W	25°	2700 K	800 lm	80 lm/W				•		5940-A-5-523-XX
			3000 K	800 lm	80 lm/W				•		5940-A-5-897-XX
			4000 K	850 lm	85 lm/W				•		5940-A-5-898-XX
			2700 K	620 lm	62 lm/W	•					5940-B-3-523-XX
			3000 K	620 lm	62 lm/W	•					5940-B-3-897-XX
			4000 K	660 lm	66 lm/W	•					5940-B-3-898-XX
	10 W	46°	2700 K	620 lm	62 lm/W				•		5940-B-5-523-XX
			3000 K	620 lm	62 lm/W				•		5940-B-5-897-XX
			4000 K	660 lm	66 lm/W				•		5940-B-5-898-XX
			2700 K	640 lm	64 lm/W	•					5940-C-3-523-XX
			3000 K	640 lm	64 lm/W	•					5940-C-3-897-XX
			4000 K	680 lm	68 lm/W	•					5940-C-3-898-XX
	10 W	43°/14°	2700 K	640 lm	64 lm/W				•		5940-C-5-523-XX
			3000 K	640 lm	64 lm/W				•		5940-C-5-897-XX
			4000 K	680 lm	68 lm/W				•		5940-C-5-898-XX
			2700 K	640 lm	64 lm/W	•					5940-H-3-523-XX
			3000 K	640 lm	64 lm/W	•					5940-H-3-897-XX
			4000 K	680 lm	68 lm/W	•					5940-H-3-898-XX
	10 W	14°/43°	2700 K	640 lm	64 lm/W				•		5940-H-5-523-XX
			3000 K	640 lm	64 lm/W				•		5940-H-5-897-XX
			4000 K	680 lm	68 lm/W				•		5940-H-5-898-XX
			2700 K	640 lm	64 lm/W	•					5940-N-3-523-XX
			3000 K	640 lm	64 lm/W	•					5940-N-3-897-XX
			4000 K	680 lm	68 lm/W	•					5940-N-3-898-XX
	14 W	15°	2700 K	640 lm	64 lm/W				•		5940-N-5-523-XX
			3000 K	640 lm	64 lm/W				•		5940-N-5-897-XX
			4000 K	680 lm	68 lm/W				•		5940-N-5-898-XX
			2700 K	1220 lm	87 lm/W	•					5940-A-3-567-XX
			3000 K	1220 lm	87 lm/W	•					5940-A-3-569-XX
			4000 K	1300 lm	92 lm/W	•					5940-A-3-571-XX
	14 W	25°	2700 K	1220 lm	87 lm/W				•		5940-A-5-567-XX
			3000 K	1220 lm	87 lm/W				•		5940-A-5-569-XX
			4000 K	1300 lm	92 lm/W				•		5940-A-5-571-XX
			2700 K	1160 lm	82 lm/W	•					5940-B-3-567-XX
			3000 K	1160 lm	82 lm/W	•					5940-B-3-569-XX
			4000 K	1240 lm	88 lm/W	•					5940-B-3-571-XX
	14 W	46°	2700 K	1160 lm	82 lm/W				•		5940-B-5-567-XX
			3000 K	1160 lm	82 lm/W				•		5940-B-5-569-XX
			4000 K	1240 lm	88 lm/W				•		5940-B-5-571-XX
			2700 K	1100 lm	78 lm/W	•					5940-C-3-567-XX
			3000 K	1100 lm	78 lm/W	•					5940-C-3-569-XX
			4000 K	1180 lm	84 lm/W	•					5940-C-3-571-XX
	14 W	43°/14°	2700 K	1100 lm	78 lm/W				•		5940-C-5-567-XX
			3000 K	1100 lm	78 lm/W				•		5940-C-5-569-XX
			4000 K	1180 lm	84 lm/W				•		5940-C-5-571-XX
			2700 K	1130 lm	80 lm/W	•					5940-H-3-567-XX
			3000 K	1130 lm	80 lm/W	•					5940-H-3-569-XX
			4000 K	1210 lm	86 lm/W	•					5940-H-3-571-XX

*Please contact sales team for special request.

Mini Slim KUBIK

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller					Ordering Code
										REMOTE	
OD-5940 	14 W	43°/14°	2700 K	1130 lm	80 lm/W				•		5940-H-5-567-XX
			3000 K	1130 lm	80 lm/W				•		5940-H-5-569-XX
			4000 K	1210 lm	86 lm/W				•		5940-H-5-571-XX
		14°/43°	2700 K	1150 lm	82 lm/W	•					5940-N-3-567-XX
			3000 K	1150 lm	82 lm/W	•					5940-N-3-569-XX
			4000 K	1230 lm	87 lm/W	•					5940-N-3-571-XX
		14°/43°	2700 K	1150 lm	82 lm/W				•		5940-N-5-567-XX
			3000 K	1150 lm	82 lm/W				•		5940-N-5-569-XX
			4000 K	1230 lm	87 lm/W				•		5940-N-5-571-XX
			4000 K	1230 lm	87 lm/W				•		5940-N-5-571-XX
OD-5941  CC  CVDA	8.1 W	12°	2700 K	860 lm	106 lm/W		•				5941-A-7-586-XX
			2700 K	780 lm	96 lm/W		•				5941-B-7-586-XX
			3000 K	720 lm	88 lm/W		•				5941-C-7-587-XX
	8.4 W	43°/16°	2700 K	220 lm	26 lm/W		•				5941-P-7-797-XX
			3000 K	220 lm	26 lm/W		•				5941-P-7-798-XX
			4000 K	230 lm	27 lm/W		•				5941-P-7-799-XX
		16°/43°	2700 K	220 lm	26 lm/W		•				5941-Q-7-797-XX
			3000 K	220 lm	26 lm/W		•				5941-Q-7-798-XX
			4000 K	230 lm	27 lm/W		•				5941-Q-7-799-XX
	9.8 W	12°	2700 K	860 lm	87 lm/W	•					5941-A-3-531-XX
			3000 K	860 lm	87 lm/W	•					5941-A-3-532-XX
		25°	2700 K	780 lm	79 lm/W	•					5941-B-3-531-XX
			3000 K	780 lm	79 lm/W	•					5941-B-3-532-XX
		46°	4000 K	830 lm	84 lm/W	•					5941-B-3-533-XX
			2700 K	720 lm	73 lm/W	•					5941-C-3-531-XX
		43°/16°	3000 K	720 lm	73 lm/W	•					5941-C-3-532-XX
			2700 K	680 lm	69 lm/W	•					5941-H-3-531-XX
	10 W	16°/43°	3000 K	680 lm	69 lm/W	•					5941-H-3-532-XX
			4000 K	680 lm	69 lm/W	•					5941-N-3-532-XX
		43°/16°	2700 K	220 lm	22 lm/W	•					5941-P-3-646-XX
			3000 K	220 lm	22 lm/W	•					5941-P-3-647-XX
		16°/43°	4000 K	230 lm	23 lm/W	•					5941-P-3-648-XX
			2700 K	220 lm	22 lm/W	•					5941-Q-3-646-XX
	13 W	12°	3000 K	220 lm	22 lm/W	•					5941-Q-3-647-XX
			4000 K	230 lm	23 lm/W	•					5941-Q-3-648-XX
			2700 K	1200 lm	92 lm/W		•			•	5941-A-2-528-XX
	13 W	25°	2700 K	1200 lm	92 lm/W		•				5941-A-7-583-XX
			3000 K	1200 lm	92 lm/W		•				5941-A-7-584-XX
			4000 K	1200 lm	92 lm/W		•				5941-B-2-529-XX
		46°	3000 K	1080 lm	83 lm/W		•			•	5941-B-7-584-XX
			3000 K	1080 lm	83 lm/W		•			•	5941-C-2-529-XX
			4000 K	1080 lm	83 lm/W		•			•	5941-C-2-530-XX
	13 W	43°/16°	3000 K	1000 lm	76 lm/W		•				5941-C-7-584-XX
			3000 K	940 lm	72 lm/W					•	5941-H-2-529-XX
			4000 K	940 lm	72 lm/W					•	5941-N-2-529-XX
	13 W	16°/43°	2700 K	1020 lm	78 lm/W		•			•	5941-N-2-530-XX
			4000 K	1020 lm	78 lm/W		•			•	5941-N-7-583-XX
			2700 K	940 lm	72 lm/W					•	5941-P-2-630-XX
		43°/16°	3000 K	310 lm	23 lm/W					•	5941-P-2-644-XX
			4000 K	330 lm	25 lm/W					•	5941-P-2-645-XX
			2700 K	310 lm	23 lm/W		•				5941-P-7-759-XX
	13 W	16°/43°	3000 K	310 lm	23 lm/W		•				5941-P-7-760-XX
			4000 K	330 lm	25 lm/W		•				5941-P-7-796-XX
			2700 K	310 lm	23 lm/W					•	5941-Q-2-630-XX
		43°/16°	3000 K	310 lm	23 lm/W					•	5941-Q-2-644-XX
			4000 K	330 lm	25 lm/W					•	5941-Q-2-645-XX
			2700 K	310 lm	23 lm/W		•				5941-Q-7-759-XX
	14 W	20°	3000 K	310 lm	23 lm/W		•				5941-Q-7-760-XX
			4000 K	330 lm	25 lm/W		•				5941-Q-7-796-XX
			2700 K	1540 lm	110 lm/W	•					5941-B-3-503-XX
		35°	3000 K	1540 lm	110 lm/W	•					5941-B-3-901-XX
			4000 K	1620 lm	115 lm/W	•					5941-B-3-904-XX
			2700 K	1700 lm	121 lm/W	•					5941-C-3-503-XX
	14 W	58°	3000 K	1580 lm	112 lm/W	•					5941-C-3-901-XX
			4000 K	1660 lm	118 lm/W	•					5941-C-3-904-XX
			2700 K	1740 lm	124 lm/W	•					5941-D-3-503-XX
		23°	3000 K	1470 lm	105 lm/W	•					5941-D-3-901-XX
			4000 K	1550 lm	110 lm/W	•					5941-D-3-904-XX
			2700 K	1620 lm	115 lm/W	•					5941-O-3-920-XX
OD-5942  CC [DMX]	24 W	25°	RGBW	1420 lm	59 lm/W					•	5942-B-2-686-XX
			RGBW	1420 lm	59 lm/W					•	5942-B-E-686-XX
		46°	RGBW	1440 lm	60 lm/W					•	5942-C-2-686-XX
			RGBW	1440 lm	60 lm/W					•	5942-C-E-686-XX
		46°/20°	RGBW	1510 lm	62 lm/W					•	5942-H-2-686-XX
			RGBW	1510 lm	62 lm/W					•	5942-H-E-686-XX
	40 W	20°/46°	RGBW	1510 lm	62 lm/W					•	5942-N-2-686-XX
			RGBW	1510 lm	62 lm/W					•	5942-N-E-686-XX
			3000 K	4410 lm	110 lm/W	•					5942-5-3-902-XX
			4000 K	4520 lm	113 lm/W	•					5942-5-3-905-XX
		23°	3000 K	4410 lm	110 lm/W			•			5942-5-4-902-XX
			3000 K	4210 lm	105 lm/W	•					5942-6-3-902-XX
			3000 K	4210 lm	105 lm/W			•			5942-6-4-902-XX
			3000 K	4210 lm	105 lm/W			•			5942-6-4-902-XX

KUBIK

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller					Ordering Code		
											REMOTE			
KUBIK	OD-5942		40 W	48°	3000 K	3740 lm	93 lm/W	•					5942-7-3-902-XX	
	4000 K				3840 lm	96 lm/W	•				5942-7-3-905-XX			
	3000 K				3740 lm	93 lm/W			•		5942-7-4-902-XX			
	3000 K				3740 lm	93 lm/W				•	5942-7-5-902-XX			
	43 W	12°		3000 K	3860 lm	89 lm/W	•					5942-A-3-535-XX		
				2700 K	3860 lm	89 lm/W			•		5942-A-4-534-XX			
				3000 K	3860 lm	89 lm/W			•		5942-A-4-535-XX			
				2700 K	3860 lm	89 lm/W				•	5942-A-5-534-XX			
	43 W	25°		3000 K	3600 lm	83 lm/W	•					5942-B-3-535-XX		
				4000 K	3850 lm	89 lm/W	•				5942-B-3-536-XX			
				2700 K	3630 lm	84 lm/W	•				5942-C-3-534-XX			
				3000 K	3630 lm	84 lm/W	•				5942-C-3-535-XX			
	43 W	46°		4000 K	3890 lm	90 lm/W	•					5942-C-3-536-XX		
				2700 K	3630 lm	84 lm/W				•	5942-C-5-534-XX			
				4000 K	3890 lm	90 lm/W				•	5942-C-5-536-XX			
				3000 K	3070 lm	71 lm/W	•				5942-H-3-535-XX			
	43 W	46°/20°		3000 K	3070 lm	71 lm/W			•			5942-H-4-535-XX		
				3000 K	3070 lm	71 lm/W	•				5942-N-3-535-XX			
		20°/46°		3000 K	3070 lm	71 lm/W						5942-N-4-535-XX		
				3000 K	3070 lm	71 lm/W			•					
Micro KUBIK	OD-5948		3.3 W	CV	12°	2700 K	280 lm	84 lm/W					•	5948-A-2-561-XX
	3000 K					280 lm	84 lm/W					•	5948-A-2-562-XX	
	25°				2700 K	230 lm	69 lm/W					•	5948-B-2-561-XX	
					3000 K	230 lm	69 lm/W					•	5948-B-2-562-XX	
	46°	2700 K	220 lm	66 lm/W					•	5948-C-2-561-XX				
		3000 K	220 lm	66 lm/W					•	5948-C-2-562-XX				
	OD-5949		3.9 W	CC	12°	2700 K	310 lm	79 lm/W					•	5949-A-2-561-XX
	3000 K					310 lm	79 lm/W					•	5949-A-2-562-XX	
	25°				3000 K	260 lm	66 lm/W					•	5949-B-2-562-XX	
					3000 K	250 lm	64 lm/W					•	5949-C-2-562-XX	



Courtyard by Marriott, Aravali resort, NCR, Delhi – INDIA

■ PROJECTOR



Medium **CETUS**
Without Base



Medium **CETUS**
U Bracket

NEW!

Medium **CETUS**

CETUS is the next generation circular shaped projector designed for strict energy efficiency requirements as well as modular and versatile use cases. The control gear lifetime is extended by thermal isolation from the light source. The optional built in surge protection device reinforces **CETUS** ability to withstand toughest ambient conditions.

CETUS is equipped with the UniBlockDelta-P-Guard to rapidly equalize pressure potential in case of rapidly changing ambient conditions. Ultra-tough silica-boron trioxide glass is used for superior chemical resistance and class leading IK09 impact resistance. The Unilamp modular solutions system allows adoption of **CETUS** to any type of installation requirement even years after delivery.

Circular economy assessment according to CIBSE TM66 is available on request.



Mega **CETUS**
Without Base



Mega **CETUS**
U Bracket

NEW!

Mega **CETUS**



www.unilamp.co.th/en/p/cetus


Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 Die cast aluminum body and components.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- GFR PA6.6 terminal block.
- Installation must be carried out according to the enclosed product manual.

Available Color




****Custom colors are available on request.**

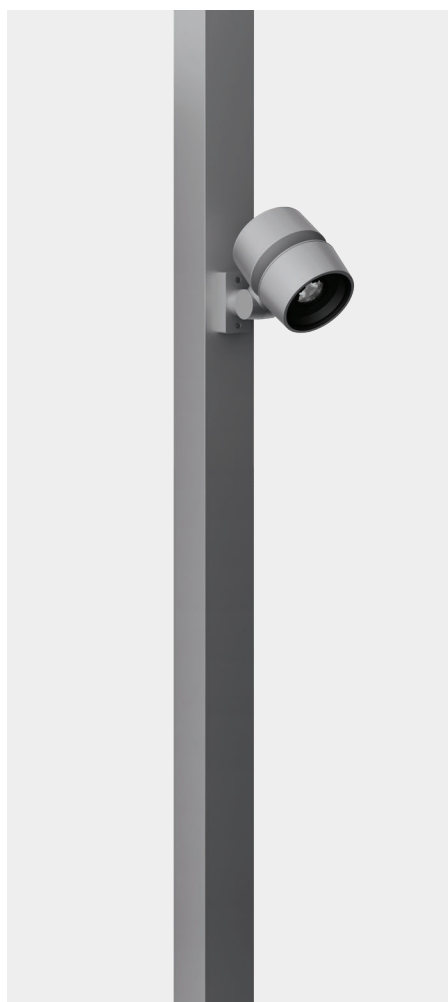


CETUS + Accessory kit
for pole attached solutions




CETUS + Accessory kit
for ground mount solutions

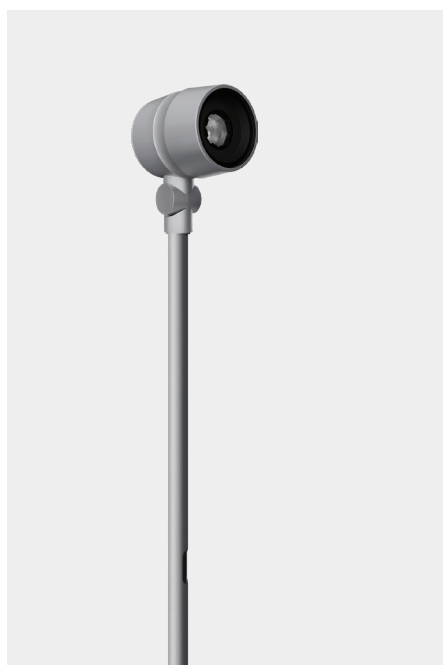


CETUS + Accessory kit
for ground mount solutions

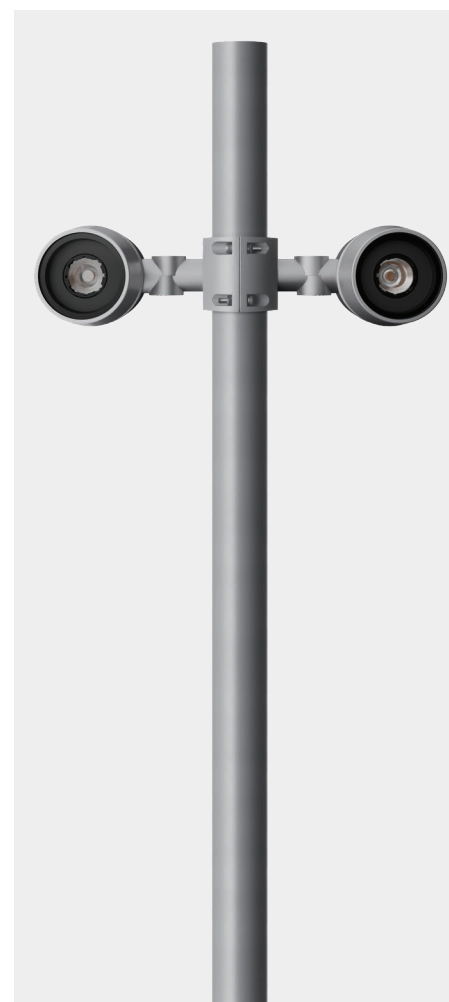


CETUS + Accessory kit
for pole mount solutions

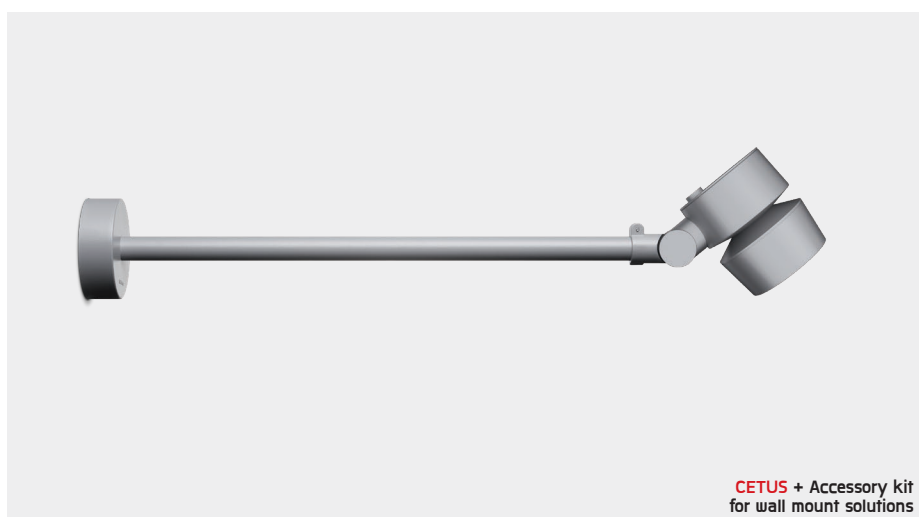

CETUS + Accessory kit
for wall mount solutions

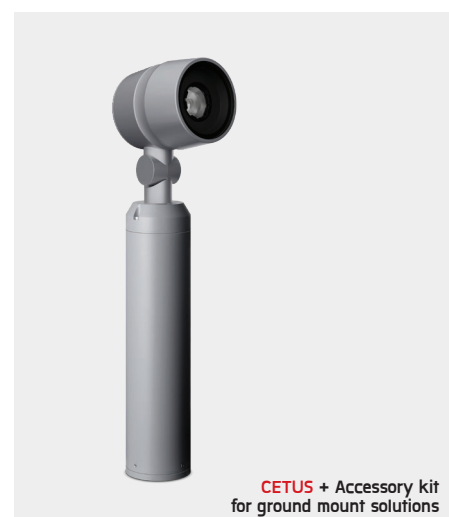

CETUS + Accessory kit
for ground mount solutions

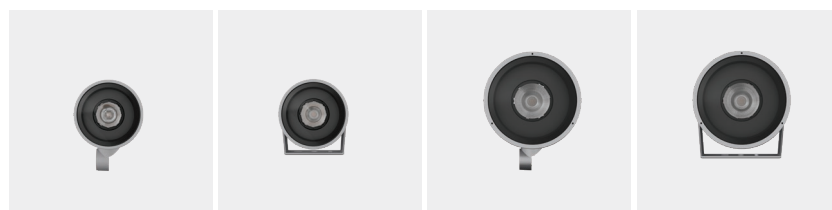

Medium CETUS Mega CETUS


Accessory		Without Base	U Bracket	Without Base	U Bracket
	Honeycomb louver, COB, pre-assembly from factory	•	•	•	•
	Glare shield cap, pre-assembly from factory	•	•	•	•
	Snoot, pre-assembly from factory	•	•	•	•
	Mounting base, rotateable, On-Off, pre-assembly from factory	•	–	•	–
	Mounting base, rotateable, 1-10V or DALI, pre-assembly from factory	•	–	•	–
	Outrigger arm, L= 740mm, On-Off / 1-10V or DALI pre-assembly from factory	•	–	•	–
	Earth spike, L= 900mm, aluminum, On-Off / 1-10V or DALI pre-assembly from factory	•	–	•	–
	Earth spike, L= 1390-1760mm, aluminum, On-Off / 1-10V or DALI, length adjustable pre-assembly from factory	•	–	•	–
	Cylindrical aluminum pole, diameter 105mm, H= 522mm, On-Off / 1-10V / DALI pre-assembled from factory	•	–	•	–
	Pole mounting arm, for 1-3 projector	•	–	•	–
	Pole mount adaptor, pole diameter 60mm, On-Off / 1-10V or DALI pre-assembly from factory	•	–	•	–
	Pole mount adaptor, pole diameter 76mm, On-Off / 1-10V or DALI pre-assembly from factory	•	–	•	–
	Pole mount adaptor, pole diameter 102-105mm, On-Off / 1-10V or DALI pre-assembly from factory	•	–	•	–
	Pole mount adaptor, rectangular pole, On-Off / 1-10V or DALI pre-assembly from factory	•	–	•	–

• MODULAR SOLUTIONS

			
Medium CETUS		Mega CETUS	
Without Base	U Bracket	Without Base	U Bracket


Accessory		Without Base	U Bracket	Without Base	U Bracket
	Pole clamp, pole diameter 60-76mm, for wall or pole mounting arm	•	–	•	–
	Pole clamp, pole diameter 102-105mm, for wall or pole mounting arm	•	–	•	–
	Pole clamp, pole diameter 60-76mm, single side luminaire mounting , On-Off / 1-10V or DALI, pre-assembly from factory	•	–	•	–
	Pole clamp, pole diameter 102-105mm, single side luminaire mounting , On-Off / 1-10V or DALI, pre-assembly from factory	•	–	•	–
	Pole clamp, pole diameter 60-76mm, double sided luminaire mounting , On-Off / 1-10V or DALI, pre-assembly from factory	•	–	•	–
	Pole clamp, pole diameter 102-105mm, double sided luminaire mounting , On-Off / 1-10V or DALI, pre-assembly from factory	•	–	•	–
	Cylindrical aluminum pole, diameter 105mm, H= 3500mm / 4000mm, with cable outlets and top cap	•	–	•	–
	Cylindrical hot-dip galvanized steel pole, diameter 102mm, H= 4000mm / 5000mm, with cable outlets and top cap	•	–	•	–

• MODULAR SOLUTIONS


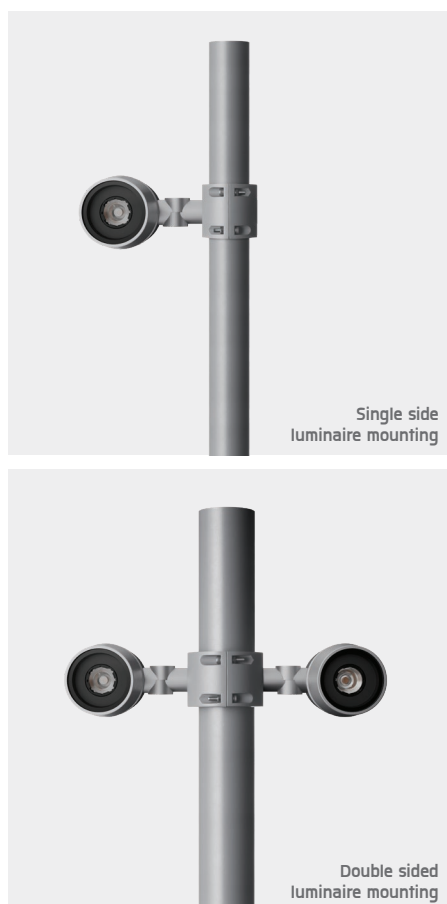


*Please see Poles & Anchor bolt section for pole mounting options

■ CETUS + Accessory kit for pole mount solutions

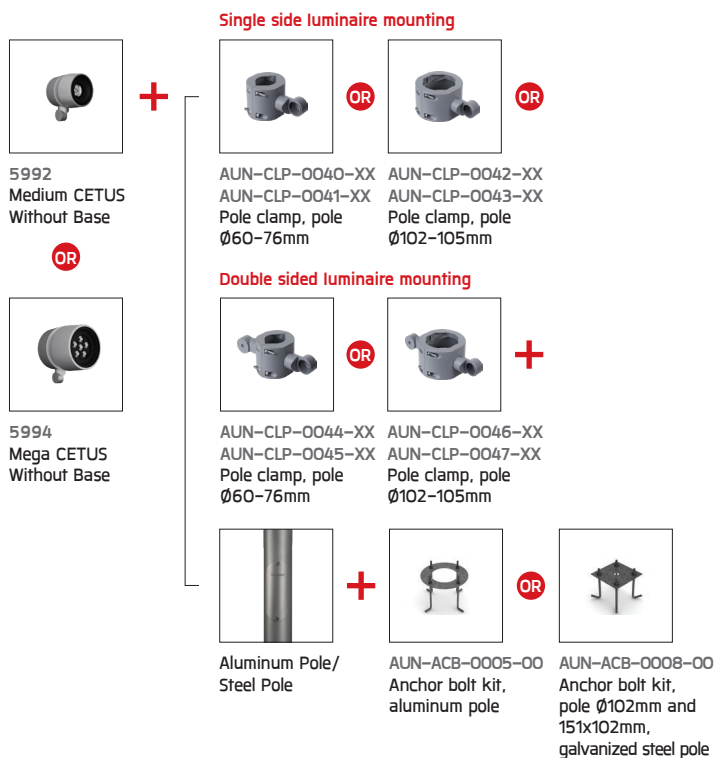





■ CETUS + Accessory kit for pole attached solutions

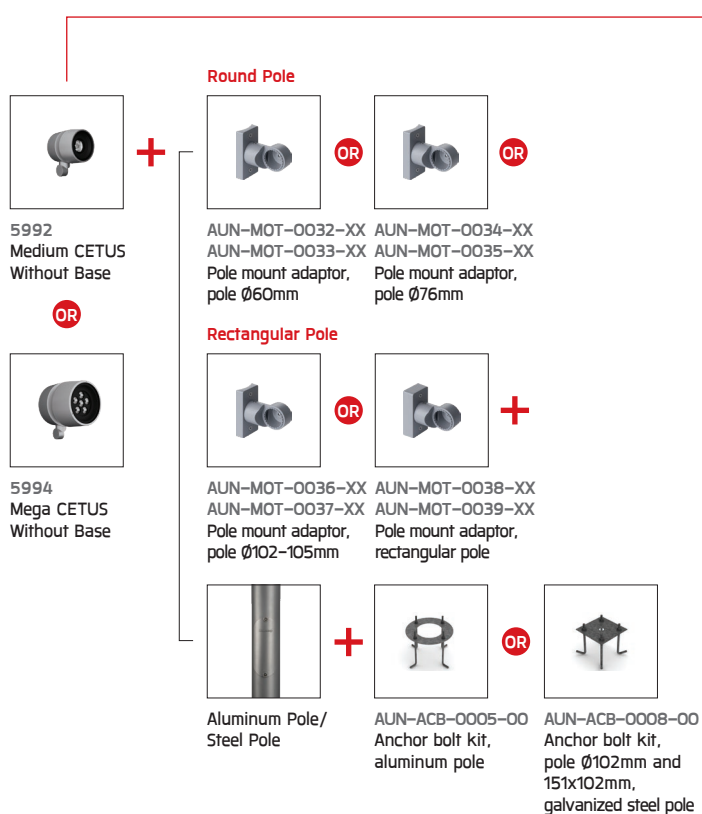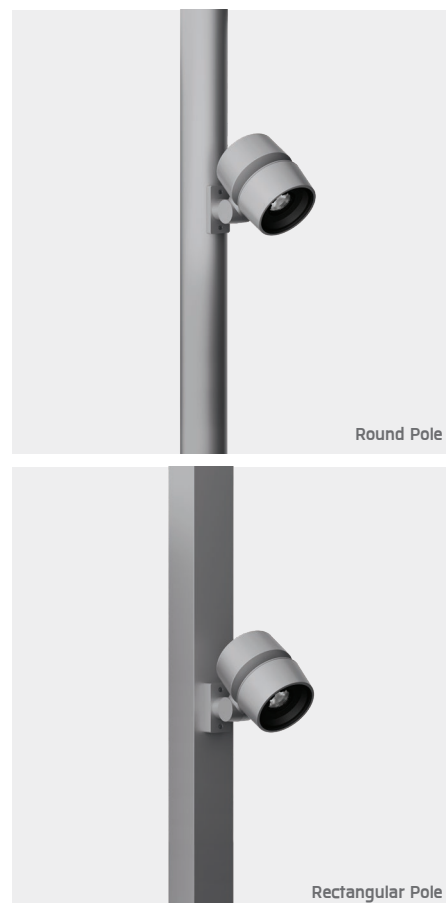


*Please see Poles & Anchor bolt section for pole mounting options

• MODULAR SOLUTIONS


▪ CETUS + Accessory kit for pole mount solutions

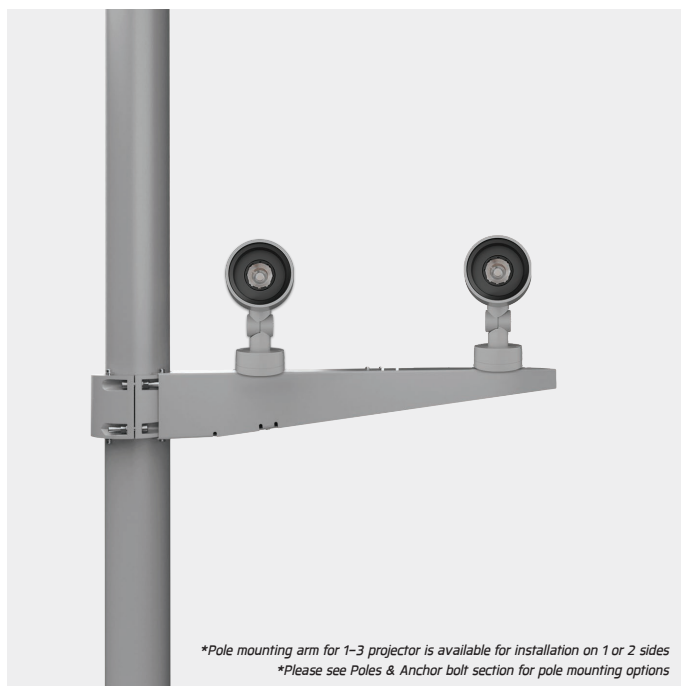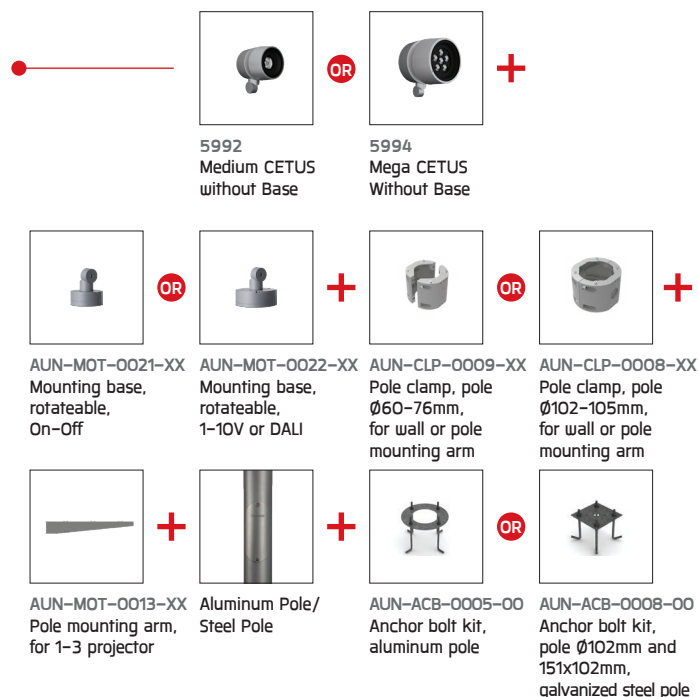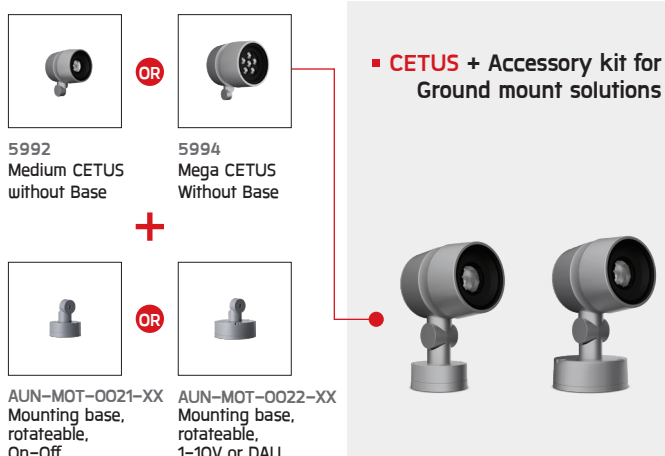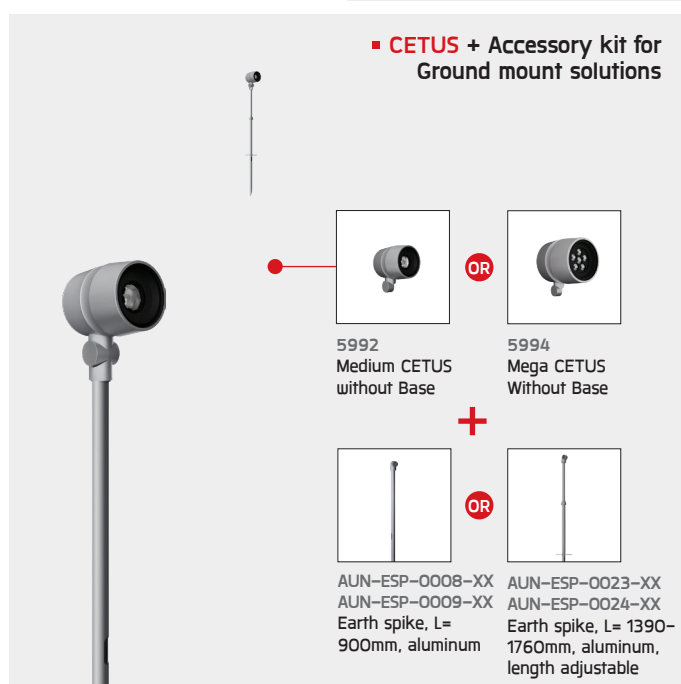

▪ CETUS + Accessory kit for Wall mount solutions

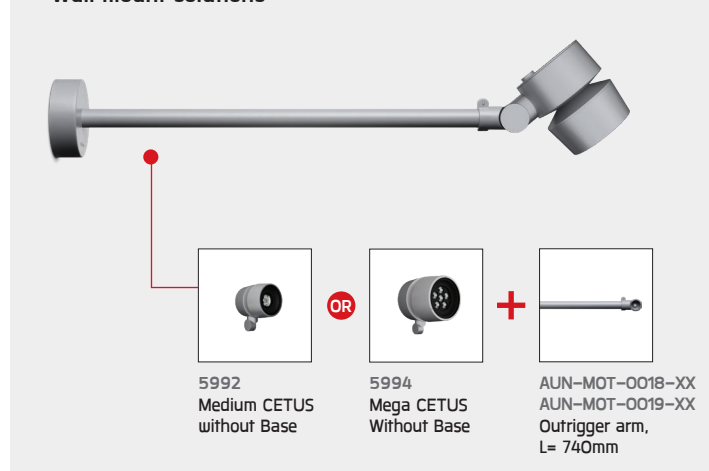


▪ CETUS + Accessory kit for Ground mount solutions

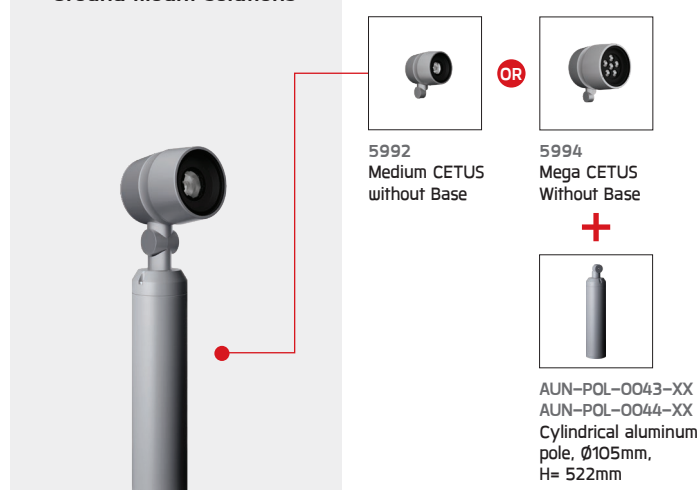


CETUS



Medium CETUS – Without Base **NEW!**

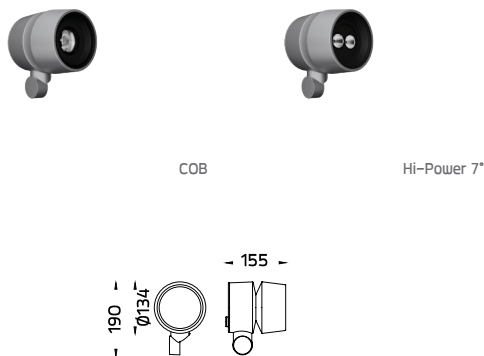

Mega CETUS – Without Base **NEW!**

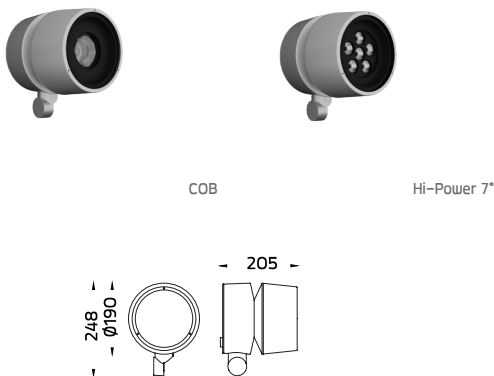

Medium CETUS

Application Type : Projector
Subgroup : Circular

Medium CETUS – Without Base / 5992	
Luminaire Performance	
260 – 2420 lm	
5 – 21 W	
52 – 115 lm/W	
Beam Options	
Narrow	Medium
Wide	
Color Temperature	
2700K/ 3000K/ 4000K	
Controller	
On-Off/ DALI	
Input Options	
220-240Vac 50/60Hz	

Mega CETUS

Application Type : Projector
Subgroup : Circular

Mega CETUS – Without Base / 5994	
Luminaire Performance	
1060 – 5850 lm	
15 – 49 W	
67 – 119 lm/W	
Beam Options	
Narrow	Medium
Wide	
Color Temperature	
2700K/ 3000K/ 4000K	
Controller	
On-Off/ DALI	
Input Options	
220-240Vac 50/60Hz	

Accessories

	Honey comb louver		Glare shield Cap		Snoot		Tree strap		Earth spike		Mounthing base
	Pole clamp		Pole mount adaptor		Mounting arm		Outrigger arm		Short pole		Anchor bolt
	Aluminum pole		Steel pole		IP68 Connector		Surge protection				

*Please see Poles & Anchor bolt section for pole mounting options




Medium CETUS – U Bracket NEW!



COB



Hi-Power 7*




Mega CETUS – U Bracket NEW!



COB



Hi-Power 7*



Medium CETUS

Application Type : Projector
Subgroup : Circular

Medium CETUS – U Bracket / 5997

Luminaire Performance

260 – 2420 lm

5 – 21 W

52 – 115 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

On-Off/ DALI

Input Options

220–240Vac 50/60Hz

Mega CETUS

Application Type : Projector
Subgroup : Circular

Medium CETUS – U Bracket / 5999

Luminaire Performance

1060 – 5850 lm

15 – 49 W

67 – 119 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

On-Off/ DALI

Input Options

220–240Vac 50/60Hz

Accessories



Honey comb
louver



Glare shield
Cap



Snoot



IP68
Connector



Surge protection

Medium CETUS – Without Base

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller		Ordering Code
								
OD-5992  Hi Power 7°	5 W	7°	3000 K 3000 K	260 lm 260 lm	52 lm/W 52 lm/W	•	•	5992-4-3-227-XX 5992-4-5-227-XX
	8 W	7°	3000 K 3000 K	420 lm 420 lm	52 lm/W 52 lm/W	•	•	5992-4-3-293-XX 5992-4-5-293-XX
OD-5992  COB	11 W	27°	2700 K	1040 lm	94 lm/W	•		5992-B-3-506-XX
			3000 K	1100 lm	100 lm/W	•		5992-B-3-887-XX
			4000 K	1160 lm	105 lm/W	•		5992-B-3-891-XX
			2700 K	1040 lm	94 lm/W		•	5992-B-5-506-XX
			3000 K	1100 lm	100 lm/W		•	5992-B-5-887-XX
			4000 K	1160 lm	105 lm/W		•	5992-B-5-891-XX
	11 W	38°	2700 K	1120 lm	101 lm/W	•		5992-C-3-506-XX
			3000 K	1180 lm	107 lm/W	•		5992-C-3-887-XX
			4000 K	1240 lm	112 lm/W	•		5992-C-3-891-XX
			2700 K	1120 lm	101 lm/W		•	5992-C-5-506-XX
			3000 K	1180 lm	107 lm/W		•	5992-C-5-887-XX
			4000 K	1240 lm	112 lm/W		•	5992-C-5-891-XX
	11 W	49°	2700 K	1120 lm	101 lm/W	•		5992-D-3-506-XX
			3000 K	1170 lm	106 lm/W	•		5992-D-3-887-XX
			4000 K	1240 lm	112 lm/W	•		5992-D-3-891-XX
			2700 K	1120 lm	101 lm/W		•	5992-D-5-506-XX
			3000 K	1170 lm	106 lm/W		•	5992-D-5-887-XX
			4000 K	1240 lm	112 lm/W		•	5992-D-5-891-XX
	21 W	27°	2700 K	2040 lm	97 lm/W	•		5992-B-3-505-XX
			3000 K	2150 lm	102 lm/W	•		5992-B-3-902-XX
			4000 K	2250 lm	107 lm/W	•		5992-B-3-905-XX
			2700 K	2040 lm	97 lm/W		•	5992-B-5-505-XX
			3000 K	2150 lm	102 lm/W		•	5992-B-5-902-XX
			4000 K	2250 lm	107 lm/W		•	5992-B-5-905-XX
	21 W	38°	2700 K	2190 lm	104 lm/W	•		5992-C-3-505-XX
			3000 K	2310 lm	110 lm/W	•		5992-C-3-902-XX
			4000 K	2420 lm	115 lm/W	•		5992-C-3-905-XX
			2700 K	2190 lm	104 lm/W		•	5992-C-5-505-XX
			3000 K	2310 lm	110 lm/W		•	5992-C-5-902-XX
			4000 K	2420 lm	115 lm/W		•	5992-C-5-905-XX
	21 W	49°	2700 K	2180 lm	103 lm/W	•		5992-D-3-505-XX
			3000 K	2300 lm	109 lm/W	•		5992-D-3-902-XX
			4000 K	2410 lm	114 lm/W	•		5992-D-3-905-XX
			2700 K	2180 lm	103 lm/W		•	5992-D-5-505-XX
			3000 K	2300 lm	109 lm/W		•	5992-D-5-902-XX
			4000 K	2410 lm	114 lm/W		•	5992-D-5-905-XX
OD-5997  Hi Power 7°	5 W	7°	3000 K 3000 K	260 lm 260 lm	52 lm/W 52 lm/W	•	•	5997-4-3-227-XX 5997-4-5-227-XX
	8 W	7°	3000 K 3000 K	420 lm 420 lm	52 lm/W 52 lm/W	•	•	5997-4-3-293-XX 5997-4-5-293-XX
OD-5997  COB	11 W	27°	2700 K	1040 lm	94 lm/W	•		5997-B-3-506-XX
			3000 K	1100 lm	100 lm/W	•		5997-B-3-887-XX
			4000 K	1160 lm	105 lm/W	•		5997-B-3-891-XX
			2700 K	1040 lm	94 lm/W		•	5997-B-5-506-XX
			3000 K	1100 lm	100 lm/W		•	5997-B-5-887-XX
			4000 K	1160 lm	105 lm/W		•	5997-B-5-891-XX
	11 W	38°	2700 K	1120 lm	101 lm/W	•		5997-C-3-506-XX
			3000 K	1180 lm	107 lm/W	•		5997-C-3-887-XX
			4000 K	1240 lm	112 lm/W	•		5997-C-3-891-XX
			2700 K	1120 lm	101 lm/W		•	5997-C-5-506-XX
			3000 K	1180 lm	107 lm/W		•	5997-C-5-887-XX
			4000 K	1240 lm	112 lm/W		•	5997-C-5-891-XX
	11 W	49°	2700 K	1120 lm	101 lm/W	•		5997-D-3-506-XX
			3000 K	1170 lm	106 lm/W	•		5997-D-3-887-XX
			4000 K	1240 lm	112 lm/W	•		5997-D-3-891-XX
			2700 K	1120 lm	101 lm/W		•	5997-D-5-506-XX
			3000 K	1170 lm	106 lm/W		•	5997-D-5-887-XX
			4000 K	1240 lm	112 lm/W		•	5997-D-5-891-XX

*Please contact sales team for special request.

Medium CETUS – U Bracket

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller		Ordering Code
								
OD-5997  COB	21 W	27°	2700 K	2040 lm	97 lm/W	•		5997-B-3-505-XX
			3000 K	2150 lm	102 lm/W	•		5997-B-3-902-XX
			4000 K	2250 lm	107 lm/W	•		5997-B-3-905-XX
	21 W	38°	2700 K	2040 lm	97 lm/W		•	5997-B-5-505-XX
			3000 K	2150 lm	102 lm/W		•	5997-B-5-902-XX
			4000 K	2250 lm	107 lm/W		•	5997-B-5-905-XX
	21 W	49°	2700 K	2190 lm	104 lm/W	•		5997-C-3-505-XX
			3000 K	2310 lm	110 lm/W	•		5997-C-3-902-XX
			4000 K	2420 lm	115 lm/W	•		5997-C-3-905-XX
	21 W	49°	2700 K	2190 lm	104 lm/W		•	5997-C-5-505-XX
			3000 K	2310 lm	110 lm/W		•	5997-C-5-902-XX
			4000 K	2420 lm	115 lm/W		•	5997-C-5-905-XX

Mega CETUS – Without Base

OD-5994  Hi Power 7°	15 W	7°	3000 K	1060 lm	70 lm/W	•		5994-4-3-289-XX
			3000 K	1060 lm	70 lm/W		•	5994-4-5-289-XX
	19 W	7°	3000 K	1280 lm	67 lm/W	•		5994-4-3-286-XX
			3000 K	1280 lm	67 lm/W		•	5994-4-5-286-XX
OD-5994  COB	36 W	24°	2700 K	3660 lm	101 lm/W	•		5994-B-3-506-XX
			3000 K	3850 lm	106 lm/W	•		5994-B-3-887-XX
			4000 K	4000 lm	111 lm/W	•		5994-B-3-891-XX
	36 W	33°	2700 K	3660 lm	101 lm/W		•	5994-B-5-506-XX
			3000 K	3850 lm	106 lm/W		•	5994-B-5-887-XX
			4000 K	4000 lm	111 lm/W		•	5994-B-5-891-XX
	36 W	55°	2700 K	3410 lm	94 lm/W	•		5994-C-3-506-XX
			3000 K	3590 lm	99 lm/W	•		5994-C-3-887-XX
			4000 K	3720 lm	103 lm/W	•		5994-C-3-891-XX
	36 W	87°	2700 K	3410 lm	94 lm/W		•	5994-C-5-506-XX
			3000 K	3590 lm	99 lm/W		•	5994-C-5-887-XX
			4000 K	3720 lm	103 lm/W		•	5994-C-5-891-XX
	49 W	24°	2700 K	3190 lm	88 lm/W	•		5994-D-3-506-XX
			3000 K	3360 lm	93 lm/W	•		5994-D-3-887-XX
			4000 K	3480 lm	96 lm/W	•		5994-D-3-891-XX
	49 W	33°	2700 K	3190 lm	88 lm/W		•	5994-D-5-506-XX
			3000 K	3360 lm	93 lm/W		•	5994-D-5-887-XX
			4000 K	3480 lm	96 lm/W		•	5994-D-5-891-XX
	49 W	55°	2700 K	3390 lm	94 lm/W	•		5994-E-3-506-XX
			3000 K	3570 lm	99 lm/W	•		5994-E-3-887-XX
			4000 K	3700 lm	102 lm/W	•		5994-E-3-891-XX
	49 W	87°	2700 K	3390 lm	94 lm/W		•	5994-E-5-506-XX
			3000 K	3570 lm	99 lm/W		•	5994-E-5-887-XX
			4000 K	3700 lm	102 lm/W		•	5994-E-5-891-XX
	49 W	24°	2700 K	5350 lm	109 lm/W	•		5994-B-3-505-XX
			3000 K	5650 lm	115 lm/W	•		5994-B-3-902-XX
			4000 K	5850 lm	119 lm/W	•		5994-B-3-905-XX
	49 W	33°	2700 K	5350 lm	109 lm/W		•	5994-B-5-505-XX
			3000 K	5650 lm	115 lm/W		•	5994-B-5-902-XX
			4000 K	5850 lm	119 lm/W		•	5994-B-5-905-XX
	49 W	55°	2700 K	4980 lm	101 lm/W	•		5994-C-3-505-XX
			3000 K	5260 lm	107 lm/W	•		5994-C-3-902-XX
			4000 K	5440 lm	111 lm/W	•		5994-C-3-905-XX
	49 W	87°	2700 K	4980 lm	101 lm/W		•	5994-C-5-505-XX
			3000 K	5260 lm	107 lm/W		•	5994-C-5-902-XX
			4000 K	5440 lm	111 lm/W		•	5994-C-5-905-XX
	49 W	24°	2700 K	4660 lm	95 lm/W	•		5994-D-3-505-XX
			3000 K	4920 lm	100 lm/W	•		5994-D-3-902-XX
			4000 K	5090 lm	103 lm/W	•		5994-D-3-905-XX
	49 W	33°	2700 K	4660 lm	95 lm/W		•	5994-D-5-505-XX
			3000 K	4920 lm	100 lm/W		•	5994-D-5-902-XX
			4000 K	5090 lm	103 lm/W		•	5994-D-5-905-XX
	49 W	55°	2700 K	4950 lm	101 lm/W	•		5994-E-3-505-XX
			3000 K	5230 lm	106 lm/W	•		5994-E-3-902-XX
			4000 K	5410 lm	110 lm/W	•		5994-E-3-905-XX
	49 W	87°	2700 K	4950 lm	101 lm/W		•	5994-E-5-505-XX
			3000 K	5230 lm	106 lm/W		•	5994-E-5-902-XX
			4000 K	5410 lm	110 lm/W		•	5994-E-5-905-XX

Mega CETUS – U Bracket

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller		Ordering Code
								
OD-5999  Hi Power 7°	15 W	7°	3000 K 3000 K	1060 lm 1060 lm	70 lm/W 70 lm/W	•	•	5999-4-3-289-XX 5999-4-5-289-XX
	19 W	7°	3000 K 3000 K	1280 lm 1280 lm	67 lm/W 67 lm/W	•	•	5999-4-3-286-XX 5999-4-5-286-XX
OD-5999  COB	36 W	24°	2700 K 3000 K 4000 K	3660 lm 3850 lm 4000 lm	101 lm/W 106 lm/W 111 lm/W	• • •		5999-B-3-506-XX 5999-B-3-887-XX 5999-B-3-891-XX
			2700 K 3000 K 4000 K	3660 lm 3850 lm 4000 lm	101 lm/W 106 lm/W 111 lm/W		• • •	5999-B-5-506-XX 5999-B-5-887-XX 5999-B-5-891-XX
			2700 K 3000 K 4000 K	3410 lm 3590 lm 3720 lm	94 lm/W 99 lm/W 103 lm/W	• • •		5999-C-3-506-XX 5999-C-3-887-XX 5999-C-3-891-XX
	36 W	33°	2700 K 3000 K 4000 K	3410 lm 3590 lm 3720 lm	94 lm/W 99 lm/W 103 lm/W		• • •	5999-C-5-506-XX 5999-C-5-887-XX 5999-C-5-891-XX
			2700 K 3000 K 4000 K	3190 lm 3360 lm 3480 lm	88 lm/W 93 lm/W 96 lm/W	• • •		5999-D-3-506-XX 5999-D-3-887-XX 5999-D-3-891-XX
			2700 K 3000 K 4000 K	3190 lm 3360 lm 3480 lm	88 lm/W 93 lm/W 96 lm/W		• • •	5999-D-5-506-XX 5999-D-5-887-XX 5999-D-5-891-XX
	36 W	87°	2700 K 3000 K 4000 K	3390 lm 3570 lm 3700 lm	94 lm/W 99 lm/W 102 lm/W	• • •		5999-E-3-506-XX 5999-E-3-887-XX 5999-E-3-891-XX
			2700 K 3000 K 4000 K	3390 lm 3570 lm 3700 lm	94 lm/W 99 lm/W 102 lm/W		• • •	5999-E-5-506-XX 5999-E-5-887-XX 5999-E-5-891-XX
			2700 K 3000 K 4000 K	5350 lm 5650 lm 5850 lm	109 lm/W 115 lm/W 119 lm/W	• • •		5999-B-3-505-XX 5999-B-3-902-XX 5999-B-3-905-XX
	49 W	24°	2700 K 3000 K 4000 K	5350 lm 5650 lm 5850 lm	109 lm/W 115 lm/W 119 lm/W		• • •	5999-B-5-505-XX 5999-B-5-902-XX 5999-B-5-905-XX
			2700 K 3000 K 4000 K	4980 lm 5260 lm 5440 lm	101 lm/W 107 lm/W 111 lm/W	• • •		5999-C-3-505-XX 5999-C-3-902-XX 5999-C-3-905-XX
			2700 K 3000 K 4000 K	4980 lm 5260 lm 5440 lm	101 lm/W 107 lm/W 111 lm/W		• • •	5999-C-5-505-XX 5999-C-5-902-XX 5999-C-5-905-XX
	49 W	55°	2700 K 3000 K 4000 K	4660 lm 4920 lm 5090 lm	95 lm/W 100 lm/W 103 lm/W	• • •		5999-D-3-505-XX 5999-D-3-902-XX 5999-D-3-905-XX
			2700 K 3000 K 4000 K	4660 lm 4920 lm 5090 lm	95 lm/W 100 lm/W 103 lm/W		• • •	5999-D-5-505-XX 5999-D-5-902-XX 5999-D-5-905-XX
			2700 K 3000 K 4000 K	4950 lm 5230 lm 5410 lm	101 lm/W 106 lm/W 110 lm/W	• • •		5999-E-3-505-XX 5999-E-3-902-XX 5999-E-3-905-XX
	49 W	87°	2700 K 3000 K 4000 K	4950 lm 5230 lm 5410 lm	101 lm/W 106 lm/W 110 lm/W		• • •	5999-E-5-505-XX 5999-E-5-902-XX 5999-E-5-905-XX





ATHLON

- POLE MOUNTED
- PROJECTOR



ATHLON family is functional mini spotlight/ floodlight/ arealight. The slim and clean design of **ATHLON** allows a hidden installation. **ATHLON** is designed for a streamlined time effective installation. Alanod Miro reflectors used in this luminaire are designed by Photopia high-end lighting engineering software. Tight beam control utilizes selected lenses from world-renowned manufacturers.

ATHLON is available with symmetric, asymmetric, bi-symmetric, elliptical, forward throw and side throw light distributions. The broad range of accessories such as a ground spike, tree strap, softening filter and honey comb louver and glare shield hood makes it a dynamic floodlight choice. The graduated scale provides accuracy of the light distribution on the illuminated surface.

ATHLON is suitable to light up small to medium sized objects or areas such as signage boards, ceiling, building facades, open spaces, parks etc.



www.unilamp.co.th/en/p/athlon



Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum housing.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- GFR PA6.6 terminal block.
- Weather proof TPE grommet.
- Installation must be carried out according to the enclosed product manual.

Available Color



****Custom colors are available on request.**



1. Reflector

High reflection CNC formed Miro reflector.

2. LED

Array of High quality LED from world renowned manufacturer. Module attached directly to the body for fastest heat transfer. 3000K and 4000K CRI>80 3-Step SDCM.

3. Body Housing

Enhanced LM6 die-cast aluminum housing with 16-step coating process including nano ceramic film. Low copper content <0.1%

4. Aiming

Graduated scale with locking mechanism. Adjustable with hexagon tool.

5. Quick Connector

Supplied with detachable connector for easy installation.


ATHLON



ATHLON



OD-2310




ATHLON



OD-2311


ATHLON Arm



ATHLON Optic



OD-2312



ATHLON Optic





OD-2313

ATHLON Optic



OD-2314

ATHLON Optic Arm



ATHLON

Application Type : Projector
Subgroup : Rectangular

ATHLON / 2310

ATHLON / 2311

ATHLON Arm / 2315


Luminaire Performance

1860 – 2910 lm

20 – 29 W

93 – 106 lm/W

Beam Options



Color Temperature

3000K/ 4000K

Controller

On-Off / 1-10V/ DALI

Input Options

220-240Vac 50/60Hz

ATHLON OPTIC

Application Type : Projector
Subgroup : Rectangular

ATHLON Optic / 2312

ATHLON Optic / 2313

ATHLON Optic / 2314

ATHLON Optic Arm / 2317

ATHLON Optic Arm / 2319


Luminaire Performance

1500 – 2360 lm

20 – 28 W

71 – 84 lm/W

Beam Options



Color Temperature

3000K/ 4000K


Controller

On-Off / 1-10V/ DALI

Input Options

220-240Vac 50/60Hz


Accessories

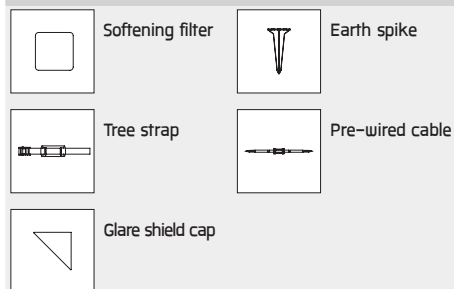





ATHLON / ATHLON Optic

ATHLON - DS / ATHLON Optic - DS

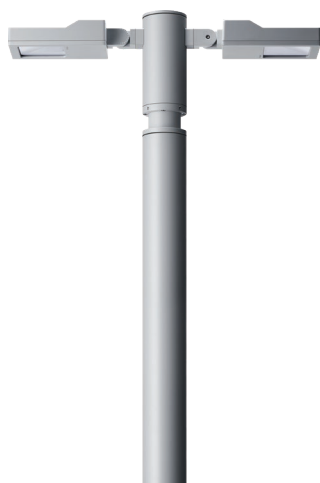

* Pole is not included and has to be ordered separately

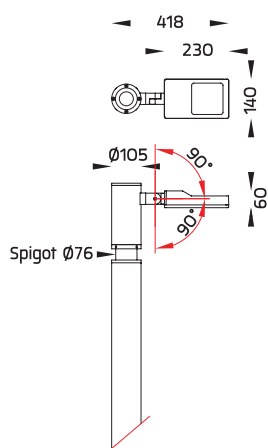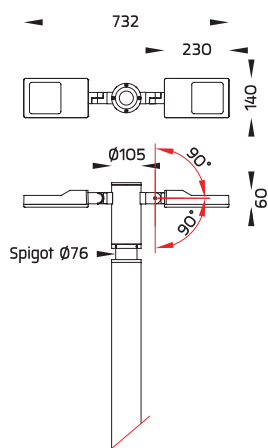

ATHLON Area Light

Application Type : Pole mounted

Subgroup : Urban area / Urban ambient

ATHLON / 7256

ATHLON Optic / 7257

ATHLON - DS / 7258

ATHLON Optic - DS / 7259


Luminaire Performance

2000 - 6420 lm

28 - 58 W

71 - 110 lm/W

Beam Options



Color Temperature

3000K

Controller

On-Off/ 1-10V

Accessories




Aluminum pole



Steel pole



Anchor bolt

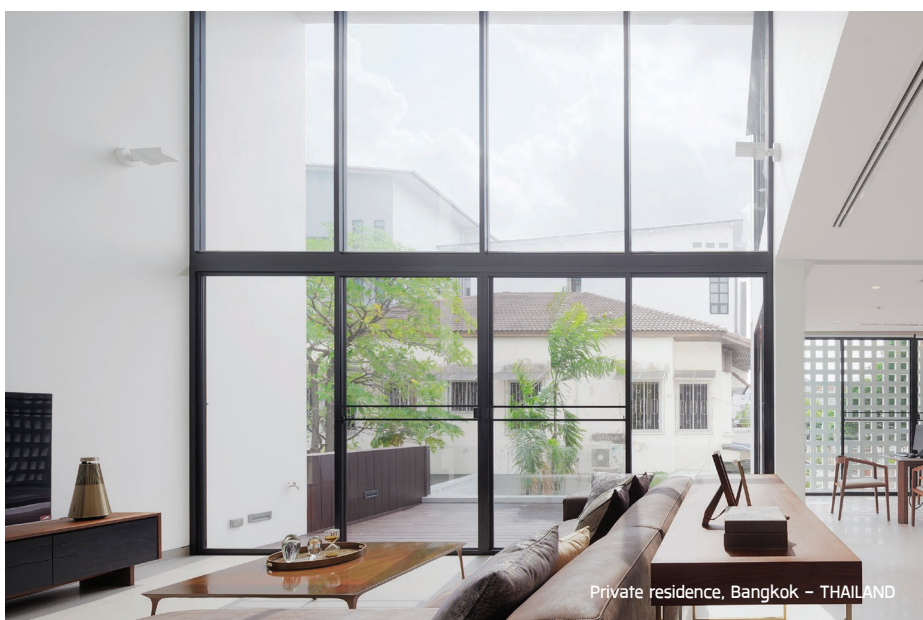

ATHLON

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller			Ordering Code
										
ATHLON	OD-2310 	20 W	Asymmetric	3000 K 4000 K	2120 lm 1860 lm	106 lm/W 93 lm/W	• •			2310-1-3-348-XX 2310-1-3-866-XX
		29 W	Asymmetric	3000 K 4000 K	2850 lm 2910 lm	98 lm/W 100 lm/W	• •			2310-1-3-345-XX 2310-1-3-858-XX
				3000 K 4000 K	2850 lm 2910 lm	98 lm/W 100 lm/W		• •		2310-1-4-345-XX 2310-1-4-858-XX
				3000 K 4000 K	2850 lm 2910 lm	98 lm/W 100 lm/W			• •	2310-1-5-345-XX 2310-1-5-858-XX
	OD-2311 	29 W	Bi-Symmetric	4000 K	2870 lm	98 lm/W	•			2311-7-3-858-XX
ATHLON Optic	OD-2312 	20 W	Asymmetric	3000 K 4000 K	1500 lm 1610 lm	75 lm/W 80 lm/W	• •			2312-1-3-867-XX 2312-1-3-868-XX
		28 W	Asymmetric	3000 K 4000 K	2000 lm 2150 lm	71 lm/W 76 lm/W	• •			2312-1-3-897-XX 2312-1-3-898-XX
				3000 K 4000 K	2000 lm 2150 lm	71 lm/W 76 lm/W		•		2312-1-4-897-XX
				3000 K 4000 K	2000 lm 2150 lm	71 lm/W 76 lm/W			• •	2312-1-5-897-XX 2312-1-5-898-XX
	OD-2313 	28 W	12°	3000 K	2100 lm	75 lm/W	•			2313-5-3-897-XX
		28 W	46°	3000 K	2240 lm	80 lm/W	•			2313-7-3-897-XX
				3000 K	2240 lm	80 lm/W		•		2313-7-4-897-XX
				3000 K	2240 lm	80 lm/W			•	2313-7-5-897-XX
	OD-2314 	20 W	Road Optic	3000 K	1650 lm	82 lm/W	•			2314-9-3-867-XX
		28 W	Road Optic	3000 K	2200 lm	78 lm/W	•			2314-9-3-897-XX
				4000 K	2360 lm	84 lm/W	•			2314-9-3-898-XX
				3000 K	2200 lm	78 lm/W		•		2314-9-4-897-XX
ATHLON Arm	OD-2315 	29 W	Asymmetric	4000 K	2910 lm	100 lm/W		•		2315-1-4-858-XX
ATHLON Optic Arm	OD-2317 	28 W	Asymmetric	3000 K	2000 lm	71 lm/W	•			2317-1-3-897-XX
	OD-2319 	28 W	Road Optic	3000 K	2200 lm	78 lm/W	•			2319-9-3-897-XX
ATHLON	OD-7256 	29 W	Asymmetric	3000 K	2850 lm	98 lm/W	•			7256-K-3-345-XX
ATHLON Optic	OD-7257 	28 W	Road Optic	3000 K	2200 lm	78 lm/W	•	•		7257-I-3-897-XX
		28 W	Asymmetric	3000 K	2000 lm	71 lm/W		•		7257-I-4-897-XX
	OD-7258 	58 W	Bi-Symmetric	3000 K	6420 lm	110 lm/W	•			7257-K-4-897-XX 7258-M-3-345-XX
ATHLON Optic - DS	OD-7259 	56 W	Asymmetric	3000 K	4000 lm	71 lm/W	•			7259-K-3-897-XX

* Pole is not included and has to be ordered separately





By its very name **CANNON** has a robust construction and is suitable in applications that require high lighting levels from medium to long distance. A wide range of mounting accessories including ground mounting base, pole top mounting adaptor, and wall/pole mounting arm is available. This luminaire family utilizes a high power COB LED with CRI 80+ in three steps SDCM.

CANNON is available in two sizes with mid-narrow, mid-wide and very wide beam angle in 2700K, 3000K and 4000K. Pure aluminum reflector used in this power projector is designed by high-end lighting engineering software. The integrated aiming scale allows the lighting designers to have confidence that the light will be distributed exactly on the desired surface. **CANNON** is suitable to light up medium size to large size objects or areas such as billboards, building facades, public parks, pedestrian, statues and public landmarks.




Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum housing.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- GFR PA6.6 terminal block.
- Installation must be carried out according to the enclosed product manual.

Available Color



****Custom colors are available on request.**

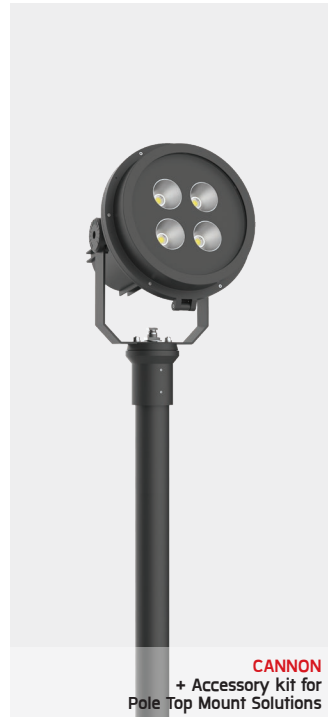


CANNON



- Reflector**
High efficiency anodize brightened CAD reflector.
- Cover**
Impact resistant tempered safety glass cover.
- Heat Sink**
State of art aluminum heat sink designed by flow simulation analysis software.
- Screws**
Anti-fall off stainless steel screws to ease up installation work and maintenance.
- Aiming**
Graduated scale with locking mechanism. Adjustable with Hexagon tool.
- Housing**
Enhanced LM6 die-cast aluminium housing with 16-step coating process including nano ceramic film. Low copper content <0.1%

• MODULAR SOLUTIONS

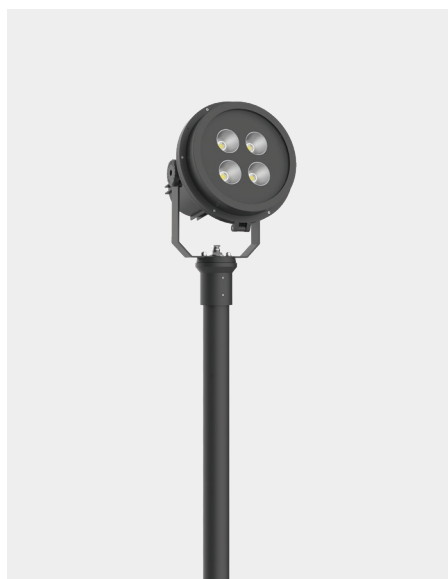

*Please see poles & anchor bolt section for pole mounting options

■ CANNON + Accessory kit for Pole Mount Solutions



2020
CANNON 280



2021
CANNON 360



Aluminum Pole /
Steel Pole



AUN-MOT-0001-XX
Pole mount adaptor,
spigot Ø76mm.



AUN-ACB-0005-00
Anchor bolt kit,
aluminum pole



AUN-ACB-0008-00
Anchor bolt kit,
pole Ø102mm and
151x102mm,
galvanized steel pole



AUN-ACB-0009-00
Anchor bolt kit,
pole Ø114 and
114/140,
galvanized steel pole



2020
CANNON 280



2021
CANNON 360



Steel Pole



AUN-CLP-0001-XX
Pole clamp,
pole Ø114mm.



AUN-ACB-0009-00
Anchor bolt kit,
pole Ø114 and
114/140,
galvanized steel pole



*Please see Poles & Anchor bolt section for pole mounting options



*Please see poles & anchor bolt section for pole mounting options



2020
CANNON 280



2021
CANNON 360



Steel Pole



AUN-MOT-0002-XX
Wall or pole
mounting arm,
pole Ø114mm




AUN-MOT-0004-XX
Wall or pole mounting
arm, pole Ø114mm,
double sided



AUN-ACB-0009-00
Anchor bolt kit,
pole Ø114 and
114/140,
galvanized steel pole

• MODULAR SOLUTIONS

■ **CANNON** + Accessory kit
for Ground Mount Solutions

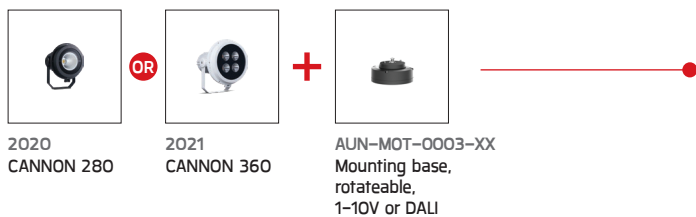

Jellicoe Street, Auckland – NEW ZEALAND



CANNON



CANNON 280

CANNON 360



CANNON

Application Type : Projector
Subgroup : Circular

CANNON 280 / 2020		
CANNON 360 / 2021		
Luminaire Performance		
6550 – 10980 lm		
60 – 96 W		
98 – 132 lm/W		
Beam Options		
Narrow	Medium	Wide
Color Temperature		
3000K/ 4000K		
Controller		
On-Off/ 1-10V/ DALI		
Input Options		
220–240Vac 50/60Hz		

Accessories			
	Glare shield ring louver		Glare shield cap
	Mounting base		Pole top mount
	Wall/ Pole mounting arm		Pole clamp
	Steel pole		Anchor bolt
	IP68 Connector		

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller			Ordering Code
										
CANNON 280	OD-2020		17°	3000 K	7080 lm	118 lm/W	•			2020-5-3-903-XX
	4000 K			7440 lm	124 lm/W	•			2020-5-3-906-XX	
	3000 K			7080 lm	118 lm/W		•		2020-5-4-903-XX	
	4000 K			7440 lm	124 lm/W		•		2020-5-4-906-XX	
	60 W	24°	3000 K	7570 lm	126 lm/W	•			2020-6-3-903-XX	
			4000 K	7950 lm	132 lm/W	•			2020-6-3-906-XX	
			3000 K	7570 lm	126 lm/W			•	2020-6-5-903-XX	
	60 W	37°	3000 K	6550 lm	109 lm/W	•			2020-7-3-903-XX	
			4000 K	6880 lm	114 lm/W	•			2020-7-3-906-XX	
			3000 K	6550 lm	109 lm/W		•		2020-7-4-903-XX	
			3000 K	6550 lm	109 lm/W			•	2020-7-5-903-XX	
CANNON 360	OD-2021		17°	3000 K	7800 lm	114 lm/W	•			2021-5-3-887-XX
	60°		3000 K	7500 lm	110 lm/W	•			2021-7-3-887-XX	
			4000 K	7690 lm	113 lm/W	•			2021-7-3-891-XX	
	60°		3000 K	9140 lm	98 lm/W			•	2021-7-5-902-XX	
	96 W		17°	3000 K	10690 lm	111 lm/W	•			2021-5-3-902-XX
				4000 K	10980 lm	114 lm/W	•			2021-5-3-905-XX
				3000 K	10690 lm	111 lm/W		•		2021-5-4-902-XX
	96 W	60°	3000 K	10280 lm	107 lm/W	•			2021-7-3-902-XX	
			4000 K	10560 lm	110 lm/W	•			2021-7-3-905-XX	
			3000 K	10280 lm	107 lm/W		•		2021-7-4-902-XX	

*Please contact sales team for special request.



Jellicoe Street, Aucland – NEW ZEALAND



NEW! Medium SPACE



COB



Mid Power



High Power

SPACE is a range of next generation flood lights for demanding outdoor lighting tasks. Six different tailored made light engines cover a wide range of lighting applications. High efficacy 3SDCM COBs offer highest lumen output. The high power LED options for **SPACE** gives lighting designers a wide choice of carefully calculated light distributions, including an ultra-narrow beam down to 8°. The **SPACE** RGBW version with optics-based color mixing is the ideal solution for impactful highlighting of outdoor spaces. **SPACE** can also be customized to tunable white solution which allows tasteful illumination of architectural structures in different color temperatures. Regardless of LED option, a glare shield cap, snoot and luminaire integrated honeycombs are available as standard accessory. Different mounting solutions such as a pole clamp or pole arm let **SPACE** to be installed in numerous applications.

SPACE can be equipped with a built-in photocell, DALI2 control system or state of the art wireless control utilizing CASAMBI. Minimal amount of tools required for installation and the prewired electrical connection simplifies the installation process.



Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum housing.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- GFR PA6.6 terminal block.
- Installation must be carried out according to the enclosed product manual.

Available Color



****Custom colors are available on request.**



NEW! Mini SPACE




COB



Mid Power




High Power

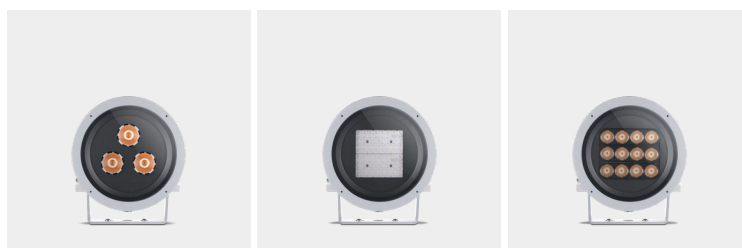

		Mini SPACE		
Accessory		COB	Mid Power	High Power
	Photocell, On-Off, pre-assembly from factory	•	•	•
	Glare Shield Cap.	•	•	•
	Snoot	•	•	•
	Honeycomb louver, COB, pre-assembly from factory	•	—	—
	Honeycomb louver, LED, pre-assembly from factory	—	—	•
	Pole mount adaptor, spigot diameter 76mm	•	•	•
	Pole clamp, pole diameter 114mm	•	•	•
	Wall or pole mounting arm, pole diameter 114mm	•	•	•
	Wall or pole mounting arm, pole diameter 114mm, double sided	•	•	•
	Mounting base, rotateable, 1-10V or DALI	•	•	•
	Cylindrical aluminium pole, diameter 140mm, H= 410mm, use with projector	•	•	•
	Aluminum pole / Galvanized steel pole	•	•	•

• MODULAR SOLUTIONS

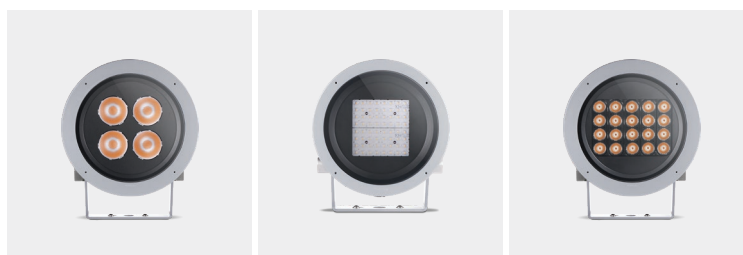

Medium SPACE

Accessory		COB	Mid Power	High Power
	Photocell, On-Off, pre-assembly from factory	•	•	•
	Microwave motion sensor, On-Off, pre-assembly from factory	•	•	•
	Snoot	•	•	•
	Honeycomb louver, COB, pre-assembly from factory	•	—	—
	Honeycomb louver, LED, pre-assembly from factory	—	—	•
	Pole mount adaptor, spigot diameter 76mm	•	•	•
	Pole clamp, pole diameter 114mm	•	•	•
	Wall or pole mounting arm, pole diameter 114mm	•	•	•
	Wall or pole mounting arm, pole diameter 114mm, double sided	•	•	•
	Mounting base, rotateable, 1-10V or DALI	•	•	•
	Cylindrical aluminium pole, diameter 140mm, H= 410mm, use with projector	•	•	•
	Aluminum pole / Galvanized steel pole	•	•	•

SPACE

• MODULAR SOLUTIONS




*Please see Poles & Anchor bolt section for pole mounting options

■ **SPACE** + Accessory kit
for Pole Mount Solutions



2040
Mini SPACE

OR



2041
Medium SPACE

+



Aluminum Pole /
Steel Pole

+



AUN-MOT-0001-XX
Pole mount adaptor,
spigot Ø76mm.

+



AUN-ACB-0005-00
Anchor bolt kit,
aluminum pole

OR



AUN-ACB-0008-00
Anchor bolt kit,
pole Ø102mm and
151x102mm,
galvanized steel pole

OR



AUN-ACB-0009-00
Anchor bolt kit,
pole Ø114 and
114/140,
galvanized steel pole



2040
Mini SPACE

OR



2041
Medium SPACE

+



Steel Pole

+



AUN-CLP-0001-XX
Pole clamp,
pole Ø114mm.

+



AUN-ACB-0009-00
Anchor bolt kit,
pole Ø114 and
114/140,
galvanized steel pole



*Please see Poles & Anchor bolt section for pole mounting options



*Please see Poles & Anchor bolt section for pole mounting options

•



2040
Mini SPACE

OR




2041
Medium SPACE

+



Steel Pole

+



AUN-MOT-0002-XX
Wall or pole
mounting arm,
pole Ø114mm

+



AUN-MOT-0004-XX
Wall or pole mounting
arm, pole Ø114mm,
double sided


+



AUN-ACB-0009-00
Anchor bolt kit,
pole Ø114 and
114/140,
galvanized steel pole

• MODULAR SOLUTIONS

▪ **SPACE** + Accessory kit
for Ground Mount Solutions

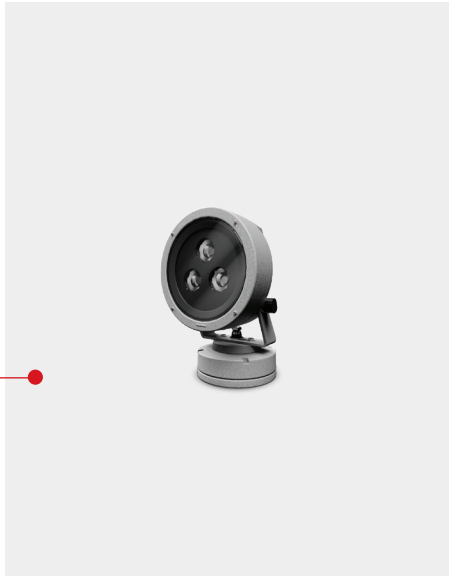

OD-2040
Mini SPACE

OR



OD-2041
Medium SPACE

+



AUN-MOT-0003-XX
Mounting base,
rotateable,
1-10V or DALI



2040
Mini SPACE

OR



2041
Medium SPACE

+



AUN-POL-0030-XX
Cylindrical aluminum pole,
Ø140mm. H=410mm.
use with projector


Typical Application



SPACE



Mini SPACE



Mini SPACE

Application Type : Projector
Subgroup : Circular

Mini SPACE / 2040


Luminaire Performance

1580 – 4980 lm

20 – 35 W

73 – 145 lm/W

Beam Options

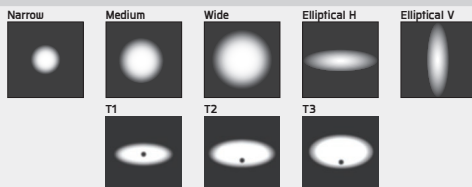

Color Temperature

2700K/ 3000K/ 4000K

Controller

On-Off/ 1-10V/ DALI/ CASAMBI

Input Options

220-240Vac 50/60Hz


Accessories

	Mounting base		Pole top mount
	Wall/ Pole mounting arm		Pole clamp
	Aluminum pole		Steel pole
	Anchor bolt		IP68 connector
	Short pole		Honey comb louver
	Glare shield cap		Snoot
	Photo cell		

*Please see Poles & Anchor bolt section for pole mounting options



Medium SPACE



Medium SPACE

Application Type : Projector
Subgroup : Circular

Medium SPACE / 2041	
Luminaire Performance	
3430 – 8970 lm	
38 – 76 W	
65 – 147 lm/W	
Beam Options	
Narrow	Medium
Wide	Elliptical H
Elliptical V	
T1	T2
T3	
Color Temperature	
2700K/ 3000K/ 4000K	
Controller	
On-Off/ 1-10V/ DALI/ CASAMBI	
Input Options	
220-240Vac 50/60Hz	

Accessories	
	Mounting base
	Pole top mount
	Wall/ Pole mounting arm
	Pole clamp
	Aluminum pole
	Steel pole
	Anchor bolt
	IP68 Connector
	Short Pole
	Honey comb louver
	Snoot
	Photo Cell
	Microwave Motion Sensor

*Please see Poles & Anchor bolt section for pole mounting options

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller					Ordering Code	
										CASAMBI	REMOTE		
Mini SPACE	OD-2040	 COB	19°	2700 K	3370 lm	102 lm/W	•					2040-6-3-503-XX	
	3000 K			3560 lm	107 lm/W	•					2040-6-3-901-XX		
	4000 K			3740 lm	113 lm/W	•					2040-6-3-904-XX		
	2700 K			3370 lm	102 lm/W		•				2040-6-4-503-XX		
	3000 K			3560 lm	107 lm/W		•				2040-6-4-901-XX		
	4000 K			3740 lm	113 lm/W		•				2040-6-4-904-XX		
	2700 K		3370 lm	102 lm/W			•				2040-6-5-503-XX		
			3000 K	3560 lm	107 lm/W			•			2040-6-5-901-XX		
			4000 K	3740 lm	113 lm/W			•			2040-6-5-904-XX		
			33 W	26°	2700 K	3340 lm	101 lm/W	•				2040-B-3-503-XX	
					3000 K	3530 lm	106 lm/W	•				2040-B-3-901-XX	
					4000 K	3710 lm	112 lm/W	•				2040-B-3-904-XX	
	2700 K	3340 lm			101 lm/W		•			2040-B-4-503-XX			
	3000 K	3530 lm			106 lm/W		•			2040-B-4-901-XX			
	4000 K	3710 lm			112 lm/W		•			2040-B-4-904-XX			
	2700 K	3340 lm	101 lm/W			•			2040-B-5-503-XX				
		3000 K	3530 lm	106 lm/W			•			2040-B-5-901-XX			
		4000 K	3710 lm	112 lm/W			•			2040-B-5-904-XX			
		33 W	34°	2700 K	3350 lm	101 lm/W	•				2040-C-3-503-XX		
				3000 K	3540 lm	107 lm/W	•				2040-C-3-901-XX		
				4000 K	3720 lm	112 lm/W	•				2040-C-3-904-XX		
	2700 K			3350 lm	101 lm/W		•			2040-C-4-503-XX			
	3000 K			3540 lm	107 lm/W		•			2040-C-4-901-XX			
	4000 K			3720 lm	112 lm/W		•			2040-C-4-904-XX			
	2700 K	3350 lm	101 lm/W			•			2040-C-5-503-XX				
		3000 K	3540 lm	107 lm/W			•			2040-C-5-901-XX			
		4000 K	3720 lm	112 lm/W			•			2040-C-5-904-XX			
		33 W	55°	2700 K	3150 lm	95 lm/W	•				2040-D-3-503-XX		
				3000 K	3330 lm	100 lm/W	•				2040-D-3-901-XX		
				4000 K	3500 lm	106 lm/W	•				2040-D-3-904-XX		
	2700 K			3150 lm	95 lm/W		•			2040-D-4-503-XX			
	3000 K			3330 lm	100 lm/W		•			2040-D-4-901-XX			
	4000 K			3500 lm	106 lm/W		•			2040-D-4-904-XX			
	2700 K	3150 lm	95 lm/W			•			2040-D-5-503-XX				
		3000 K	3330 lm	100 lm/W			•			2040-D-5-901-XX			
		4000 K	3500 lm	106 lm/W			•			2040-D-5-904-XX			
		34 W	19°	2700 K	3370 lm	99 lm/W				•	2040-6-A-503-XX		
				3000 K	3560 lm	104 lm/W				•	2040-6-A-901-XX		
				4000 K	3740 lm	110 lm/W				•	2040-6-A-904-XX		
	34 W	26°	2700 K	3340 lm	98 lm/W				•	2040-B-A-503-XX			
			3000 K	3530 lm	103 lm/W				•	2040-B-A-901-XX			
			4000 K	3710 lm	109 lm/W				•	2040-B-A-904-XX			
	34 W	34°	2700 K	3350 lm	98 lm/W				•	2040-C-A-503-XX			
			3000 K	3540 lm	104 lm/W				•	2040-C-A-901-XX			
			4000 K	3720 lm	109 lm/W				•	2040-C-A-904-XX			
	34 W	55°	2700 K	3150 lm	92 lm/W				•	2040-D-A-503-XX			
			3000 K	3330 lm	97 lm/W				•	2040-D-A-901-XX			
			4000 K	3500 lm	102 lm/W				•	2040-D-A-904-XX			
	 Mid Power	25 W	90°	3000 K	3460 lm	138 lm/W	•					2040-E-3-668-XX	
				4000 K	3640 lm	145 lm/W	•					2040-E-3-669-XX	
				3000 K	3460 lm	138 lm/W		•				2040-E-4-668-XX	
				4000 K	3640 lm	145 lm/W		•				2040-E-4-669-XX	
				3000 K	3460 lm	138 lm/W			•			2040-E-5-668-XX	
				4000 K	3640 lm	145 lm/W			•			2040-E-5-669-XX	
		3000 K	3460 lm	138 lm/W				•			2040-E-A-668-XX		
			4000 K	3640 lm	145 lm/W				•		2040-E-A-669-XX		
			25 W	T1	3000 K	3160 lm	126 lm/W	•					2040-U-3-668-XX
					4000 K	3320 lm	132 lm/W	•					2040-U-3-669-XX
					3000 K	3160 lm	126 lm/W		•				2040-U-4-668-XX
					4000 K	3320 lm	132 lm/W		•				2040-U-4-669-XX
		3000 K			3160 lm	126 lm/W			•			2040-U-5-668-XX	
		4000 K			3320 lm	132 lm/W			•			2040-U-5-669-XX	
		3000 K	3160 lm	126 lm/W					•		2040-U-A-668-XX		
			4000 K	3320 lm	132 lm/W				•		2040-U-A-669-XX		
			25 W	T2	3000 K	3270 lm	130 lm/W	•					2040-I-3-668-XX
					4000 K	3440 lm	137 lm/W	•					2040-I-3-669-XX
					3000 K	3270 lm	130 lm/W		•				2040-I-4-668-XX
					4000 K	3440 lm	137 lm/W		•				2040-I-4-669-XX
		3000 K			3270 lm	130 lm/W			•			2040-I-5-668-XX	
		4000 K			3440 lm	137 lm/W			•			2040-I-5-669-XX	
		3000 K	3270 lm	130 lm/W					•		2040-I-A-668-XX		
			4000 K	3440 lm	137 lm/W				•		2040-I-A-669-XX		
	25 W		T3	3000 K	2950 lm	118 lm/W	•					2040-J-3-668-XX	
				4000 K	3100 lm	124 lm/W	•					2040-J-3-669-XX	
				3000 K	2950 lm	118 lm/W		•				2040-J-4-668-XX	
				4000 K	3100 lm	124 lm/W		•				2040-J-4-669-XX	
		3000 K		2950 lm	118 lm/W			•			2040-J-5-668-XX		
		4000 K		3100 lm	124 lm/W			•			2040-J-5-669-XX		
	3000 K	2950 lm	118 lm/W					•		2040-J-A-668-XX			
		4000 K	3100 lm	124 lm/W				•		2040-J-A-669-XX			

*Please contact sales team for special request.

Mini SPACE

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller					Ordering Code
									CASAMBI	REMOTE	
OD-2040  Mid Power	35 W	90°	3000 K	4720 lm	134 lm/W	•					2040-E-3-666-XX
			4000 K	4980 lm	142 lm/W	•					2040-E-3-667-XX
			3000 K	4720 lm	134 lm/W		•				2040-E-4-666-XX
			4000 K	4980 lm	142 lm/W		•				2040-E-4-667-XX
			3000 K	4720 lm	134 lm/W			•			2040-E-5-666-XX
			4000 K	4980 lm	142 lm/W			•			2040-E-5-667-XX
	35 W	T1	3000 K	4720 lm	134 lm/W				•		2040-E-A-666-XX
			4000 K	4980 lm	142 lm/W				•		2040-E-A-667-XX
			3000 K	4310 lm	123 lm/W	•					2040-U-3-666-XX
			4000 K	4550 lm	130 lm/W	•					2040-U-3-667-XX
			3000 K	4310 lm	123 lm/W		•				2040-U-4-666-XX
			4000 K	4550 lm	130 lm/W		•				2040-U-4-667-XX
	35 W	T2	3000 K	4310 lm	123 lm/W			•			2040-U-5-666-XX
			4000 K	4550 lm	130 lm/W			•			2040-U-5-667-XX
			3000 K	4310 lm	123 lm/W				•		2040-U-A-666-XX
			4000 K	4550 lm	130 lm/W				•		2040-U-A-667-XX
			3000 K	4460 lm	127 lm/W	•					2040-I-3-666-XX
			4000 K	4710 lm	134 lm/W	•					2040-I-3-667-XX
	35 W	T3	3000 K	4460 lm	127 lm/W		•				2040-I-4-666-XX
			4000 K	4710 lm	134 lm/W		•				2040-I-4-667-XX
			3000 K	4460 lm	127 lm/W			•			2040-I-5-666-XX
			4000 K	4710 lm	134 lm/W			•			2040-I-5-667-XX
			3000 K	4460 lm	127 lm/W				•		2040-I-A-666-XX
			4000 K	4710 lm	134 lm/W				•		2040-I-A-667-XX
 High Power	20 W	11°	3000 K	4020 lm	114 lm/W	•					2040-J-3-666-XX
			4000 K	4250 lm	121 lm/W	•					2040-J-3-667-XX
			3000 K	4020 lm	114 lm/W		•				2040-J-4-666-XX
			4000 K	4250 lm	121 lm/W		•				2040-J-4-667-XX
			3000 K	4020 lm	114 lm/W			•			2040-J-5-666-XX
			4000 K	4250 lm	121 lm/W			•			2040-J-5-667-XX
			3000 K	4020 lm	114 lm/W				•		2040-J-A-666-XX
			4000 K	4250 lm	121 lm/W				•		2040-J-A-667-XX
	20 W	29°	2700 K	1820 lm	91 lm/W	•					2040-A-3-393-XX
			3000 K	1820 lm	91 lm/W	•					2040-A-3-394-XX
			4000 K	1970 lm	98 lm/W	•					2040-A-3-395-XX
			2700 K	1820 lm	91 lm/W		•				2040-A-4-393-XX
			3000 K	1820 lm	91 lm/W		•				2040-A-4-394-XX
			4000 K	1970 lm	98 lm/W		•				2040-A-4-395-XX
			2700 K	1820 lm	91 lm/W			•			2040-A-5-393-XX
			3000 K	1820 lm	91 lm/W			•			2040-A-5-394-XX
			4000 K	1970 lm	98 lm/W			•			2040-A-5-395-XX
			2700 K	1820 lm	91 lm/W				•		2040-A-A-393-XX
			3000 K	1820 lm	91 lm/W				•		2040-A-A-394-XX
			4000 K	1970 lm	98 lm/W				•		2040-A-A-395-XX
	20 W	42°	2700 K	1660 lm	83 lm/W	•					2040-B-3-393-XX
			3000 K	1660 lm	83 lm/W	•					2040-B-3-394-XX
			4000 K	1790 lm	89 lm/W	•					2040-B-3-395-XX
			2700 K	1660 lm	83 lm/W		•				2040-B-4-393-XX
			3000 K	1660 lm	83 lm/W		•				2040-B-4-394-XX
			4000 K	1790 lm	89 lm/W		•				2040-B-4-395-XX
			2700 K	1660 lm	83 lm/W			•			2040-B-5-393-XX
			3000 K	1660 lm	83 lm/W			•			2040-B-5-394-XX
			4000 K	1790 lm	89 lm/W			•			2040-B-5-395-XX
			2700 K	1660 lm	83 lm/W				•		2040-B-A-393-XX
			3000 K	1660 lm	83 lm/W				•		2040-B-A-394-XX
			4000 K	1790 lm	89 lm/W				•		2040-B-A-395-XX
	20 W	44°/14°	2700 K	1710 lm	85 lm/W	•					2040-C-3-393-XX
			3000 K	1710 lm	85 lm/W	•					2040-C-3-394-XX
			4000 K	1840 lm	92 lm/W	•					2040-C-3-395-XX
			2700 K	1710 lm	85 lm/W		•				2040-C-4-393-XX
			3000 K	1710 lm	85 lm/W		•				2040-C-4-394-XX
			4000 K	1840 lm	92 lm/W		•				2040-C-4-395-XX
			2700 K	1710 lm	85 lm/W			•			2040-C-5-393-XX
			3000 K	1710 lm	85 lm/W			•			2040-C-5-394-XX
			4000 K	1840 lm	92 lm/W			•			2040-C-5-395-XX
			2700 K	1710 lm	85 lm/W				•		2040-C-A-393-XX
			3000 K	1710 lm	85 lm/W				•		2040-C-A-394-XX
			4000 K	1840 lm	92 lm/W				•		2040-C-A-395-XX
	20 W	44°/14°	2700 K	1690 lm	84 lm/W	•					2040-H-3-393-XX
			3000 K	1690 lm	84 lm/W	•					2040-H-3-394-XX
			4000 K	1820 lm	91 lm/W	•					2040-H-3-395-XX
			2700 K	1690 lm	84 lm/W		•				2040-H-4-393-XX
			3000 K	1690 lm	84 lm/W		•				2040-H-4-394-XX
			4000 K	1820 lm	91 lm/W		•				2040-H-4-395-XX
			2700 K	1690 lm	84 lm/W			•			2040-H-5-393-XX
			3000 K	1690 lm	84 lm/W			•			2040-H-5-394-XX
			4000 K	1820 lm	91 lm/W			•			2040-H-5-395-XX
			2700 K	1690 lm	84 lm/W				•		2040-H-A-393-XX
			3000 K	1690 lm	84 lm/W				•		2040-H-A-394-XX
			4000 K	1820 lm	91 lm/W				•		2040-H-A-395-XX

Mini SPACE

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller					Ordering Code
									CASAMBI	REMOTE	
OD-2040  High Power	20 W	14°/44°	2700 K	1690 lm	84 lm/W	•					2040-N-3-393-XX
			3000 K	1690 lm	84 lm/W	•					2040-N-3-394-XX
			4000 K	1820 lm	91 lm/W	•					2040-N-3-395-XX
			2700 K	1690 lm	84 lm/W		•				2040-N-4-393-XX
			3000 K	1690 lm	84 lm/W		•				2040-N-4-394-XX
			4000 K	1820 lm	91 lm/W		•				2040-N-4-395-XX
			2700 K	1690 lm	84 lm/W			•			2040-N-5-393-XX
			3000 K	1690 lm	84 lm/W			•			2040-N-5-394-XX
			4000 K	1820 lm	91 lm/W			•			2040-N-5-395-XX
			2700 K	1690 lm	84 lm/W				•		2040-N-A-393-XX
			3000 K	1690 lm	84 lm/W				•		2040-N-A-394-XX
			4000 K	1820 lm	91 lm/W				•		2040-N-A-395-XX
	21 W	8°	3000 K	1580 lm	75 lm/W	•					2040-4-3-397-XX
			3000 K	1580 lm	75 lm/W		•				2040-4-4-397-XX
			3000 K	1580 lm	75 lm/W			•			2040-4-5-397-XX
			3000 K	1580 lm	75 lm/W				•		2040-4-A-397-XX
	27 W	11°	2700 K	2500 lm	92 lm/W	•					2040-A-3-387-XX
			3000 K	2500 lm	92 lm/W	•					2040-A-3-388-XX
			4000 K	2660 lm	98 lm/W	•					2040-A-3-389-XX
			2700 K	2500 lm	92 lm/W		•				2040-A-4-387-XX
			3000 K	2500 lm	92 lm/W		•				2040-A-4-388-XX
			4000 K	2660 lm	98 lm/W		•				2040-A-4-389-XX
			2700 K	2500 lm	92 lm/W			•			2040-A-5-387-XX
			3000 K	2500 lm	92 lm/W			•			2040-A-5-388-XX
			4000 K	2660 lm	98 lm/W			•			2040-A-5-389-XX
			2700 K	2500 lm	92 lm/W				•		2040-A-A-387-XX
			3000 K	2500 lm	92 lm/W				•		2040-A-A-388-XX
			4000 K	2660 lm	98 lm/W				•		2040-A-A-389-XX
	27 W	29°	2700 K	2280 lm	84 lm/W	•					2040-B-3-387-XX
			3000 K	2280 lm	84 lm/W	•					2040-B-3-388-XX
			4000 K	2430 lm	90 lm/W	•					2040-B-3-389-XX
			2700 K	2280 lm	84 lm/W		•				2040-B-4-387-XX
			3000 K	2280 lm	84 lm/W		•				2040-B-4-388-XX
			4000 K	2430 lm	90 lm/W		•				2040-B-4-389-XX
			2700 K	2280 lm	84 lm/W			•			2040-B-5-387-XX
			3000 K	2280 lm	84 lm/W			•			2040-B-5-388-XX
			4000 K	2430 lm	90 lm/W			•			2040-B-5-389-XX
			2700 K	2280 lm	84 lm/W				•		2040-B-A-387-XX
			3000 K	2280 lm	84 lm/W				•		2040-B-A-388-XX
			4000 K	2430 lm	90 lm/W				•		2040-B-A-389-XX
	27 W	42°	2700 K	2340 lm	86 lm/W	•					2040-C-3-387-XX
			3000 K	2340 lm	86 lm/W	•					2040-C-3-388-XX
			4000 K	2490 lm	92 lm/W	•					2040-C-3-389-XX
			2700 K	2340 lm	86 lm/W		•				2040-C-4-387-XX
			3000 K	2340 lm	86 lm/W		•				2040-C-4-388-XX
			4000 K	2490 lm	92 lm/W		•				2040-C-4-389-XX
			2700 K	2340 lm	86 lm/W			•			2040-C-5-387-XX
			3000 K	2340 lm	86 lm/W			•			2040-C-5-388-XX
			4000 K	2490 lm	92 lm/W			•			2040-C-5-389-XX
			2700 K	2340 lm	86 lm/W				•		2040-C-A-387-XX
			3000 K	2340 lm	86 lm/W				•		2040-C-A-388-XX
			4000 K	2490 lm	92 lm/W				•		2040-C-A-389-XX
	27 W	44°/14°	2700 K	2320 lm	85 lm/W	•					2040-H-3-387-XX
			3000 K	2320 lm	85 lm/W	•					2040-H-3-388-XX
			4000 K	2470 lm	91 lm/W	•					2040-H-3-389-XX
			2700 K	2320 lm	85 lm/W		•				2040-H-4-387-XX
			3000 K	2320 lm	85 lm/W		•				2040-H-4-388-XX
			4000 K	2470 lm	91 lm/W		•				2040-H-4-389-XX
			2700 K	2320 lm	85 lm/W			•			2040-H-5-387-XX
			3000 K	2320 lm	85 lm/W			•			2040-H-5-388-XX
			4000 K	2470 lm	91 lm/W			•			2040-H-5-389-XX
			2700 K	2320 lm	85 lm/W				•		2040-H-A-387-XX
			3000 K	2320 lm	85 lm/W				•		2040-H-A-388-XX
			4000 K	2470 lm	91 lm/W				•		2040-H-A-389-XX
	27 W	14°/44°	2700 K	2320 lm	85 lm/W	•					2040-N-3-387-XX
			3000 K	2320 lm	85 lm/W	•					2040-N-3-388-XX
			4000 K	2470 lm	91 lm/W	•					2040-N-3-389-XX
			2700 K	2320 lm	85 lm/W		•				2040-N-4-387-XX
			3000 K	2320 lm	85 lm/W		•				2040-N-4-388-XX
			4000 K	2470 lm	91 lm/W		•				2040-N-4-389-XX
			2700 K	2320 lm	85 lm/W			•			2040-N-5-387-XX
			3000 K	2320 lm	85 lm/W			•			2040-N-5-388-XX
			4000 K	2470 lm	91 lm/W			•			2040-N-5-389-XX
			2700 K	2320 lm	85 lm/W				•		2040-N-A-387-XX
			3000 K	2320 lm	85 lm/W				•		2040-N-A-388-XX
			4000 K	2470 lm	91 lm/W				•		2040-N-A-389-XX
	28 W	8°	3000 K	2070 lm	73 lm/W	•					2040-4-3-391-XX
			3000 K	2070 lm	73 lm/W		•				2040-4-4-391-XX
			3000 K	2070 lm	73 lm/W			•			2040-4-5-391-XX
			3000 K	2070 lm	73 lm/W				•		2040-4-A-391-XX

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller					Ordering Code
									CASAMBI	REMOTE	
OD-2041  COB	72 W	22°	2700 K	8320 lm	115 lm/W	•					2041-B-3-505-XX
			3000 K	8720 lm	121 lm/W	•					2041-B-3-902-XX
			4000 K	8930 lm	124 lm/W	•					2041-B-3-905-XX
			2700 K	8320 lm	115 lm/W		•				2041-B-4-505-XX
			3000 K	8720 lm	121 lm/W		•				2041-B-4-902-XX
			4000 K	8930 lm	124 lm/W		•				2041-B-4-905-XX
			2700 K	8320 lm	115 lm/W			•			2041-B-5-505-XX
			3000 K	8720 lm	121 lm/W			•			2041-B-5-902-XX
			4000 K	8930 lm	124 lm/W			•			2041-B-5-905-XX
			2700 K	8320 lm	115 lm/W				•		2041-B-A-505-XX
			3000 K	8720 lm	121 lm/W				•		2041-B-A-902-XX
			4000 K	8930 lm	124 lm/W				•		2041-B-A-905-XX
	72 W	32°	2700 K	7830 lm	108 lm/W	•					2041-C-3-505-XX
			3000 K	8210 lm	114 lm/W	•					2041-C-3-902-XX
			4000 K	8410 lm	116 lm/W	•					2041-C-3-905-XX
			2700 K	7830 lm	108 lm/W		•				2041-C-4-505-XX
			3000 K	8210 lm	114 lm/W		•				2041-C-4-902-XX
			4000 K	8410 lm	116 lm/W		•				2041-C-4-905-XX
			2700 K	7830 lm	108 lm/W			•			2041-C-5-505-XX
			3000 K	8210 lm	114 lm/W			•			2041-C-5-902-XX
			4000 K	8410 lm	116 lm/W			•			2041-C-5-905-XX
			2700 K	7830 lm	108 lm/W				•		2041-C-A-505-XX
			3000 K	8210 lm	114 lm/W				•		2041-C-A-902-XX
			4000 K	8410 lm	116 lm/W				•		2041-C-A-905-XX
	72 W	52°	2700 K	7300 lm	101 lm/W	•					2041-D-3-505-XX
			3000 K	7650 lm	106 lm/W	•					2041-D-3-902-XX
			4000 K	7840 lm	108 lm/W	•					2041-D-3-905-XX
			2700 K	7300 lm	101 lm/W		•				2041-D-4-505-XX
			3000 K	7650 lm	106 lm/W		•				2041-D-4-902-XX
			4000 K	7840 lm	108 lm/W		•				2041-D-4-905-XX
			2700 K	7300 lm	101 lm/W			•			2041-D-5-505-XX
			3000 K	7650 lm	106 lm/W			•			2041-D-5-902-XX
			4000 K	7840 lm	108 lm/W			•			2041-D-5-905-XX
			2700 K	7300 lm	101 lm/W				•		2041-D-A-505-XX
			3000 K	7650 lm	106 lm/W				•		2041-D-A-902-XX
			4000 K	7840 lm	108 lm/W				•		2041-D-A-905-XX
	76 W	15°	2700 K	8260 lm	108 lm/W	•					2041-A-3-710-XX
			3000 K	8540 lm	112 lm/W	•					2041-A-3-719-XX
			4000 K	8970 lm	118 lm/W	•					2041-A-3-720-XX
			2700 K	8260 lm	108 lm/W		•				2041-A-4-710-XX
			3000 K	8540 lm	112 lm/W		•				2041-A-4-719-XX
			4000 K	8970 lm	118 lm/W		•				2041-A-4-720-XX
			2700 K	8260 lm	108 lm/W			•			2041-A-5-710-XX
			3000 K	8540 lm	112 lm/W			•			2041-A-5-719-XX
			4000 K	8970 lm	118 lm/W			•			2041-A-5-720-XX
			2700 K	8260 lm	108 lm/W				•		2041-A-A-710-XX
			3000 K	8540 lm	112 lm/W				•		2041-A-A-719-XX
			4000 K	8970 lm	118 lm/W				•		2041-A-A-720-XX
 Mid Power	38 W	90°	3000 K	5330 lm	140 lm/W	•					2041-E-3-668-XX
			4000 K	5610 lm	147 lm/W	•					2041-E-3-669-XX
			3000 K	5330 lm	140 lm/W		•				2041-E-4-668-XX
			4000 K	5610 lm	147 lm/W		•				2041-E-4-669-XX
			3000 K	5330 lm	140 lm/W			•			2041-E-5-668-XX
			4000 K	5610 lm	147 lm/W			•			2041-E-5-669-XX
			3000 K	5330 lm	140 lm/W				•		2041-E-A-668-XX
			4000 K	5610 lm	147 lm/W				•		2041-E-A-669-XX
			3000 K	4970 lm	130 lm/W	•					2041-U-3-668-XX
			4000 K	5230 lm	137 lm/W	•					2041-U-3-669-XX
			3000 K	4970 lm	130 lm/W		•				2041-U-4-668-XX
			4000 K	5230 lm	137 lm/W		•				2041-U-4-669-XX
	38 W	T1	3000 K	4970 lm	130 lm/W			•			2041-U-5-668-XX
			4000 K	5230 lm	137 lm/W			•			2041-U-5-669-XX
			3000 K	4970 lm	130 lm/W				•		2041-U-A-668-XX
			4000 K	5230 lm	137 lm/W				•		2041-U-A-669-XX
			3000 K	5120 lm	134 lm/W	•					2041-I-3-668-XX
			4000 K	5390 lm	141 lm/W	•					2041-I-3-669-XX
	38 W	T2	3000 K	5120 lm	134 lm/W		•				2041-I-4-668-XX
			4000 K	5390 lm	141 lm/W		•				2041-I-4-669-XX
			3000 K	5120 lm	134 lm/W			•			2041-I-5-668-XX
			4000 K	5390 lm	141 lm/W			•			2041-I-5-669-XX

Medium SPACE

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller					Ordering Code
									CASAMBI	REMOTE	
<div>OD-2041</div> <div></div> <div>Mid Power</div>	38 W	T2	3000 K	5120 lm	134 lm/W				•		2041-I-A-668-XX
			4000 K	5390 lm	141 lm/W				•		2041-I-A-669-XX
	38 W	T3	3000 K	4600 lm	121 lm/W	•					2041-J-3-668-XX
			4000 K	4840 lm	127 lm/W	•					2041-J-3-669-XX
			3000 K	4600 lm	121 lm/W		•				2041-J-4-668-XX
			4000 K	4840 lm	127 lm/W		•				2041-J-4-669-XX
			3000 K	4600 lm	121 lm/W			•			2041-J-5-668-XX
			4000 K	4840 lm	127 lm/W			•			2041-J-5-669-XX
	52 W	90°	3000 K	4600 lm	121 lm/W				•		2041-J-A-668-XX
			4000 K	4840 lm	127 lm/W				•		2041-J-A-669-XX
			3000 K	7280 lm	140 lm/W	•					2041-E-3-666-XX
			4000 K	7680 lm	147 lm/W	•					2041-E-3-667-XX
			3000 K	7280 lm	140 lm/W		•				2041-E-4-666-XX
			4000 K	7680 lm	147 lm/W		•				2041-E-4-667-XX
			3000 K	7280 lm	140 lm/W			•			2041-E-5-666-XX
			4000 K	7680 lm	147 lm/W			•			2041-E-5-667-XX
			3000 K	7280 lm	140 lm/W				•		2041-E-A-666-XX
			4000 K	7680 lm	147 lm/W				•		2041-E-A-667-XX
	52 W	T1	3000 K	6790 lm	130 lm/W	•					2041-U-3-666-XX
			4000 K	7160 lm	137 lm/W	•					2041-U-3-667-XX
			3000 K	6790 lm	130 lm/W		•				2041-U-4-666-XX
			4000 K	7160 lm	137 lm/W		•				2041-U-4-667-XX
			3000 K	6790 lm	130 lm/W			•			2041-U-5-666-XX
			4000 K	7160 lm	137 lm/W			•			2041-U-5-667-XX
			3000 K	6790 lm	130 lm/W				•		2041-U-A-666-XX
			4000 K	7160 lm	137 lm/W				•		2041-U-A-667-XX
			3000 K	7000 lm	134 lm/W	•					2041-I-3-666-XX
			4000 K	7380 lm	141 lm/W	•					2041-I-3-667-XX
	52 W	T2	3000 K	7000 lm	134 lm/W		•				2041-I-4-666-XX
			4000 K	7380 lm	141 lm/W		•				2041-I-4-667-XX
			3000 K	7000 lm	134 lm/W			•			2041-I-5-666-XX
			4000 K	7380 lm	141 lm/W			•			2041-I-5-667-XX
			3000 K	7000 lm	134 lm/W				•		2041-I-A-666-XX
			4000 K	7380 lm	141 lm/W				•		2041-I-A-667-XX
			3000 K	6290 lm	120 lm/W	•					2041-J-3-666-XX
			4000 K	6630 lm	127 lm/W	•					2041-J-3-667-XX
	52 W	T3	3000 K	6290 lm	120 lm/W		•				2041-J-4-666-XX
			4000 K	6630 lm	127 lm/W		•				2041-J-4-667-XX
			3000 K	6290 lm	120 lm/W			•			2041-J-5-666-XX
			4000 K	6630 lm	127 lm/W			•			2041-J-5-667-XX
			3000 K	6290 lm	120 lm/W				•		2041-J-A-666-XX
			4000 K	6630 lm	127 lm/W				•		2041-J-A-667-XX
<div></div> <div>High Power</div>	47 W	10°	3000 K	3430 lm	72 lm/W	•					2041-4-3-397-XX
			3000 K	3430 lm	72 lm/W		•				2041-4-4-397-XX
			3000 K	3430 lm	72 lm/W			•			2041-4-5-397-XX
			3000 K	3430 lm	72 lm/W				•		2041-4-A-397-XX
	50 W	12°	2700 K	4500 lm	90 lm/W	•					2041-A-3-393-XX
			3000 K	4500 lm	90 lm/W	•					2041-A-3-394-XX
			4000 K	4800 lm	96 lm/W	•					2041-A-3-395-XX
			2700 K	4500 lm	90 lm/W		•				2041-A-4-393-XX
			3000 K	4500 lm	90 lm/W		•				2041-A-4-394-XX
			4000 K	4800 lm	96 lm/W		•				2041-A-4-395-XX
			2700 K	4500 lm	90 lm/W			•			2041-A-5-393-XX
			3000 K	4500 lm	90 lm/W			•			2041-A-5-394-XX
			4000 K	4800 lm	96 lm/W			•			2041-A-5-395-XX
		29°	2700 K	4500 lm	90 lm/W				•		2041-A-A-393-XX
			3000 K	4500 lm	90 lm/W				•		2041-A-A-394-XX
			4000 K	4800 lm	96 lm/W				•		2041-A-A-395-XX
			2700 K	3990 lm	79 lm/W	•					2041-B-3-393-XX
			3000 K	3990 lm	79 lm/W	•					2041-B-3-394-XX
			4000 K	4260 lm	85 lm/W	•					2041-B-3-395-XX
			2700 K	3990 lm	79 lm/W		•				2041-B-4-393-XX
			3000 K	3990 lm	79 lm/W		•				2041-B-4-394-XX
			4000 K	4260 lm	85 lm/W		•				2041-B-4-395-XX
	50 W	40°	2700 K	3990 lm	79 lm/W			•			2041-B-5-393-XX
			3000 K	3990 lm	79 lm/W			•			2041-B-5-394-XX
			4000 K	4260 lm	85 lm/W			•			2041-B-5-395-XX
			2700 K	3990 lm	79 lm/W				•		2041-B-A-393-XX
			3000 K	3990 lm	79 lm/W				•		2041-B-A-394-XX
			4000 K	4260 lm	85 lm/W				•		2041-B-A-395-XX
		40°	2700 K	4160 lm	83 lm/W	•					2041-C-3-393-XX
			3000 K	4160 lm	83 lm/W	•					2041-C-3-394-XX
			4000 K	4440 lm	88 lm/W	•					2041-C-3-395-XX
			2700 K	4160 lm	83 lm/W		•				2041-C-4-393-XX
			3000 K	4160 lm	83 lm/W		•				2041-C-4-394-XX
			4000 K	4440 lm	88 lm/W		•				2041-C-4-395-XX
			2700 K	4160 lm	83 lm/W			•			2041-C-5-393-XX
			3000 K	4160 lm	83 lm/W			•			2041-C-5-394-XX
			4000 K	4440 lm	88 lm/W			•			2041-C-5-395-XX
			2700 K	4160 lm	83 lm/W				•		2041-C-A-393-XX
			3000 K	4160 lm	83 lm/W				•		2041-C-A-394-XX
			4000 K	4440 lm	88 lm/W				•		2041-C-A-395-XX

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller					Ordering Code
									CASAMBI	REMOTE	
OD-2041  High Power	50 W	44°/15°	2700 K	4050 lm	81 lm/W	•					2041-H-3-393-XX
			3000 K	4050 lm	81 lm/W	•					2041-H-3-394-XX
			4000 K	4320 lm	86 lm/W	•					2041-H-3-395-XX
			2700 K	4050 lm	81 lm/W		•				2041-H-4-393-XX
			3000 K	4050 lm	81 lm/W		•				2041-H-4-394-XX
			4000 K	4320 lm	86 lm/W		•				2041-H-4-395-XX
			2700 K	4050 lm	81 lm/W			•			2041-H-5-393-XX
			3000 K	4050 lm	81 lm/W			•			2041-H-5-394-XX
			4000 K	4320 lm	86 lm/W			•			2041-H-5-395-XX
			2700 K	4050 lm	81 lm/W				•		2041-H-A-393-XX
			3000 K	4050 lm	81 lm/W				•		2041-H-A-394-XX
			4000 K	4320 lm	86 lm/W				•		2041-H-A-395-XX
	50 W	15°/44°	2700 K	4050 lm	81 lm/W	•					2041-N-3-393-XX
			3000 K	4050 lm	81 lm/W	•					2041-N-3-394-XX
			4000 K	4320 lm	86 lm/W	•					2041-N-3-395-XX
			2700 K	4050 lm	81 lm/W		•				2041-N-4-393-XX
			3000 K	4050 lm	81 lm/W		•				2041-N-4-394-XX
			4000 K	4320 lm	86 lm/W		•				2041-N-4-395-XX
			2700 K	4050 lm	81 lm/W			•			2041-N-5-393-XX
			3000 K	4050 lm	81 lm/W			•			2041-N-5-394-XX
			4000 K	4320 lm	86 lm/W			•			2041-N-5-395-XX
			2700 K	4050 lm	81 lm/W				•		2041-N-A-393-XX
			3000 K	4050 lm	81 lm/W				•		2041-N-A-394-XX
			4000 K	4320 lm	86 lm/W				•		2041-N-A-395-XX
	63 W	10°	3000 K	4150 lm	65 lm/W	•					2041-4-3-391-XX
			3000 K	4150 lm	65 lm/W		•				2041-4-4-391-XX
			3000 K	4150 lm	65 lm/W			•			2041-4-5-391-XX
			3000 K	4150 lm	65 lm/W				•		2041-4-A-391-XX
	73 W	12°	2700 K	6450 lm	88 lm/W	•					2041-A-3-387-XX
			3000 K	6450 lm	88 lm/W	•					2041-A-3-388-XX
			4000 K	6880 lm	94 lm/W	•					2041-A-3-389-XX
			2700 K	6450 lm	88 lm/W		•				2041-A-4-387-XX
			3000 K	6450 lm	88 lm/W		•				2041-A-4-388-XX
			4000 K	6880 lm	94 lm/W		•				2041-A-4-389-XX
			2700 K	6450 lm	88 lm/W			•			2041-A-5-387-XX
			3000 K	6450 lm	88 lm/W			•			2041-A-5-388-XX
			4000 K	6880 lm	94 lm/W			•			2041-A-5-389-XX
			2700 K	6450 lm	88 lm/W				•		2041-A-A-387-XX
			3000 K	6450 lm	88 lm/W				•		2041-A-A-388-XX
			4000 K	6880 lm	94 lm/W				•		2041-A-A-389-XX
	73 W	29°	2700 K	5730 lm	78 lm/W	•					2041-B-3-387-XX
			3000 K	5730 lm	78 lm/W	•					2041-B-3-388-XX
			4000 K	6110 lm	83 lm/W	•					2041-B-3-389-XX
			2700 K	5730 lm	78 lm/W		•				2041-B-4-387-XX
			3000 K	5730 lm	78 lm/W		•				2041-B-4-388-XX
			4000 K	6110 lm	83 lm/W		•				2041-B-4-389-XX
			2700 K	5730 lm	78 lm/W			•			2041-B-5-387-XX
			3000 K	5730 lm	78 lm/W			•			2041-B-5-388-XX
			4000 K	6110 lm	83 lm/W			•			2041-B-5-389-XX
			2700 K	5730 lm	78 lm/W				•		2041-B-A-387-XX
			3000 K	5730 lm	78 lm/W				•		2041-B-A-388-XX
			4000 K	6110 lm	83 lm/W				•		2041-B-A-389-XX
	73 W	40°	2700 K	5970 lm	81 lm/W	•					2041-C-3-387-XX
			3000 K	5970 lm	81 lm/W	•					2041-C-3-388-XX
			4000 K	6370 lm	87 lm/W	•					2041-C-3-389-XX
			2700 K	5970 lm	81 lm/W		•				2041-C-4-387-XX
			3000 K	5970 lm	81 lm/W		•				2041-C-4-388-XX
			4000 K	6370 lm	87 lm/W		•				2041-C-4-389-XX
			2700 K	5970 lm	81 lm/W			•			2041-C-5-387-XX
			3000 K	5970 lm	81 lm/W			•			2041-C-5-388-XX
			4000 K	6370 lm	87 lm/W			•			2041-C-5-389-XX
			2700 K	5970 lm	81 lm/W				•		2041-C-A-387-XX
			3000 K	5970 lm	81 lm/W				•		2041-C-A-388-XX
			4000 K	6370 lm	87 lm/W				•		2041-C-A-389-XX
	73 W	44°/15°	2700 K	5810 lm	79 lm/W	•					2041-H-3-387-XX
			3000 K	5810 lm	79 lm/W	•					2041-H-3-388-XX
			4000 K	6190 lm	84 lm/W	•					2041-H-3-389-XX
			2700 K	5810 lm	79 lm/W		•				2041-H-4-387-XX
			3000 K	5810 lm	79 lm/W		•				2041-H-4-388-XX
			4000 K	6190 lm	84 lm/W		•				2041-H-4-389-XX
			2700 K	5810 lm	79 lm/W			•			2041-H-5-387-XX
			3000 K	5810 lm	79 lm/W			•			2041-H-5-388-XX
			4000 K	6190 lm	84 lm/W			•			2041-H-5-389-XX
			2700 K	5810 lm	79 lm/W				•		2041-H-A-387-XX
			3000 K	5810 lm	79 lm/W				•		2041-H-A-388-XX
			4000 K	6190 lm	84 lm/W				•		2041-H-A-389-XX
	73 W	15°/44°	2700 K	5810 lm	79 lm/W	•					2041-N-3-387-XX
			3000 K	5810 lm	79 lm/W	•					2041-N-3-388-XX
			4000 K	6190 lm	84 lm/W	•					2041-N-3-389-XX
			2700 K	5810 lm	79 lm/W		•				2041-N-4-387-XX
			3000 K	5810 lm	79 lm/W		•				2041-N-4-388-XX
			4000 K	6190 lm	84 lm/W		•				2041-N-4-389-XX

SPACE

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller					Ordering Code			
										CASAMBI	REMOTE				
Medium SPACE	OD-2041	 High Power	73 W	15°/44°	2700 K	5810 lm	79 lm/W						2041-N-5-387-XX 2041-N-5-388-XX 2041-N-5-389-XX		
	3000 K				5810 lm	79 lm/W									
	4000 K				6190 lm	84 lm/W									
	2700 K				5810 lm	79 lm/W				•		2041-N-A-387-XX 2041-N-A-388-XX 2041-N-A-389-XX			
	3000 K				5810 lm	79 lm/W									
	4000 K				6190 lm	84 lm/W									






ATOM


- CEILING RECESSED
- INGROUND
- UNDERWATER



ATOM is a ground / ceiling recess indicator light and is also suitable for under water light application. **ATOM** has been designed and manufactured at highest attribute. Utilizing CNC lathed stainless steel body presented exceptional aesthetic as well as sleek tough feeling. LED chips and lenses are from world renowned manufacturers. GFR polymer recess kit allows it to be installed in most extreme environment. Ensuring integrity of manufacture **ATOM** is supplied with a factory fitted pre-wired cable for ease of installation. The Anti-Humidity wiring system eliminates condensation inside the housing and prolong the life time of the luminaire. An optional IP68 connectors is recommended as an accessory for trouble free installation.



www.unilamp.co.th/en/p/atom

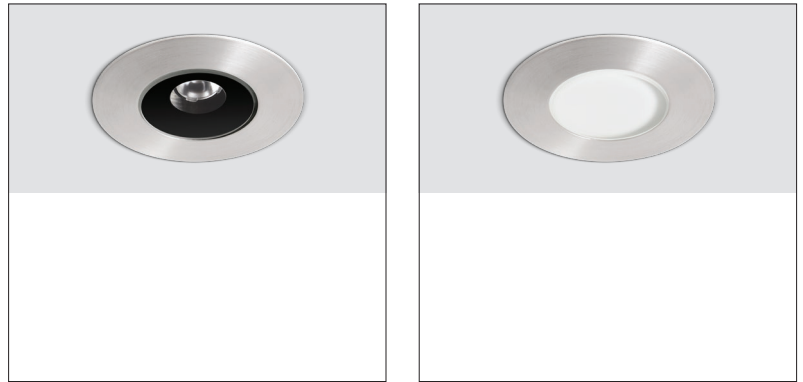

Specification

- Designed, manufactured and tested according to IEC 60598
- Marine grade 316 stainless steel body and screws.
- GFR polymer recess housing.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module.
- Remote driver – constant current / constant voltage.
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.
- For ground recess application, the water drainage system must be tested to ensure that it is working sufficiency and efficiency.




The Tara Chaengwattana, Bangkok – THAILAND

ATOM



ATOM – CC / CV

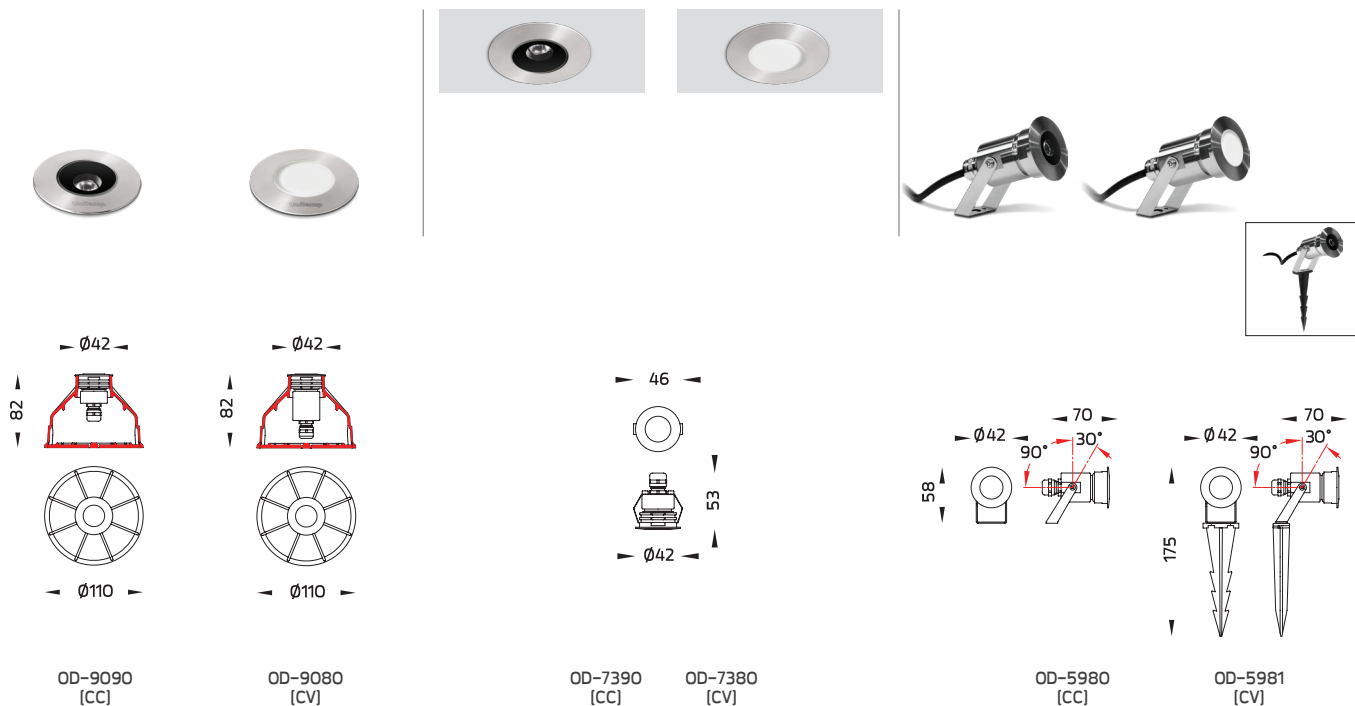

ATOM

Application Type : Inground
Subgroup : Up light

ATOM – CC / 9090
ATOM – CV / 9080

Luminaire Performance

8 – 140 lm
2 – 2.3 W
3 – 70 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K/ Blue

Controller

Remote

Input Options

700mA, 2.98Vdc, Uin max 50Vdc
12Vdc/24Vdc

ATOM


Application Type : Ceiling recessed
Subgroup : General ceiling light /
Directed ceiling light

ATOM – CC / 7390
ATOM – CV / 7380

Luminaire Performance

59 – 140 lm
2 – 2.1 W
28 – 70 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

Remote

Input Options

700mA, 2.98Vdc, Uin max 50Vdc
12Vdc/24Vdc

ATOM


Application Type : Underwater
Subgroup : Projector

ATOM – CC / 5980
ATOM – CV / 5981

Luminaire Performance

59 – 140 lm
2 – 2.1 W
28 – 70 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K


Controller

Remote

Input Options


700mA, 2.98Vdc, Uin max 50Vdc
12Vdc/24Vdc

Accessories





ATOM – CC / CV

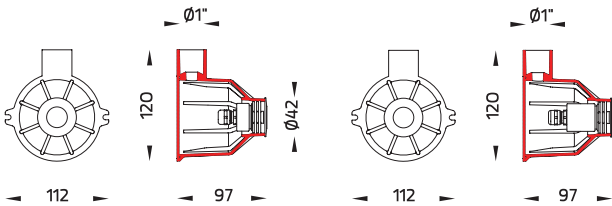

OD-7481
[CC]

OD-7480
[CV]

ATOM

Application Type : Underwater
Subgroup : Wall recessed

ATOM – CC / 7481	
ATOM – CV / 7480	
Luminaire Performance	
59 – 190 lm	
2 – 3.3 W	
28 – 70 lm/W	
Beam Options	
Medium	Wide
Elliptical H	
Color Temperature	
2700K/ 3000K/ 4000K	
Controller	
Remote	
Input Options	
700mA, 2.84Vdc, Uin max 50Vdc	
700mA, 2.98Vdc, Uin max 50Vdc	
12Vdc/24Vdc	

Accessories		
	Softening filter	Distribution box
	CC Driver	CV Driver
	IP68 Connector	

ATOM

ATOM - CC

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller	Ordering Code
						REMOTE	
OD-5980 	2 W	15°	3000 K	140 lm	70 lm/W	•	5980-A-2-469-91
	2.1 W	N/A	2700 K	59 lm	28 lm/W	•	5980-O-2-525-91
			4000 K	59 lm	28 lm/W	•	5980-O-2-899-91
			3000 K	59 lm	28 lm/W	•	5980-O-2-989-91
		28°	2700 K	120 lm	57 lm/W	•	5980-B-2-525-91
			4000 K	120 lm	57 lm/W	•	5980-B-2-899-91
			3000 K	120 lm	57 lm/W	•	5980-B-2-989-91
	2.1 W	37°	3000 K	130 lm	61 lm/W	•	5980-C-2-989-91
	2.1 W	47°	2700 K	130 lm	61 lm/W	•	5980-D-2-525-91
			4000 K	130 lm	61 lm/W	•	5980-D-2-899-91
			3000 K	130 lm	61 lm/W	•	5980-D-2-989-91
		46°/27°	2700 K	110 lm	52 lm/W	•	5980-H-2-525-91
			4000 K	110 lm	52 lm/W	•	5980-H-2-899-91
			3000 K	110 lm	52 lm/W	•	5980-H-2-989-91
OD-7390 	2 W	15°	3000 K	140 lm	70 lm/W	•	7390-A-2-469-91
	2.1 W	N/A	2700 K	59 lm	28 lm/W	•	7390-O-2-525-91
			3000 K	59 lm	28 lm/W	•	7390-O-2-989-91
OD-7481 	2 W	15°	3000 K	140 lm	70 lm/W	•	7481-A-2-469-91
	2.1 W	N/A	2700 K	59 lm	28 lm/W	•	7481-O-2-525-91
			4000 K	59 lm	28 lm/W	•	7481-O-2-899-91
			3000 K	59 lm	28 lm/W	•	7481-O-2-989-91
		28°	2700 K	120 lm	57 lm/W	•	7481-B-2-525-91
			4000 K	120 lm	57 lm/W	•	7481-B-2-899-91
			3000 K	120 lm	57 lm/W	•	7481-B-2-989-91
	2.1 W	37°	2700 K	130 lm	61 lm/W	•	7481-C-2-525-91
			3000 K	130 lm	61 lm/W	•	7481-C-2-989-91
		47°	2700 K	130 lm	61 lm/W	•	7481-D-2-525-91
			4000 K	130 lm	61 lm/W	•	7481-D-2-899-91
		46°/27°	3000 K	130 lm	61 lm/W	•	7481-D-2-989-91
			2700 K	110 lm	52 lm/W	•	7481-H-2-525-91
OD-9090 	2.1 W	N/A	2700 K	110 lm	52 lm/W	•	7481-H-2-899-91
			4000 K	110 lm	52 lm/W	•	7481-H-2-989-91
			3000 K	110 lm	52 lm/W	•	7481-H-2-989-91
		28°	2700 K	110 lm	52 lm/W	•	7481-H-2-989-91
			4000 K	110 lm	52 lm/W	•	7481-H-2-989-91
			3000 K	110 lm	52 lm/W	•	7481-H-2-989-91
	2.1 W	47°	2700 K	110 lm	52 lm/W	•	7481-H-2-989-91
			4000 K	110 lm	52 lm/W	•	7481-H-2-989-91
			3000 K	110 lm	52 lm/W	•	7481-H-2-989-91
		46°/27°	2700 K	110 lm	52 lm/W	•	7481-H-2-989-91
			4000 K	110 lm	52 lm/W	•	7481-H-2-989-91
			3000 K	110 lm	52 lm/W	•	7481-H-2-989-91
	2.3 W	N/A	Blue	8 lm	3 lm/W	•	9090-O-2-992-91
OD-5981 	2 W	15°	3000 K	140 lm	70 lm/W	•	5981-A-2-470-91
	2.1 W	N/A	2700 K	59 lm	28 lm/W	•	5981-O-2-525-91
			4000 K	59 lm	28 lm/W	•	5981-O-2-899-91
			3000 K	59 lm	28 lm/W	•	5981-O-2-989-91
		28°	2700 K	120 lm	57 lm/W	•	5981-B-2-525-91
			4000 K	120 lm	57 lm/W	•	5981-B-2-899-91
			3000 K	120 lm	57 lm/W	•	5981-B-2-989-91
	2.1 W	47°	2700 K	130 lm	61 lm/W	•	5981-D-2-525-91
			4000 K	130 lm	61 lm/W	•	5981-D-2-899-91
			3000 K	130 lm	61 lm/W	•	5981-D-2-989-91
		46°/27°	2700 K	110 lm	52 lm/W	•	5981-H-2-525-91
			4000 K	110 lm	52 lm/W	•	5981-H-2-899-91
			3000 K	110 lm	52 lm/W	•	5981-H-2-989-91
OD-7380 	2.1 W	N/A	4000 K	59 lm	28 lm/W	•	7380-O-2-899-91
			3000 K	59 lm	28 lm/W	•	7380-O-2-989-91
OD-7480 	2 W	15°	3000 K	140 lm	70 lm/W	•	7480-A-2-470-91
	3.3 W	N/A	2700 K	100 lm	30 lm/W	•	7480-O-2-525-91
			4000 K	100 lm	30 lm/W	•	7480-O-2-899-91
			3000 K	100 lm	30 lm/W	•	7480-O-2-989-91
		28°	2700 K	170 lm	51 lm/W	•	7480-B-2-525-91
			4000 K	180 lm	54 lm/W	•	7480-B-2-899-91
			3000 K	170 lm	51 lm/W	•	7480-B-2-989-91
		37°	3000 K	180 lm	54 lm/W	•	7480-C-2-989-91

*Please contact sales team for special request.

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller	Ordering Code
							REMOTE	
ATOM – CC	OD-7480	3.3 W	47°	2700 K	180 lm	54 lm/W	•	7480-D-2-525-91
	4000 K			190 lm	57 lm/W	7480-D-2-899-91		
	3000 K			180 lm	54 lm/W	7480-D-2-989-91		
	46°/27°		2700 K	150 lm	45 lm/W	•	7480-H-2-525-91	
			4000 K	160 lm	48 lm/W		7480-H-2-899-91	
			3000 K	150 lm	45 lm/W		7480-H-2-989-91	
	OD-9080	2 W	15°	3000 K	140 lm	70 lm/W	•	9080-A-2-470-91
		2.1 W	N/A	2700 K	59 lm	28 lm/W	•	9080-O-2-525-91
			N/A	4000 K	59 lm	28 lm/W	•	9080-O-2-899-91
			N/A	3000 K	59 lm	28 lm/W	•	9080-O-2-989-91
			28°	2700 K	120 lm	57 lm/W	•	9080-B-2-525-91
			28°	4000 K	120 lm	57 lm/W	•	9080-B-2-899-91
			28°	3000 K	120 lm	57 lm/W	•	9080-B-2-989-91
			37°	3000 K	130 lm	61 lm/W	•	9080-C-2-989-91
		2.1 W	47°	2700 K	130 lm	61 lm/W	•	9080-D-2-525-91
			47°	4000 K	130 lm	61 lm/W	•	9080-D-2-899-91
			47°	3000 K	130 lm	61 lm/W	•	9080-D-2-989-91
			46°/27°	2700 K	110 lm	52 lm/W	•	9080-H-2-525-91
			46°/27°	4000 K	110 lm	52 lm/W	•	9080-H-2-899-91
			46°/27°	3000 K	110 lm	52 lm/W	•	9080-H-2-989-91



Courtyard by Marriott, Aravali Resort, NCR, Delhi – INDIA

VOLGA

■ UNDERWATER



VOLGA is a family of robust marine grade stainless steel underwater luminaires with ground/wall mount fixing. It utilizes high power LED in 2700K, 3000K or 4000K with high quality optical lenses offering narrow, medium, wide light distributions as well as elliptical beam.

VOLGA is a perfect choice to illuminate swimming pools, decorative pools and fountains. To avoid installation issues and add another level of safety, **VOLGA** is pre-wired and sealed from the factory. It must be operated in a submersible state at all time to protect an over-heating of the luminaire body. The marine grade 316 stainless steel body guarantees corrosion free appearance through out the lifetime.



We highly recommend that the luminaire lay out should be considered during specifying and planning processes. Installation work must be carried out under national safety regulations.



www.unilamp.co.th/en/p/volga

Specification


- Designed, manufactured and tested according to IEC 60598.
- Marine grade 316 stainless steel body and screws.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module.
- Remote driver – constant current (available separately).
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.
- To avoid over-heating, this luminaire must be used under water only.

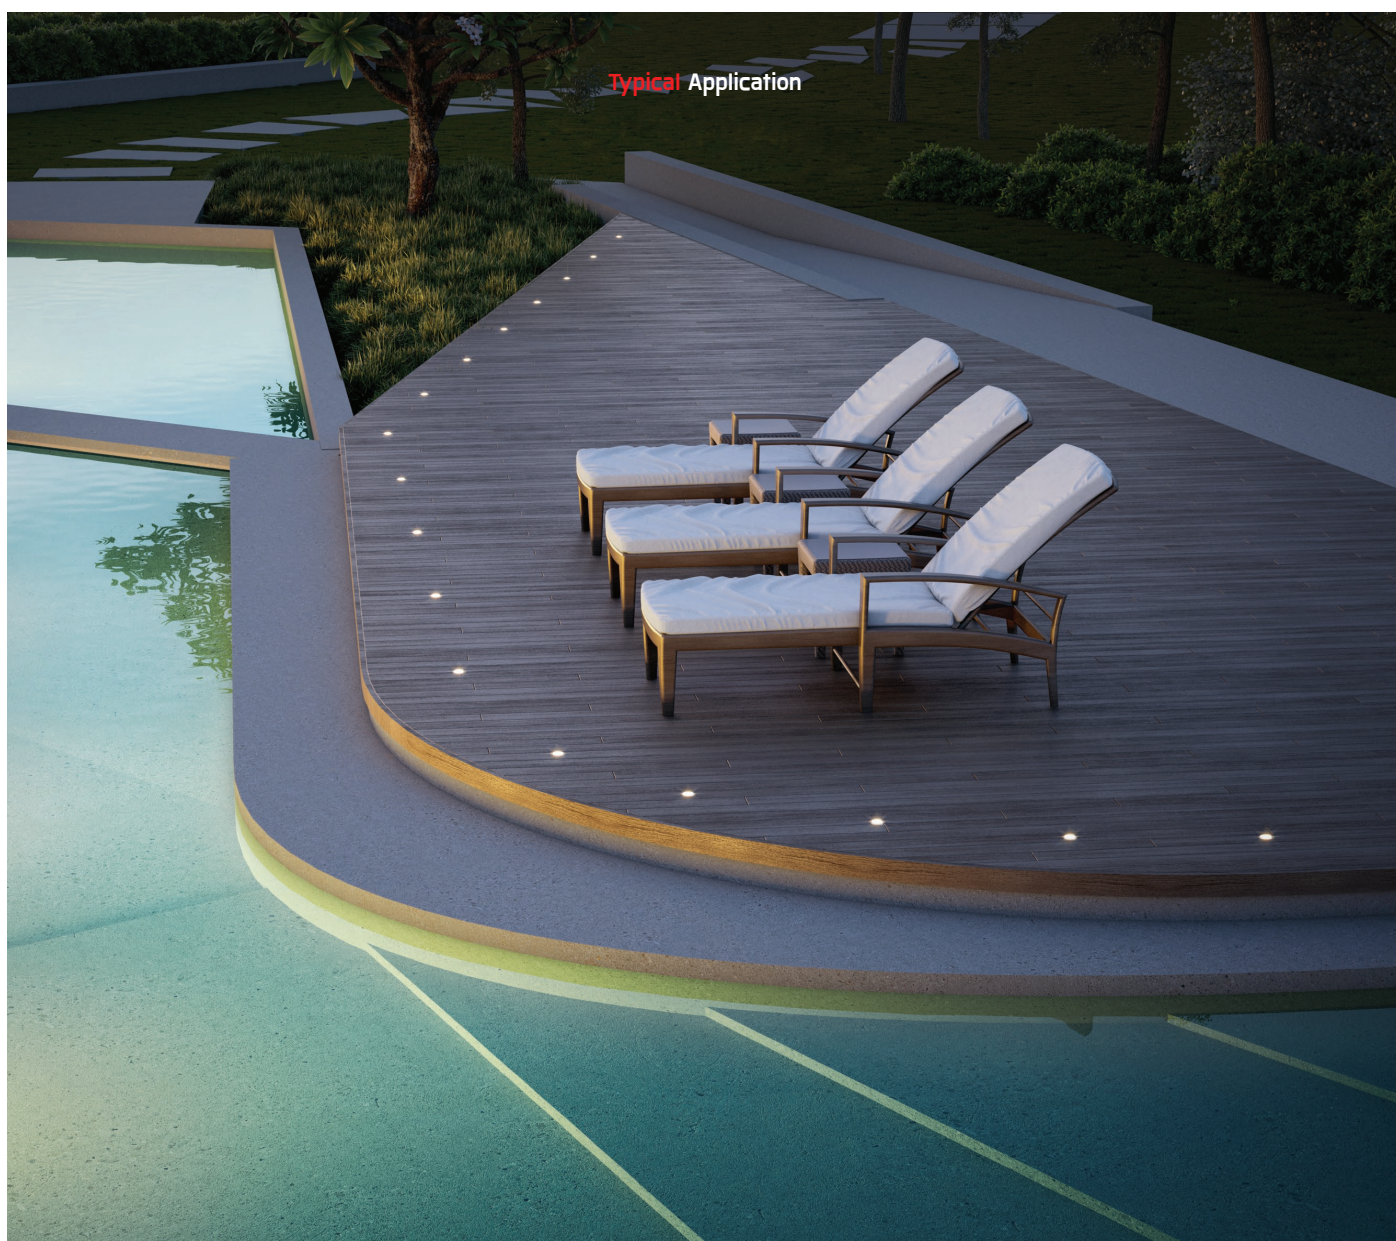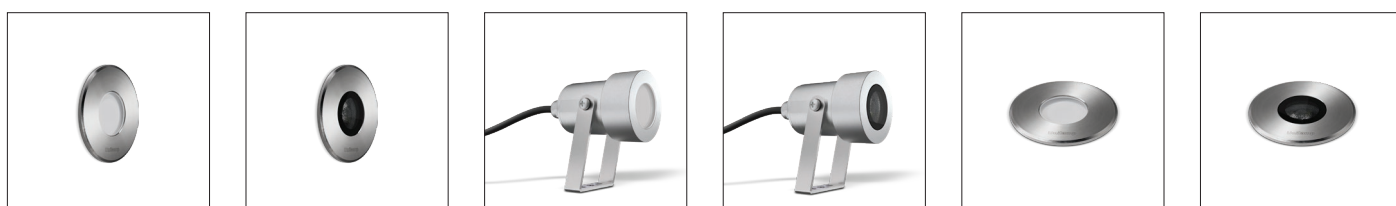

VOLGA



VOLGA – CV / CC




VOLGA	
Application Type : Underwater	
Subgroup : Wall recessed	
VOLGA – CV / 7418	
VOLGA – CC / 7419	
Luminaire Performance	
35 – 430 lm	
2.2 – 5.8 W	
6 – 90 lm/W	
Beam Options	
Narrow	Medium
Wide	Elliptical H
Asymmetric	
Color Temperature	
2700K/ 3000K/ 4000K	
Controller	
Remote	
Input Voltage	
24Vdc	
500mA, 11.55Vdc, Uin max 50Vdc	
700mA, 3.04Vdc, Uin max 50Vdc	
1200mA, 3.17Vdc, Uin max 50Vdc	

Accessories			
	Honey comb louver		Softening filter
	CV Driver		CC Driver
	IP68 Connector		



VOLGA – CV / CC



VOLGA

Application Type : Underwater
Subgroup : Projector


VOLGA – CV / 7430	
VOLGA – CC / 7431	
Luminaire Performance	
35 – 430 lm	
2.2 – 5.8 W	
6 – 90 lm/W	
Beam Options	
Narrow	Medium
Wide	Elliptical H
Elliptical V	
Color Temperature	
2700K/ 3000K/ 4000K	
Controller	
Remote	
Input Voltage	
24Vdc	
500mA, 11.55Vdc, Uin max 50Vdc	
700mA, 3.04Vdc, Uin max 50Vdc	
1200mA, 3.17Vdc, Uin max 50Vdc	

Accessories			
	Honey comb louver		Softening filter
	CV Driver		CC Driver
	IP68 Connector		

VOLGA



VOLGA – CV / CC



VOLGA

Application Type : Inground

Subgroup : Up light

VOLGA – CV / 9007	
VOLGA – CC / 9008	
Luminaire Performance	
35 – 340 lm	
2.2 – 3.9 W	
10 – 90 lm/W	
Beam Options	
Narrow	Medium
Wide	Elliptical H
Asymmetric	
Color Temperature	
2700K/ 3000K/ 4000K	
Controller	
Remote	
Input Voltage	
24Vdc	
700mA, 3.04Vdc, Uin max 50Vdc	
1200mA, 3.17Vdc, Uin max 50Vdc	

Accessories			
	Honey comb louver		Softening filter
	CV Driver		CC Driver
	IP68 Connector		

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller	Ordering Code
							REMOTE	
VOLGA - CV	OD-7418							
		2.2 W	5°	3000 K	70 lm	31 lm/W	.	7418-4-2-361-91
		3.3 W	10°	2700 K	280 lm	84 lm/W	.	7418-A-2-429-91
				3000 K	280 lm	84 lm/W	.	7418-A-2-430-91
		3.3 W	30°	4000 K	290 lm	87 lm/W	.	7418-A-2-431-91
				2700 K	270 lm	81 lm/W	.	7418-6-2-429-91
				3000 K	270 lm	81 lm/W	.	7418-6-2-430-91
		3.3 W	43°	4000 K	280 lm	84 lm/W	.	7418-6-2-431-91
				2700 K	290 lm	87 lm/W	.	7418-C-2-429-91
				3000 K	290 lm	87 lm/W	.	7418-C-2-430-91
		3.3 W	Asymmetric	4000 K	300 lm	90 lm/W	.	7418-C-2-431-91
				2700 K	150 lm	45 lm/W	.	7418-U-2-429-91
				3000 K	150 lm	45 lm/W	.	7418-U-2-430-91
		3.3 W	40°/20°	4000 K	160 lm	48 lm/W	.	7418-U-2-431-91
				2700 K	270 lm	81 lm/W	.	7418-H-2-429-91
				3000 K	270 lm	81 lm/W	.	7418-H-2-430-91
		3.3 W	N/A	4000 K	280 lm	84 lm/W	.	7418-H-2-431-91
				2700 K	35 lm	10 lm/W	.	7418-O-2-429-91
				3000 K	35 lm	10 lm/W	.	7418-O-2-430-91
		5.8 W	18°	4000 K	40 lm	12 lm/W	.	7418-O-2-431-91
				2700 K	360 lm	62 lm/W	.	7418-B-2-372-91
				3000 K	390 lm	67 lm/W	.	7418-B-2-373-91
		5.8 W	43°	4000 K	420 lm	72 lm/W	.	7418-B-2-374-91
				2700 K	370 lm	63 lm/W	.	7418-C-2-372-91
				3000 K	400 lm	68 lm/W	.	7418-C-2-373-91
		5.8 W	Asymmetric	4000 K	430 lm	74 lm/W	.	7418-C-2-374-91
				2700 K	190 lm	32 lm/W	.	7418-U-2-372-91
				3000 K	210 lm	36 lm/W	.	7418-U-2-373-91
		5.8 W	40°/20°	4000 K	220 lm	37 lm/W	.	7418-U-2-374-91
				2700 K	330 lm	56 lm/W	.	7418-H-2-372-91
				3000 K	360 lm	62 lm/W	.	7418-H-2-373-91
		5.8 W	N/A	4000 K	390 lm	67 lm/W	.	7418-H-2-374-91
				2700 K	40 lm	6 lm/W	.	7418-O-2-372-91
				3000 K	50 lm	8 lm/W	.	7418-O-2-373-91
				4000 K	50 lm	8 lm/W	.	7418-O-2-374-91
VOLGA - CC	OD-7419							
		2.2 W	5°	3000 K	70 lm	31 lm/W	.	7419-4-2-355-91
		3.9 W	10°	2700 K	310 lm	79 lm/W	.	7419-A-2-561-91
				3000 K	310 lm	79 lm/W	.	7419-A-2-562-91
		3.9 W	30°	4000 K	330 lm	84 lm/W	.	7419-A-2-563-91
				2700 K	300 lm	76 lm/W	.	7419-6-2-561-91
				3000 K	300 lm	76 lm/W	.	7419-6-2-562-91
		3.9 W	43°	4000 K	320 lm	82 lm/W	.	7419-6-2-563-91
				2700 K	320 lm	82 lm/W	.	7419-C-2-561-91
				3000 K	320 lm	82 lm/W	.	7419-C-2-562-91
		3.9 W	Asymmetric	4000 K	340 lm	87 lm/W	.	7419-C-2-563-91
				2700 K	170 lm	43 lm/W	.	7419-U-2-561-91
				3000 K	170 lm	43 lm/W	.	7419-U-2-562-91
		3.9 W	40°/20°	4000 K	180 lm	46 lm/W	.	7419-U-2-563-91
				2700 K	300 lm	76 lm/W	.	7419-H-2-561-91
				3000 K	300 lm	76 lm/W	.	7419-H-2-562-91
		3.9 W	N/A	4000 K	320 lm	82 lm/W	.	7419-H-2-563-91
				2700 K	40 lm	10 lm/W	.	7419-O-2-561-91
				3000 K	40 lm	10 lm/W	.	7419-O-2-562-91
		5.8 W	18°	4000 K	45 lm	11 lm/W	.	7419-O-2-563-91
				2700 K	360 lm	62 lm/W	.	7419-B-2-366-91
				3000 K	390 lm	67 lm/W	.	7419-B-2-367-91
		5.8 W	43°	4000 K	420 lm	72 lm/W	.	7419-B-2-368-91
				2700 K	370 lm	63 lm/W	.	7419-C-2-366-91
				3000 K	400 lm	68 lm/W	.	7419-C-2-367-91
		5.8 W	Asymmetric	4000 K	430 lm	74 lm/W	.	7419-C-2-368-91
				2700 K	190 lm	32 lm/W	.	7419-U-2-366-91
				3000 K	210 lm	36 lm/W	.	7419-U-2-367-91
		5.8 W	40°/20°	4000 K	220 lm	37 lm/W	.	7419-U-2-368-91
				2700 K	330 lm	56 lm/W	.	7419-H-2-366-91
				3000 K	360 lm	62 lm/W	.	7419-H-2-367-91
		5.8 W	N/A	4000 K	390 lm	67 lm/W	.	7419-H-2-368-91
				2700 K	40 lm	6 lm/W	.	7419-O-2-366-91
				3000 K	50 lm	8 lm/W	.	7419-O-2-367-91
				4000 K	50 lm	8 lm/W	.	7419-O-2-368-91

*Please contact sales team for special request.

VOLGA

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller	Ordering Code
							REMOTE	
VOLGA – CV	OD-7430							
		2.2 W	5°	3000 K	70 lm	31 lm/W	.	7430-4-2-361-91
		3.3 W	10°	2700 K	280 lm	84 lm/W	.	7430-A-2-429-91
				3000 K	280 lm	84 lm/W	.	7430-A-2-430-91
				4000 K	290 lm	87 lm/W	.	7430-A-2-431-91
		3.3 W	30°	2700 K	270 lm	81 lm/W	.	7430-6-2-429-91
				3000 K	270 lm	81 lm/W	.	7430-6-2-430-91
				4000 K	280 lm	84 lm/W	.	7430-6-2-431-91
		3.3 W	43°	2700 K	290 lm	87 lm/W	.	7430-C-2-429-91
				3000 K	290 lm	87 lm/W	.	7430-C-2-430-91
				4000 K	300 lm	90 lm/W	.	7430-C-2-431-91
		3.3 W	40°/20°	2700 K	270 lm	81 lm/W	.	7430-H-2-429-91
				3000 K	270 lm	81 lm/W	.	7430-H-2-430-91
				4000 K	280 lm	84 lm/W	.	7430-H-2-431-91
		3.3 W	20°/40°	2700 K	270 lm	81 lm/W	.	7430-N-2-429-91
				3000 K	270 lm	81 lm/W	.	7430-N-2-430-91
				4000 K	280 lm	84 lm/W	.	7430-N-2-431-91
		3.3 W	N/A	2700 K	35 lm	10 lm/W	.	7430-O-2-429-91
				3000 K	35 lm	10 lm/W	.	7430-O-2-430-91
				4000 K	40 lm	12 lm/W	.	7430-O-2-431-91
		5.8 W	18°	2700 K	360 lm	62 lm/W	.	7430-B-2-372-91
				3000 K	390 lm	67 lm/W	.	7430-B-2-373-91
				4000 K	420 lm	72 lm/W	.	7430-B-2-374-91
		5.8 W	43°	2700 K	370 lm	63 lm/W	.	7430-C-2-372-91
				3000 K	400 lm	68 lm/W	.	7430-C-2-373-91
				4000 K	430 lm	74 lm/W	.	7430-C-2-374-91
		5.8 W	40°/20°	2700 K	330 lm	56 lm/W	.	7430-H-2-372-91
				3000 K	360 lm	62 lm/W	.	7430-H-2-373-91
				4000 K	390 lm	67 lm/W	.	7430-H-2-374-91
		5.8 W	20°/40°	2700 K	330 lm	56 lm/W	.	7430-N-2-372-91
				3000 K	360 lm	62 lm/W	.	7430-N-2-373-91
				4000 K	390 lm	67 lm/W	.	7430-N-2-374-91
		5.8 W	N/A	2700 K	40 lm	6 lm/W	.	7430-O-2-372-91
				3000 K	50 lm	8 lm/W	.	7430-O-2-373-91
				4000 K	50 lm	8 lm/W	.	7430-O-2-374-91
VOLGA – CC	OD-7431							
		2.2 W	5°	3000 K	70 lm	31 lm/W	.	7431-4-2-355-91
		3.9 W	10°	2700 K	310 lm	79 lm/W	.	7431-A-2-561-91
				3000 K	310 lm	79 lm/W	.	7431-A-2-562-91
				4000 K	330 lm	84 lm/W	.	7431-A-2-563-91
		3.9 W	30°	2700 K	300 lm	76 lm/W	.	7431-6-2-561-91
				3000 K	300 lm	76 lm/W	.	7431-6-2-562-91
				4000 K	320 lm	82 lm/W	.	7431-6-2-563-91
		3.9 W	43°	2700 K	320 lm	82 lm/W	.	7431-C-2-561-91
				3000 K	320 lm	82 lm/W	.	7431-C-2-562-91
				4000 K	340 lm	87 lm/W	.	7431-C-2-563-91
		3.9 W	40°/20°	2700 K	300 lm	76 lm/W	.	7431-H-2-561-91
				3000 K	300 lm	76 lm/W	.	7431-H-2-562-91
				4000 K	320 lm	82 lm/W	.	7431-H-2-563-91
		3.9 W	20°/40°	2700 K	300 lm	76 lm/W	.	7431-N-2-561-91
				3000 K	300 lm	76 lm/W	.	7431-N-2-562-91
				4000 K	320 lm	82 lm/W	.	7431-N-2-563-91
		3.9 W	N/A	2700 K	40 lm	10 lm/W	.	7431-O-2-561-91
				3000 K	40 lm	10 lm/W	.	7431-O-2-562-91
				4000 K	45 lm	11 lm/W	.	7431-O-2-563-91
		5.8 W	18°	2700 K	360 lm	62 lm/W	.	7431-B-2-366-91
				3000 K	390 lm	67 lm/W	.	7431-B-2-367-91
				4000 K	420 lm	72 lm/W	.	7431-B-2-368-91
		5.8 W	43°	2700 K	370 lm	63 lm/W	.	7431-C-2-366-91
				3000 K	400 lm	68 lm/W	.	7431-C-2-367-91
				4000 K	430 lm	74 lm/W	.	7431-C-2-368-91
		5.8 W	40°/20°	2700 K	330 lm	56 lm/W	.	7431-H-2-366-91
				3000 K	360 lm	62 lm/W	.	7431-H-2-367-91
				4000 K	390 lm	67 lm/W	.	7431-H-2-368-91
		5.8 W	20°/40°	2700 K	330 lm	56 lm/W	.	7431-N-2-366-91
				3000 K	360 lm	62 lm/W	.	7431-N-2-367-91
				4000 K	390 lm	67 lm/W	.	7431-N-2-368-91
		5.8 W	N/A	2700 K	40 lm	6 lm/W	.	7431-O-2-366-91
				3000 K	50 lm	8 lm/W	.	7431-O-2-367-91
				4000 K	50 lm	8 lm/W	.	7431-O-2-368-91

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller	Ordering Code
							REMOTE	
VOLGA – CV	OD-9007							
		2.2 W	5°	3000 K	70 lm	31 lm/W	•	9007-4-2-361-91
		3.3 W	10°	2700 K	280 lm	84 lm/W	•	9007-A-2-429-91
				3000 K	280 lm	84 lm/W	•	9007-A-2-430-91
				4000 K	290 lm	87 lm/W	•	9007-A-2-431-91
		3.3 W	30°	2700 K	270 lm	81 lm/W	•	9007-6-2-429-91
				3000 K	270 lm	81 lm/W	•	9007-6-2-430-91
				4000 K	280 lm	84 lm/W	•	9007-6-2-431-91
		3.3 W	43°	2700 K	290 lm	87 lm/W	•	9007-C-2-429-91
				3000 K	290 lm	87 lm/W	•	9007-C-2-430-91
				4000 K	300 lm	90 lm/W	•	9007-C-2-431-91
		3.3 W	Asymmetric	2700 K	150 lm	45 lm/W	•	9007-U-2-429-91
				3000 K	150 lm	45 lm/W	•	9007-U-2-430-91
				4000 K	160 lm	48 lm/W	•	9007-U-2-431-91
		3.3 W	40°/20°	2700 K	270 lm	81 lm/W	•	9007-H-2-429-91
				3000 K	270 lm	81 lm/W	•	9007-H-2-430-91
				4000 K	280 lm	84 lm/W	•	9007-H-2-431-91
		3.3 W	N/A	2700 K	35 lm	10 lm/W	•	9007-O-2-429-91
				3000 K	35 lm	10 lm/W	•	9007-O-2-430-91
				4000 K	40 lm	12 lm/W	•	9007-O-2-431-91
VOLGA – CC	OD-9008							
		2.2 W	5°	3000 K	70 lm	31 lm/W	•	9008-4-2-355-91
		3.9 W	10°	2700 K	310 lm	79 lm/W	•	9008-A-2-561-91
				3000 K	310 lm	79 lm/W	•	9008-A-2-562-91
				4000 K	330 lm	84 lm/W	•	9008-A-2-563-91
		3.9 W	30°	2700 K	300 lm	76 lm/W	•	9008-6-2-561-91
				3000 K	300 lm	76 lm/W	•	9008-6-2-562-91
				4000 K	320 lm	82 lm/W	•	9008-6-2-563-91
		3.9 W	43°	2700 K	320 lm	82 lm/W	•	9008-C-2-561-91
				3000 K	320 lm	82 lm/W	•	9008-C-2-562-91
				4000 K	340 lm	87 lm/W	•	9008-C-2-563-91
		3.9 W	Asymmetric	2700 K	170 lm	43 lm/W	•	9008-U-2-561-91
				3000 K	170 lm	43 lm/W	•	9008-U-2-562-91
				4000 K	180 lm	46 lm/W	•	9008-U-2-563-91
		3.9 W	40°/20°	2700 K	300 lm	76 lm/W	•	9008-H-2-561-91
				3000 K	300 lm	76 lm/W	•	9008-H-2-562-91
				4000 K	320 lm	82 lm/W	•	9008-H-2-563-91
		3.9 W	N/A	2700 K	40 lm	10 lm/W	•	9008-O-2-561-91
				3000 K	40 lm	10 lm/W	•	9008-O-2-562-91
				4000 K	45 lm	11 lm/W	•	9008-O-2-563-91

POLKA

- INGROUND
- PROJECTOR



POLKA is a family of small sized projector and ground recessed luminaires. The forged aluminum housing exhibits exceptional strength against mechanical impact and corrosion resistance. Several light distributions and color temperatures are available as a standard option. **POLKA** is equipped with the UniBlock anti-humidity-kit for improved reliability and resilience against ingress of moisture.

POLKA as ground recessed luminaires is delivered complete with a GFR polymer installation housing. **POLKA** projector is supplied including a GFR ground spike suitable for installation in soft soil.



www.unilamp.co.th/en/p/polka



Specification


- Extruded aluminium 56063 alloy body with low copper content.
- GFR polymer recess housing.
- Safety glass cover.
- Durable silicone gasket.
- Stainless steel screws.
- High efficiency LED module.
- Remote driver – constant current / constant voltage. [Available separately].
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.
- For ground recess application, the water drainage system must be tested to ensure that it is working sufficiently and efficiently.



Spotlight version supplied with earth spike.



Recess version supplied with recess box.

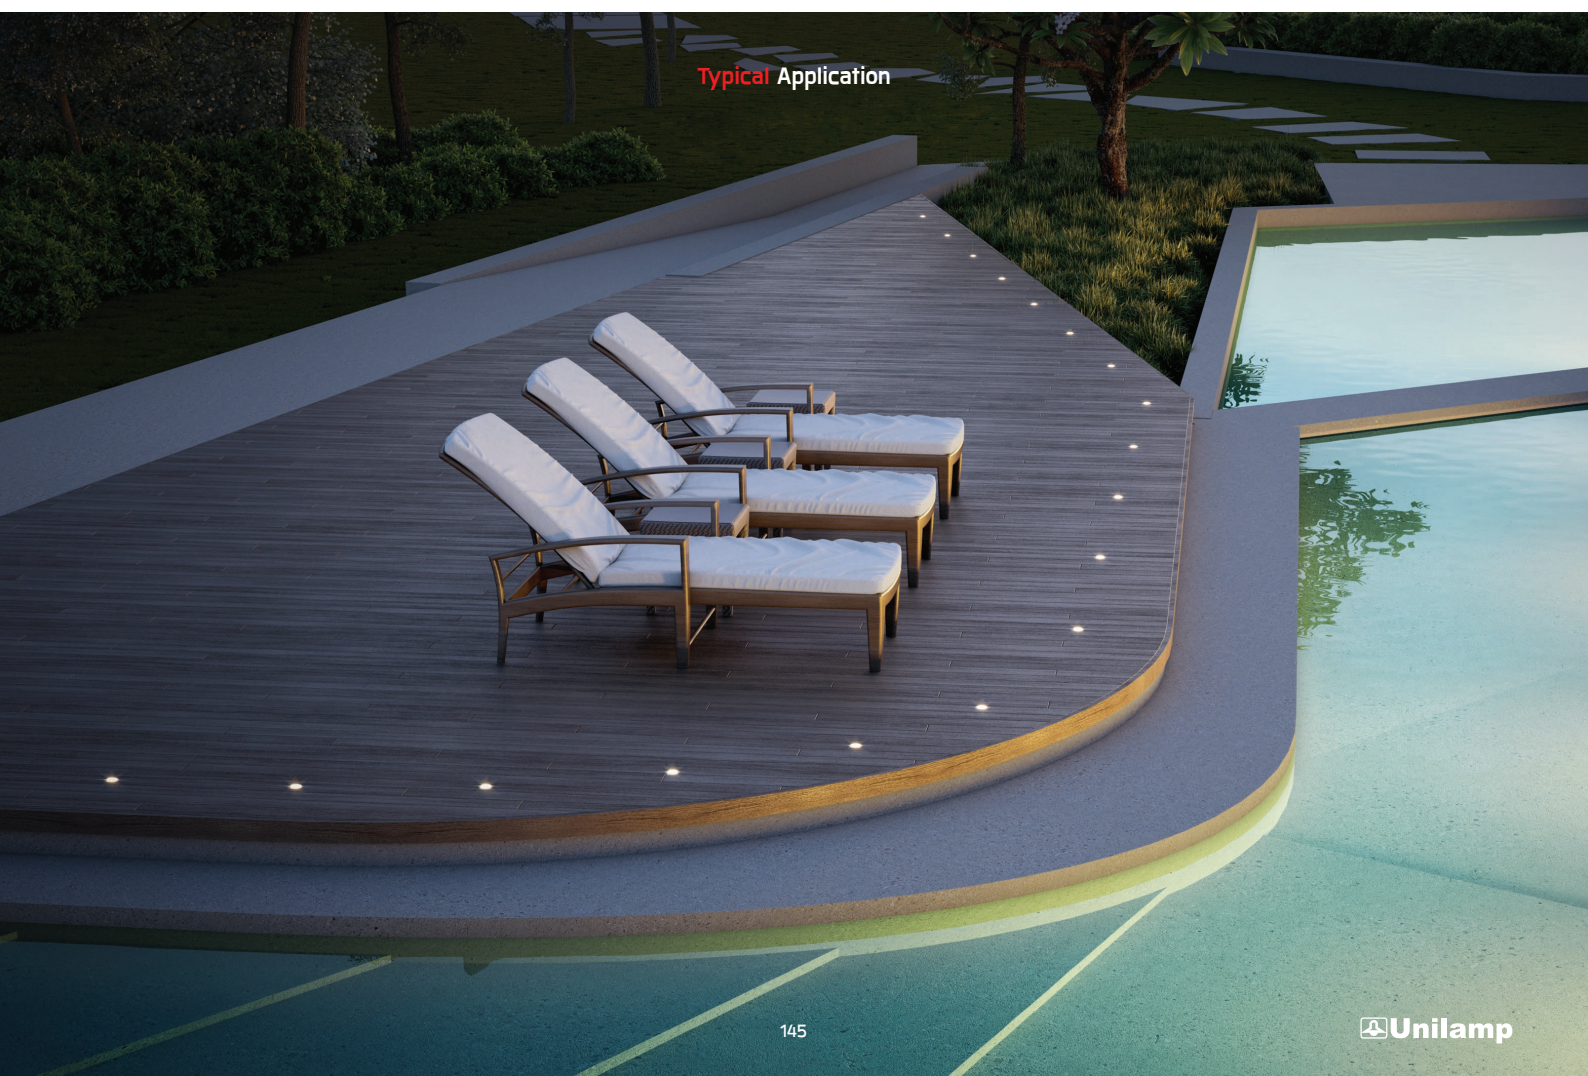


Typical Application

POLKA




POLKA – CC / CV



OD-9081, OD-9082
[CC, CV]

POLKA – CC / CV

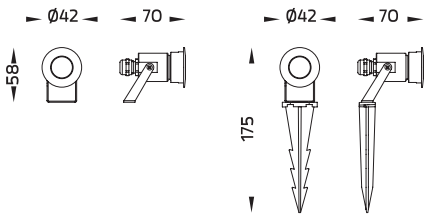

OD-5982, OD-5983
[CC, CV]

POLKA

Application Type : Inground
Subgroup : Up light

POLKA – CC / 9081
POLKA – CV / 9082

Luminaire Performance

59 – 140 lm
2 – 2.1 W
28 – 70 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

Remote

Input Options

700mA, 2.98Vdc, Uin max 50Vdc
24Vdc

POLKA

Application Type : Projector
Subgroup : Circular

POLKA – CC / 5982
POLKA – CV / 5983

Luminaire Performance

59 – 140 lm
2 – 2.1 W
28 – 70 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

Remote

Input Options

700mA, 2.98Vdc, Uin max 50Vdc
24Vdc

Accessories



Softening filter



Distribution box



IP68 Connector



CC Driver



CV Driver

POLKA – CC

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller	Ordering Code
						REMOTE	
OD-5982 	2 W	15°	3000 K	140 lm	70 lm/W	•	5982-A-2-469-13
			2700 K	120 lm	57 lm/W	•	5982-B-2-525-13
			3000 K	120 lm	57 lm/W	•	5982-B-2-989-13
			4000 K	120 lm	57 lm/W	•	5982-B-2-899-13
	2.1 W	45°/27°	2700 K	110 lm	52 lm/W	•	5982-H-2-525-13
			3000 K	110 lm	52 lm/W	•	5982-H-2-989-13
			4000 K	110 lm	52 lm/W	•	5982-H-2-899-13
			2700 K	130 lm	61 lm/W	•	5982-D-2-525-13
			3000 K	130 lm	61 lm/W	•	5982-D-2-989-13
			4000 K	130 lm	61 lm/W	•	5982-D-2-899-13
	2.1 W	N/A	2700 K	59 lm	28 lm/W	•	5982-O-2-525-13
			3000 K	59 lm	28 lm/W	•	5982-O-2-989-13
			4000 K	59 lm	28 lm/W	•	5982-O-2-899-13
OD-9081 	2 W	15°	3000 K	140 lm	70 lm/W	•	9081-A-2-469-13
			2700 K	120 lm	57 lm/W	•	9081-B-2-525-13
			3000 K	120 lm	57 lm/W	•	9081-B-2-989-13
			4000 K	120 lm	57 lm/W	•	9081-B-2-899-13
	2.1 W	45°/27°	2700 K	110 lm	52 lm/W	•	9081-H-2-525-13
			3000 K	110 lm	52 lm/W	•	9081-H-2-989-13
			4000 K	110 lm	52 lm/W	•	9081-H-2-899-13
			2700 K	130 lm	61 lm/W	•	9081-D-2-525-13
			3000 K	130 lm	61 lm/W	•	9081-D-2-989-13
			4000 K	130 lm	61 lm/W	•	9081-D-2-899-13
	2.1 W	N/A	2700 K	59 lm	28 lm/W	•	9081-O-2-525-13
			3000 K	59 lm	28 lm/W	•	9081-O-2-989-13
			4000 K	59 lm	28 lm/W	•	9081-O-2-899-13
OD-5983 	2 W	15°	3000 K	140 lm	70 lm/W	•	5983-A-2-470-13
			2700 K	120 lm	57 lm/W	•	5983-B-2-525-13
			3000 K	120 lm	57 lm/W	•	5983-B-2-989-13
			4000 K	120 lm	57 lm/W	•	5983-B-2-899-13
	2.1 W	45°/27°	2700 K	110 lm	52 lm/W	•	5983-H-2-525-13
			3000 K	110 lm	52 lm/W	•	5983-H-2-989-13
			4000 K	110 lm	52 lm/W	•	5983-H-2-899-13
			2700 K	130 lm	61 lm/W	•	5983-D-2-525-13
			3000 K	130 lm	61 lm/W	•	5983-D-2-989-13
			4000 K	130 lm	61 lm/W	•	5983-D-2-899-13
	2.1 W	N/A	2700 K	59 lm	28 lm/W	•	5983-O-2-525-13
			3000 K	59 lm	28 lm/W	•	5983-O-2-989-13
			4000 K	59 lm	28 lm/W	•	5983-O-2-899-13
OD-9082 	2 W	15°	3000 K	140 lm	70 lm/W	•	9082-A-2-470-13
			2700 K	120 lm	57 lm/W	•	9082-B-2-525-13
			3000 K	120 lm	57 lm/W	•	9082-B-2-989-13
			4000 K	120 lm	57 lm/W	•	9082-B-2-899-13
	2.1 W	45°/27°	2700 K	110 lm	52 lm/W	•	9082-H-2-525-13
			3000 K	110 lm	52 lm/W	•	9082-H-2-989-13
			4000 K	110 lm	52 lm/W	•	9082-H-2-899-13
			2700 K	130 lm	61 lm/W	•	9082-D-2-525-13
			3000 K	130 lm	61 lm/W	•	9082-D-2-989-13
			4000 K	130 lm	61 lm/W	•	9082-D-2-899-13
	2.1 W	N/A	2700 K	59 lm	28 lm/W	•	9082-O-2-525-13
			3000 K	59 lm	28 lm/W	•	9082-O-2-989-13
			4000 K	59 lm	28 lm/W	•	9082-O-2-899-13

*Please contact sales team for special request.



A family of recessed and surface mounted under water luminaires which are commonly used to illuminate swimming pools, decorative pools and fountains. Accessories include several watertight connecting devices. **ACQUA/1** utilizes high power LED in 2700K, 3000K or 4000K and high quality optical lenses offering narrow, medium, wide, asymmetric and elliptical beam. To avoid installation issues and add another level of safety, **ACQUA/1** is pre-wired with an anti-condensation process. To avoid over-heating of the luminaire body, **ACQUA/1** must be operated in a submersible state at all time. The marine grade 316 stainless steel body guarantees corrosion free appearance throughout the life time. We highly recommend that the luminaire lay out should be considered during specifying and planning processes. Installation work must be carried out under national safety regulations.



Specification

- Designed, manufactured and tested according to IEC 60598.
- Marine grade 316 stainless steel body and screws.
- GFR polymer recess housing.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module.
- Remote driver – constant voltage (available separately).
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.
- To avoid over-heating, this luminaire must be used under water only.



Sindhorn Village, Bangkok – THAILAND

ACQUA




ACQUA




Asymmetric



Asymmetric



OD-7416



OD-7417

ACQUA

Application Type : Underwater
Subgroup : Wall recessed/ Spotlight

ACQUA / 7416	
ACQUA / 7417	
Luminaire Performance	
760 – 1220 lm	
12 W	
63 – 101 lm/W	
Beam Options	
Narrow	Medium
Wide	Asymmetric
Elliptical H	
Color Temperature	
2700K/ 3000K/ 4000K	
Controller	
Remote	
Input Options	
24Vdc	

Accessories	
	Honey comb louver
	Softening filter
	CV Driver
	IP68 Connector

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller	Ordering Code
							REMOTE	
ACQUA	OD-7416							
		12 W	10°	2700 K	1140 lm	95 lm/W	•	7416-A-2-583-92
				3000 K	1140 lm	95 lm/W	•	7416-A-2-584-92
				4000 K	1220 lm	101 lm/W	•	7416-A-2-585-92
		12 W	29°	2700 K	920 lm	76 lm/W	•	7416-B-2-583-92
				3000 K	920 lm	76 lm/W	•	7416-B-2-584-92
				4000 K	990 lm	82 lm/W	•	7416-B-2-585-92
	Asymmetric	12 W	42°	2700 K	900 lm	75 lm/W	•	7416-C-2-583-92
				3000 K	900 lm	75 lm/W	•	7416-C-2-584-92
				4000 K	960 lm	80 lm/W	•	7416-C-2-585-92
	Asymmetric	12 W	Asymmetric	2700 K	760 lm	63 lm/W	•	7416-K-2-583-92
				3000 K	760 lm	63 lm/W	•	7416-K-2-584-92
				4000 K	810 lm	67 lm/W	•	7416-K-2-585-92
	Asymmetric	12 W	43°/24°	2700 K	850 lm	70 lm/W	•	7416-H-2-583-92
				3000 K	850 lm	70 lm/W	•	7416-H-2-584-92
				4000 K	910 lm	75 lm/W	•	7416-H-2-585-92
	OD-7417							
		12 W	10°	2700 K	1140 lm	95 lm/W	•	7417-A-2-583-92
				3000 K	1140 lm	95 lm/W	•	7417-A-2-584-92
				4000 K	1220 lm	101 lm/W	•	7417-A-2-585-92
		12 W	29°	2700 K	920 lm	76 lm/W	•	7417-B-2-583-92
				3000 K	920 lm	76 lm/W	•	7417-B-2-584-92
				4000 K	990 lm	82 lm/W	•	7417-B-2-585-92
	Asymmetric	12 W	42°	2700 K	900 lm	75 lm/W	•	7417-C-2-583-92
				3000 K	900 lm	75 lm/W	•	7417-C-2-584-92
				4000 K	960 lm	80 lm/W	•	7417-C-2-585-92
	Asymmetric	12 W	Asymmetric	2700 K	760 lm	63 lm/W	•	7417-K-2-583-92
				3000 K	760 lm	63 lm/W	•	7417-K-2-584-92
				4000 K	810 lm	67 lm/W	•	7417-K-2-585-92
	Asymmetric	12 W	43°/24°	2700 K	850 lm	70 lm/W	•	7417-H-2-583-92
				3000 K	850 lm	70 lm/W	•	7417-H-2-584-92
				4000 K	910 lm	75 lm/W	•	7417-H-2-585-92

*Please contact sales team for special request.



IDEO O2, Bangkok – THAILAND



VAREE A family of LED underwater luminaires that is suitable to be installed on the ground, recess in a concrete wall or surface mounted. Operating with high lumen output LED from 2700K, 3000K, 4000K and RGBW with high CRI in 3 steps SDCM. **VAREE** is designed to illuminate swimming pools, decorative pools, fountains and any submersible application. A wide range of beam angles including Narrow, Medium, Wide and Elliptical beams as well as Asymmetric floor washer. **VAREE** is pre-wired with underwater cable and internally potted to prevent humidity and condensation. To avoid over-heating, **VAREE** is equipped with a thermal cut-off device thus the luminaire has to be submerged at all time. The marine grade 316 stainless steel material and advance polymer guarantees corrosion free appearance through out the life time. We highly recommend that the luminaire lay out should be considered during specifying and planning processes. Installation work must be carried out under national safety regulations.



www.unilamp.co.th/en/p/varee

Specification


- Designed, manufactured and tested according to IEC 60598.
- Marine grade 316 stainless steel / GFR polymer body.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module.
- Precise beam control.
- Remote driver constant voltage [available separately].
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.
- To avoid over-heating, this luminaire must be used under water only.



VAREE



VAREE

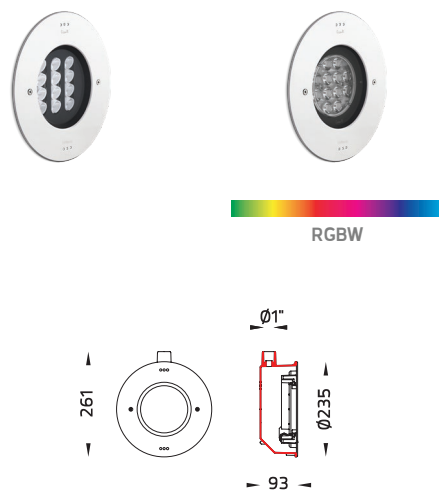


VAREE	
Application Type : Underwater	
Subgroup : Wall recessed	
VAREE / 7413	
Luminaire Performance	
1150 – 2040 lm	
18 – 25 W	
52 – 90 lm/W	
Beam Options	
Narrow	Medium
Wide	Asymmetric
Elliptical H	
Color Temperature	
3000K/ 4000K/ RGBW	
Controller	
Remote	
Input Voltage	
24Vdc	
700mA, 3.04Vdc, Uin max 50Vdc	

Accessories			
	Softening filter		Honey comb louver
	CV Driver		RGBW DALI Driver
	IP68 Connector		



VAREE



VAREE

Application Type : Underwater
Subgroup : Surface mount

VAREE / 7414	
Luminaire Performance	
1150 – 1780 lm	
18 – 25 W	
61 – 85 lm/W	
Beam Options	
Narrow	Medium
Wide	Asymmetric
Elliptical H	
Color Temperature	
3000K/ 4000K	
Controller	
Remote	
Input Voltage	
24Vdc	

Accessories

Softening filter



IP68
Connector

CV Driver

VAREE



VAREE

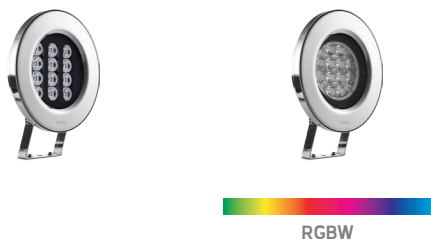


VAREE	
Application Type : Underwater	
Subgroup : Projector	
VAREE / 7415	
Luminaire Performance	
1150 – 2040 lm	
18 – 25 W	
52 – 81 lm/W	
Beam Options	
Narrow	Medium
Wide	Asymmetric
Elliptical H	
Color Temperature	
3000K/ 4000K/ RGBW	
Controller	
Remote	
Input Voltage	
24Vdc	
700mA, 4CHx5Vdc~6.5Vdc, Uin max 30Vdc	

Accessories	
Softening filter	Honey comb louver
CV Driver	RGBW DALI Driver
IP68 Connector	

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller	Ordering Code	
							REMOTE		
VAREE	OD-7413		18 W	12°	3000 K	1530 lm	85 lm/W	•	7413-5-2-867-92
	25°			3000 K	1260 lm	70 lm/W	•	7413-6-2-867-92	
	46°			3000 K	1150 lm	63 lm/W	•	7413-7-2-867-92	
	Asymmetric			3000 K	1250 lm	69 lm/W	•	7413-9-2-867-92	
	44°/10°			3000 K	1220 lm	67 lm/W	•	7413-3-2-867-92	
	 RGBW	18 W	12°	4000 K	1630 lm	90 lm/W	•	7413-5-2-868-92	
			25°	4000 K	1350 lm	75 lm/W	•	7413-6-2-868-92	
			46°	4000 K	1230 lm	68 lm/W	•	7413-7-2-868-92	
			Asymmetric	4000 K	1330 lm	73 lm/W	•	7413-9-2-868-92	
			44°/10°	4000 K	1300 lm	72 lm/W	•	7413-3-2-868-92	
		25 W	12°	3000 K	2040 lm	81 lm/W	•	7413-5-2-897-92	
			25°	3000 K	1690 lm	67 lm/W	•	7413-6-2-897-92	
			46°	3000 K	1540 lm	61 lm/W	•	7413-7-2-897-92	
			Asymmetric	3000 K	1660 lm	66 lm/W	•	7413-9-2-897-92	
			44°/10°	3000 K	1630 lm	65 lm/W	•	7413-3-2-897-92	
		25 W	25°	4000 K	1810 lm	72 lm/W	•	7413-6-2-898-92	
			46°	4000 K	1650 lm	66 lm/W	•	7413-7-2-898-92	
			Asymmetric	4000 K	1780 lm	71 lm/W	•	7413-9-2-898-92	
		24 W	25°	RGBW	1360 lm	56 lm/W	•	7413-B-2-686-92	
			46°	RGBW	1250 lm	52 lm/W	•	7413-C-2-686-92	
	44°/10°	RGBW	1330 lm	55 lm/W	•	7413-H-2-686-92			
	Asymmetric	RGBW	1560 lm	65 lm/W	•	7413-K-2-686-92			
	OD-7414		18 W	12°	3000 K	1530 lm	85 lm/W	•	7414-5-2-867-92
	25°			3000 K	1260 lm	70 lm/W	•	7414-6-2-867-92	
	46°			3000 K	1150 lm	63 lm/W	•	7414-7-2-867-92	
Asymmetric	3000 K			1250 lm	69 lm/W	•	7414-9-2-867-92		
44°/10°	3000 K			1220 lm	67 lm/W	•	7414-3-2-867-92		
	18 W	46°	4000 K	1230 lm	68 lm/W	•	7414-7-2-868-92		
		Asymmetric	4000 K	1330 lm	73 lm/W	•	7414-9-2-868-92		
	25 W	25°	3000 K	1690 lm	67 lm/W	•	7414-6-2-897-92		
		46°	3000 K	1540 lm	61 lm/W	•	7414-7-2-897-92		
		Asymmetric	3000 K	1660 lm	66 lm/W	•	7414-9-2-897-92		
		44°/10°	3000 K	1630 lm	65 lm/W	•	7414-3-2-897-92		
	25 W	46°	4000 K	1650 lm	66 lm/W	•	7414-7-2-898-92		
		Asymmetric	4000 K	1780 lm	71 lm/W	•	7414-9-2-898-92		
		44°/10°	4000 K	1740 lm	69 lm/W	•	7414-3-2-898-92		
OD-7415		18 W	25°	3000 K	1260 lm	70 lm/W	•	7415-B-2-867-92	
46°			3000 K	1150 lm	63 lm/W	•	7415-C-2-867-92		
44°/10°			3000 K	1220 lm	67 lm/W	•	7415-H-2-867-92		
46°			4000 K	1230 lm	68 lm/W	•	7415-C-2-868-92		
 RGBW	25 W	12°	3000 K	2040 lm	81 lm/W	•	7415-A-2-897-92		
		25°	3000 K	1690 lm	67 lm/W	•	7415-B-2-897-92		
	24 W	25°	RGBW	1360 lm	56 lm/W	•	7415-B-2-686-92		
		46°	RGBW	1250 lm	52 lm/W	•	7415-C-2-686-92		
		44°/10°	RGBW	1330 lm	55 lm/W	•	7415-H-2-686-92		

*Please contact sales team for special request.

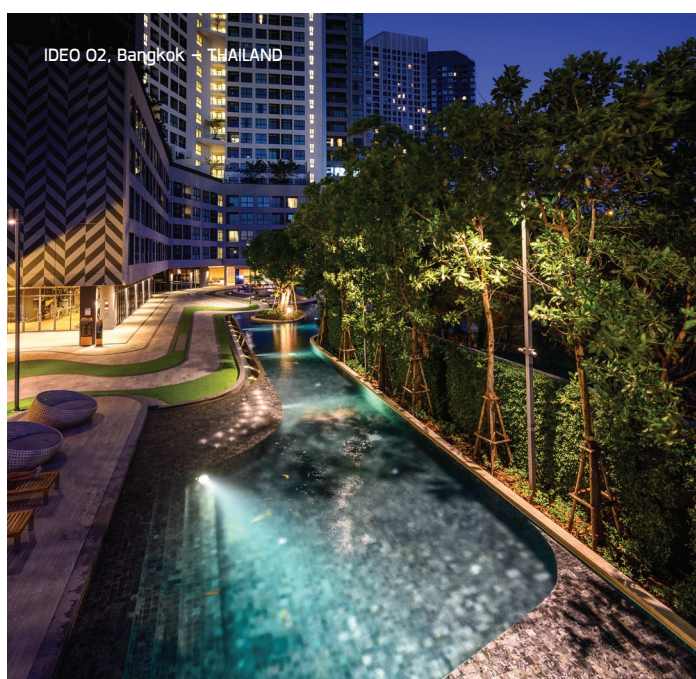

ARGOS

■ WALL SURFACE MOUNT



Robust and rectangular in appearance, **ARGOS** offers a wide variety of lighting effects. This is a wall light with simple geometric shape, which suitable for facade application. It can illuminate both upward and downward or in single direction depending on the desired lighting scheme. Through out state of art engineering and precise manufacturing processes offer reliable dust and water ingress protection of the luminaires. The quality LED modules deliver brilliant color rendering with high color consistency while maintaining a high-value luminaire efficiency.



PENTHOUSE, HYDERABAD - INDIA



www.unilamp.co.th/en/p/argos

Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminium housing.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- GFR PA6.6 terminal block.
- Weather proof TPE grommet.
- Installation must be carried out according to the enclosed product manual.

Available Color



****Custom colors are available on request.**



1. LED Module

High power LED in SMD/COB technology.
2700K, 3000K and 4000K.
CRI >80 / 3-Step MacAdam ellipse.

2. Safety Glass

Ultra white safety tempered glass cover.
Protect against mechanical impact.
Withstand the temperature up to 250°C

3. Control Gear

High quality constant current driver.
Conforms to safety and EMC regulation.

4. Body Housing

Enhanced LM6 die-cast aluminum body.
Low copper content [<0.1%]
Utilize 16 stages pre-treatment and coating process.

Gamla Gaddviksbron Lulea River, Norrbotten – SWEDEN



ARGOS



Mini ARGOS – Down



OD-5401



OD-5403

Mini ARGOS – Up / Down




OD-5405



OD-5407



OD-5409



Mini ARGOS

Application Type : Wall surface mount
Subgroup : Directed wall light/ Wall effect light

Mini ARGOS – Down / 5401	
Mini ARGOS – Down / 5402	
Mini ARGOS – Up / Down / 5405	
Mini ARGOS – Up / Down/ 5407	
Mini ARGOS – Up / Down / 5409	
Luminaire Performance	
160 – 1900 lm	
6.4 – 19 W	
17 – 100 lm/W	
Beam Options	
Bi-Symmetric	Asymmetric
	
BladeEffect	
	
Color Temperature	
3000K/ 4000K	
Controller	
On-Off/ DALI	
Input Options	
220-240Vac 50/60Hz	

Mini ARGOS – Down

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller		Ordering Code
								
OD-5401 	6.4 W	N/A	3000 K 4000 K	360 lm 270 lm	56 lm/W 42 lm/W	• •		5401-0-3-980-XX 5401-0-3-981-XX
	7.1 W	Asymmetric N/A	3000 K 4000 K	500 lm 490 lm	70 lm/W 69 lm/W	• •		5401-9-3-921-XX 5401-0-3-922-XX
	9 W	N/A	3000 K 4000 K	680 lm 670 lm	75 lm/W 74 lm/W	• •		5401-0-3-575-XX 5401-0-3-576-XX
	9 W	Asymmetric	3000 K 4000 K	680 lm 670 lm	75 lm/W 74 lm/W	• •		5401-9-3-575-XX 5401-9-3-576-XX
	14 W	N/A	3000 K 4000 K	1310 lm 1380 lm	93 lm/W 98 lm/W	• •		5401-0-3-666-XX 5401-0-3-667-XX
	14 W	Asymmetric	3000 K 4000 K	1150 lm 1210 lm	82 lm/W 86 lm/W	• •		5401-9-3-666-XX 5401-9-3-667-XX
	16 W	N/A Asymmetric	4000 K 4000 K	1150 lm 1010 lm	71 lm/W 63 lm/W	• •		5401-0-3-830-XX 5401-9-3-830-XX
	19 W	N/A	3000 K 4000 K	1800 lm 1900 lm	94 lm/W 100 lm/W	• •		5401-0-3-668-XX 5401-0-3-669-XX
	19 W	N/A	3000 K 4000 K	1800 lm 1900 lm	94 lm/W 100 lm/W	• •	•	5401-0-5-668-XX
	19 W	Asymmetric	3000 K 4000 K 3000 K	1580 lm 1670 lm 1580 lm	83 lm/W 87 lm/W 83 lm/W	• • •	•	5401-9-3-668-XX 5401-9-3-669-XX 5401-9-5-668-XX
OD-5403 	6.4 W	N/A	3000 K	160 lm	25 lm/W	•		5403-0-3-980-XX
OD-5405 	14 W	N/A	3000 K 4000 K	720 lm 740 lm	51 lm/W 52 lm/W	• •		5405-0-3-980-XX 5405-0-3-981-XX
	15 W	N/A	3000 K 4000 K	1000 lm 980 lm	66 lm/W 65 lm/W	• •		5405-0-3-921-XX 5405-0-3-922-XX
	15 W	Asymmetric	3000 K 4000 K	1000 lm 980 lm	66 lm/W 65 lm/W	• •		5405-9-3-921-XX 5405-9-3-922-XX
	18 W	N/A	3000 K 4000 K	1360 lm 1340 lm	75 lm/W 74 lm/W	• •		5405-0-3-575-XX 5405-0-3-576-XX
	18 W	Asymmetric	3000 K 4000 K	1360 lm 1340 lm	75 lm/W 74 lm/W	• •		5405-9-3-575-XX 5405-9-3-576-XX
	18 W	Asymmetric	3000 K 4000 K	1360 lm 1340 lm	75 lm/W 74 lm/W	• •		5405-9-3-575-XX 5405-9-3-576-XX
OD-5407 	14 W	N/A	3000 K 4000 K	520 lm 390 lm	37 lm/W 27 lm/W	• •		5407-0-3-980-XX 5407-0-3-981-XX
OD-5409 	14 W	N/A	3000 K 4000 K	320 lm 240 lm	22 lm/W 17 lm/W	• •		5409-0-3-980-XX 5409-0-3-981-XX


*Please contact sales team for special request.



■ WALL SURFACE MOUNT



DADOS a cube-shaped and cylindrical-shaped compact LED wall light suitable for both outdoor and indoor environments. Due to the sturdy LM6 aluminum construction and clear tempered glass cover, **DADOS** is protected from dust and water and possible harmful impact. It is operated with COB LED in 2700K, 3000K and 4000K color temperature.



A precise Photopia-designed reflector casts the light in sharp contrast to the surrounding with zero amount of glare. **DADOS** provides visual guidance in the architectural environment while being an unobtrusive object during the day. Double layer surface coating is applied thoroughly on the housing therefore it is highly corrosion resistant to any extreme condition.



www.unilamp.co.th/en/p/dados


Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Weather proof TPE grommet.
- Installation must be carried out according to the enclosed product manual.

Available Color



****Custom colors are available on request.**

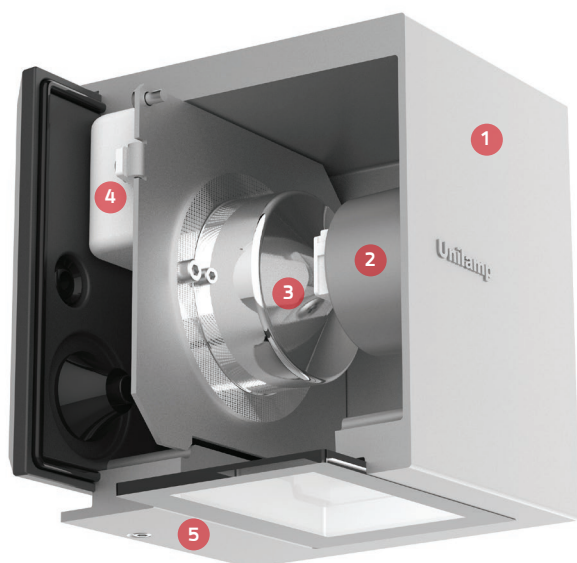

1. Body Housing

Housing made from enhanced LM6 die-cast aluminum with 16-step coating process including nano ceramic film. Low copper content <0.1%

2. LED Module

COB Led directly attached to the body for fastest heat transfer. 2700K, 3000K and 4000K CRI>80

3. Reflector


State of art high efficiency Computer-Aided design reflector.

4. Driver

High quality LED constant current driver. Conform to applicable safety standards and electromagnetic compatibility.

5. Easy to install


Just one screw to securely lock or unlock the luminaire. Thank to a hook-lock mechanism.

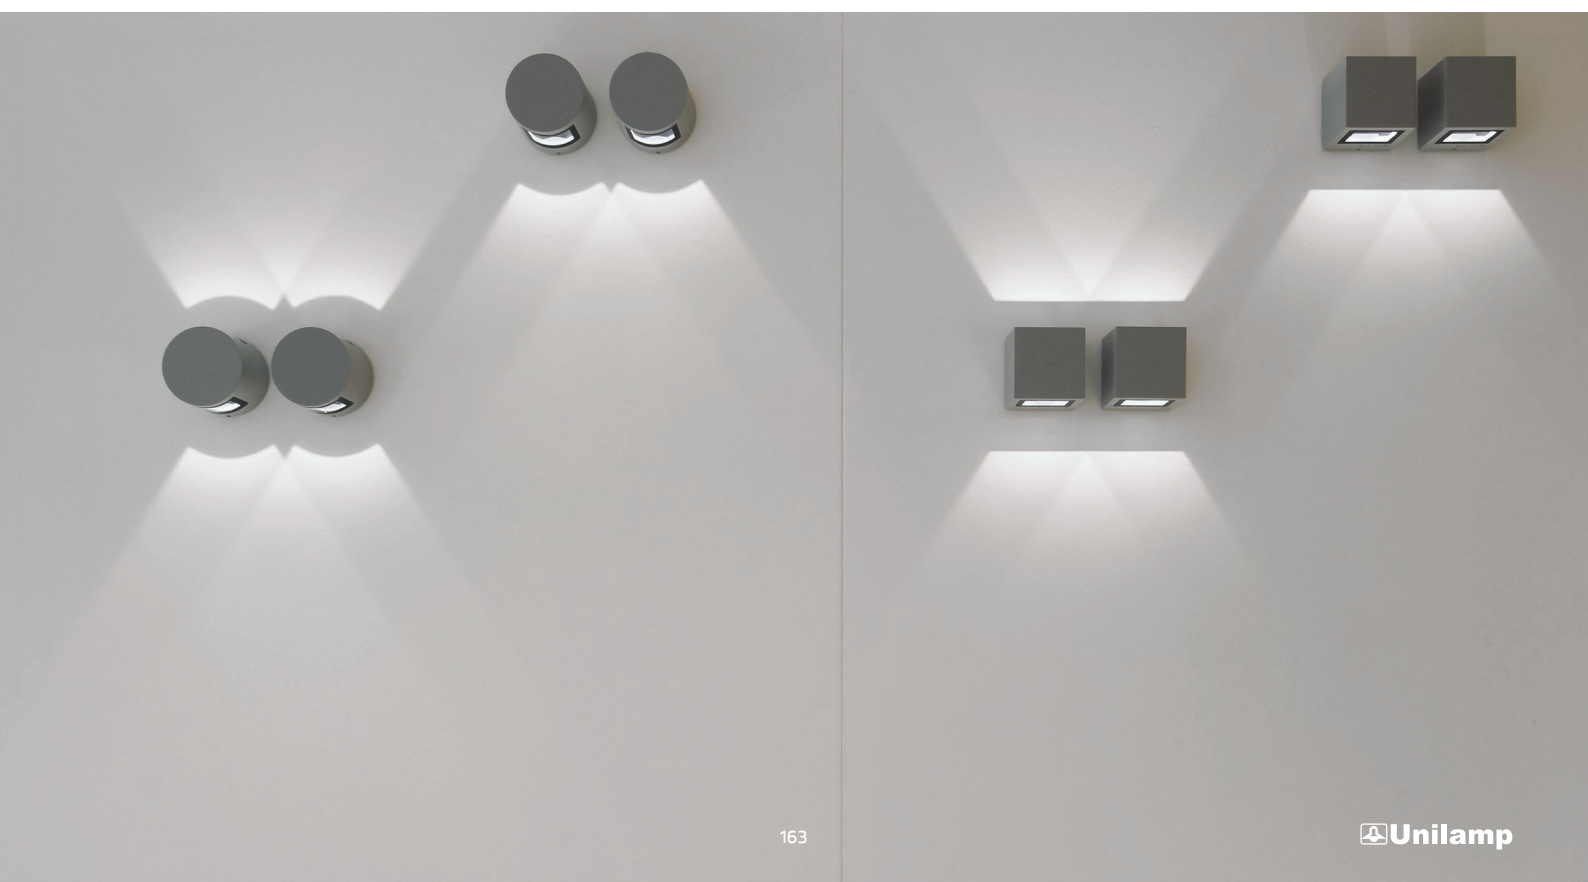

DADOS



Mini DADOS Round – UP DN/
Mini DADOS Round – DN Mini DADOS Square – UP DN/
Mini DADOS Square – DN

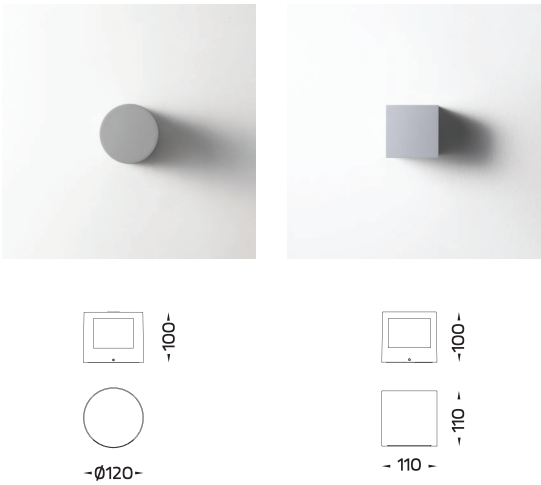

Al Siraj New Office – OMAN


Mini DADOS

Application Type : Wall surface mount
Subgroup : Wall effect light

Mini DADOS Round – DN / 5421	
Mini DADOS Round – UP DN / 5422	
Mini DADOS Square – DN / 5411	
Mini DADOS Square – UP DN / 5412	
Luminaire Performance	
60 – 160 lm	
6.4 W	
9 – 25 lm/W	
Beam Options	
Color Temperature	
2700K/ 3000K/ 4000K	
Controller	
On-Off	
Input Options	
220-240Vac 50/60Hz	

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller	Ordering Code
							⏻	
Mini DADOS Round	OD-5421	6.4 W	N/A	2700 K 3000 K 4000 K	100 lm 110 lm 80 lm	15 lm/W 17 lm/W 12 lm/W	• • •	5421-0-3-883-XX 5421-0-3-980-XX 5421-0-3-981-XX
								
Mini DADOS Round	OD-5422	6.4 W	N/A	2700 K 3000 K 4000 K	150 lm 160 lm 120 lm	23 lm/W 25 lm/W 18 lm/W	• • •	5422-0-3-883-XX 5422-0-3-980-XX 5422-0-3-981-XX
								
Mini DADOS Square	OD-5411	6.4 W	N/A	2700 K 3000 K 4000 K	80 lm 90 lm 60 lm	12 lm/W 14 lm/W 9 lm/W	• • •	5411-0-3-883-XX 5411-0-3-980-XX 5411-0-3-981-XX
								
Mini DADOS Square	OD-5412	6.4 W	N/A	2700 K 3000 K 4000 K	130 lm 130 lm 100 lm	20 lm/W 20 lm/W 15 lm/W	• • •	5412-0-3-883-XX 5412-0-3-980-XX 5412-0-3-981-XX
								

*Please contact sales team for special request.

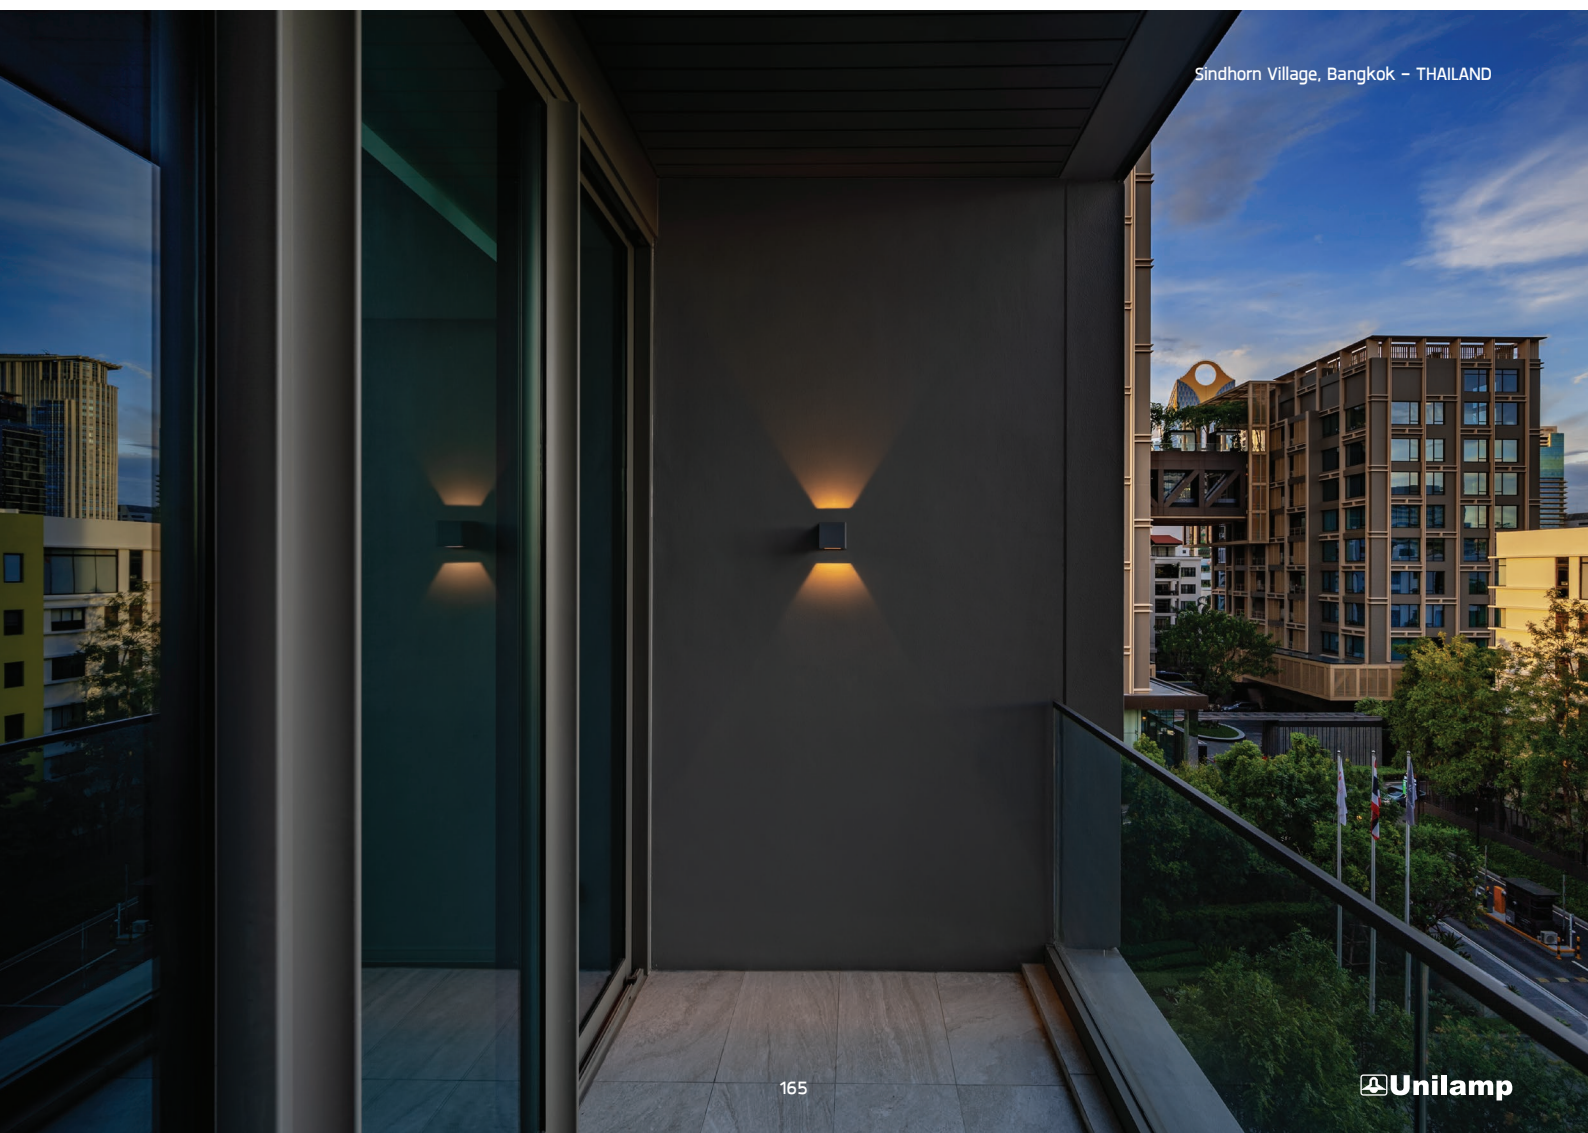


Sindhorn Village, Bangkok - THAILAND

SKUNA

- WALL SURFACE MOUNT
- BOLLARD



A new compact bollard and wall luminaire family featuring robust aluminum housing with various type of light distribution. **SKUNA** utilized LED modules from renowned manufacturer with high precision optical lenses offering narrow beam, medium beam, wide beam, forward throw and side throw light distribution. Featuring screw-less design housing made from copper free LM6 die-cast aluminum and S6063 extruded aluminum with Nano-Ceramic film protection. **SKUNA** is perfect for residential area as well as community-scale blocks.

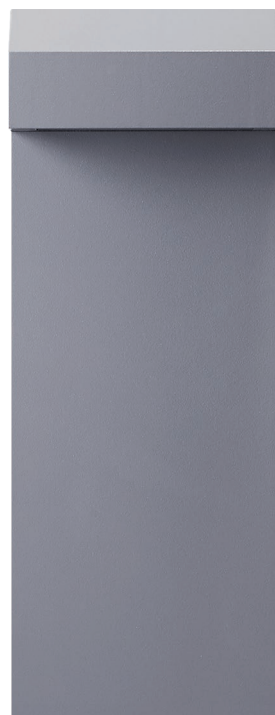

www.unilamp.co.th/en/p/skuna

Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum / extruded aluminum housing.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- GFR PA6.6 terminal block.
- Weather proof TPE grommet.
- Installation must be carried out according to the enclosed product manual.

Available Color





**Custom colors are available on request.



Mini SKUNA



Medium SKUNA



SKUNA

Application Type : Wall surface mount


Subgroup : Area wall light/ Directed wall light

Mini SKUNA / 5601
Mini SKUNA – CVDA/ 5601
Medium SKUNA / 5602

Luminaire Performance

400 – 3130 lm
8 – 29 W
50 – 111 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K


Controller

On-off/ On-off/DALI/ DIM 1-10V/ DALI

Input Voltage

24Vdc
220-240VAC 50/60HZ


Accessories




SKUNA




SKUNA
Bollard Wide Base




SKUNA
Short Bollard Wide Base
Short Bollard Wide Base CVDA



SKUNA
Bollard Slim Base
Bollard Slim Base CVDA



SKUNA
Short Bollard Slim Base
Short Bollard Slim Base CVDA



SKUNA

Application Type : Bollard

SKUNA – Bollard Wide Base/ 7148
SKUNA – Short Bollard Wide Base/ 7149
SKUNA – Short Bollard Wide Base – CVDA/ 7149
SKUNA – Bollard Slim Base/ 7848
SKUNA – Bollard Slim Base – CVDA/ 7848
SKUNA – Short Bollard Slim Base/ 7849
SKUNA – Short Bollard Slim Base – CVDA/ 7849

Luminaire Performance

360 – 830 lm
8 – 14 W
45 – 62 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

On-off/ On-off/DALI/ DALI

Input Voltage

24Vdc
220-240VAC 50/60HZ

Accessories



CV Driver



Anchor Bolt

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code	
								DALI				
Mini SKUNA	OD-5601 	8 W	16°	3000 K	660 lm	82 lm/W	•				5601-A-3-546-XX	
			30°	3000 K	640 lm	80 lm/W	•				5601-C-3-546-XX	
			60°	3000 K	590 lm	73 lm/W	•				5601-D-3-546-XX	
			95°	3000 K	520 lm	65 lm/W	•				5601-E-3-546-XX	
				4000 K	570 lm	71 lm/W	•				5601-E-3-547-XX	
			Asymmetric	3000 K	490 lm	61 lm/W	•				5601-K-3-546-XX	
				4000 K	540 lm	67 lm/W	•				5601-K-3-547-XX	
		8.4 W	88°/21°	3000 K	480 lm	60 lm/W	•				5601-H-3-546-XX	
			Road Optic	4000 K	400 lm	50 lm/W	•				5601-I-3-547-XX	
			60°	3000 K	810 lm	96 lm/W		•			5601-D-7-654-XX	
			95°	3000 K	720 lm	85 lm/W		•			5601-E-7-654-XX	
			Asymmetric	3000 K	680 lm	80 lm/W		•			5601-K-7-654-XX	
		10 W	16°	3000 K	890 lm	89 lm/W	•				5601-A-3-544-XX	
			30°	3000 K	880 lm	88 lm/W	•				5601-C-3-544-XX	
			60°	3000 K	810 lm	81 lm/W	•				5601-D-3-544-XX	
			95°	3000 K	720 lm	72 lm/W	•				5601-E-3-544-XX	
			Asymmetric	3000 K	680 lm	68 lm/W	•				5601-K-3-544-XX	
				4000 K	730 lm	73 lm/W	•				5601-K-3-545-XX	
			88°/21°	3000 K	720 lm	72 lm/W	•				5601-H-3-544-XX	
				4000 K	770 lm	77 lm/W	•				5601-H-3-545-XX	
			Road Optic	4000 K	550 lm	55 lm/W	•				5601-I-3-545-XX	
		11 W	97°	3000 K	830 lm	75 lm/W	•				5601-E-3-886-XX	
		14 W	97°	3000 K	1140 lm	81 lm/W				•	5601-E-5-901-XX	
Medium SKUNA	OD-5602 	20 W	60°	4000 K	2180 lm	109 lm/W	•				5602-D-3-547-XX	
			95°	4000 K	1980 lm	99 lm/W	•				5602-E-3-547-XX	
				4000 K	1980 lm	99 lm/W				•	5602-E-5-547-XX	
			Asymmetric	4000 K	1950 lm	97 lm/W	•				5602-K-3-547-XX	
			Road Optic	4000 K	1690 lm	84 lm/W	•				5602-I-3-547-XX	
		21 W	16°	3000 K	2200 lm	104 lm/W	•				5602-A-3-546-XX	
			60°	3000 K	2040 lm	97 lm/W	•				5602-D-3-546-XX	
			95°	3000 K	1860 lm	88 lm/W	•				5602-E-3-546-XX	
			Asymmetric	3000 K	1830 lm	87 lm/W	•				5602-K-3-546-XX	
				3000 K	1830 lm	87 lm/W				•	5602-K-5-546-XX	
			Road Optic	3000 K	1580 lm	75 lm/W	•				5602-I-3-546-XX	
				3000 K	1580 lm	75 lm/W				•	5602-I-5-546-XX	
		28 W	30°	4000 K	3130 lm	111 lm/W	•				5602-C-3-545-XX	
			60°	4000 K	2960 lm	105 lm/W	•				5602-D-3-545-XX	
			60°	4000 K	2960 lm	105 lm/W				•	5602-D-5-545-XX	
			95°	4000 K	2690 lm	96 lm/W	•				5602-E-3-545-XX	
			Asymmetric	4000 K	2660 lm	95 lm/W	•				5602-K-3-545-XX	
		29 W	Road Optic	4000 K	2300 lm	82 lm/W	•				5602-I-3-545-XX	
			60°	3000 K	2800 lm	96 lm/W				•	5602-D-5-544-XX	
			Asymmetric	3000 K	2510 lm	86 lm/W	•				5602-K-3-544-XX	
				3000 K	2510 lm	86 lm/W				•	5602-K-4-544-XX	
			Road Optic	3000 K	2170 lm	74 lm/W	•				5602-I-3-544-XX	
		SKUNA – Bollard	OD-7148 	8 W	Side throw	3000 K	380 lm	47 lm/W	•			
Forward throw	2700 K				480 lm	48 lm/W	•				7148-K-3-523-XX	
10 W	Side throw			2700 K	510 lm	51 lm/W	•				7148-I-3-523-XX	
	Forward throw			3000 K	510 lm	51 lm/W	•				7148-I-3-897-XX	
14 W	Forward throw			3000 K	720 lm	51 lm/W	•				7148-K-3-569-XX	
8 W	Forward throw			3000 K	360 lm	45 lm/W	•				7149-K-3-867-XX	
				3000 K	480 lm	48 lm/W	•				7149-K-3-897-XX	
	Forward throw			4000 K	510 lm	51 lm/W	•				7149-K-3-898-XX	
	Side throw			3000 K	510 lm	51 lm/W	•				7149-I-3-897-XX	
	Forward throw			3000 K	670 lm	51 lm/W		•			7149-K-7-578-XX	
13 W	Forward throw			3000 K	720 lm	51 lm/W	•				7149-K-3-569-XX	
	Forward throw			3000 K	720 lm	51 lm/W	•				7149-K-3-569-XX	
	Side throw			2700 K	830 lm	59 lm/W	•				7149-I-3-567-XX	
	3000 K			830 lm	59 lm/W	•				7149-I-3-569-XX		
8 W	Forward throw			2700 K	360 lm	45 lm/W	•				7848-K-3-524-XX	
				3000 K	360 lm	45 lm/W	•				7848-K-3-867-XX	
	Forward throw			2700 K	480 lm	59 lm/W		•			7848-K-7-580-XX	
				3000 K	480 lm	59 lm/W		•			7848-K-7-581-XX	
	Forward throw			3000 K	480 lm	48 lm/W	•				7848-K-3-897-XX	
10 W	Forward throw			2700 K	510 lm	51 lm/W	•				7848-I-3-523-XX	
	Forward throw			3000 K	670 lm	51 lm/W		•			7848-K-7-578-XX	
	Forward throw			3000 K	720 lm	51 lm/W	•				7848-K-3-569-XX	
14 W	Forward throw			3000 K	830 lm	59 lm/W	•				7848-I-3-569-XX	
	Side throw	3000 K	830 lm	59 lm/W				•	7848-I-5-569-XX			
OD-7849	OD-7849 	8 W	Side throw	2700 K	380 lm	47 lm/W	•				7849-I-3-524-XX	
				3000 K	380 lm	47 lm/W	•				7849-I-3-867-XX	
		8.1 W	Side throw	3000 K	510 lm	62 lm/W		•			7849-I-7-581-XX	
			Forward throw	3000 K	480 lm	48 lm/W	•				7849-K-3-897-XX	
		10 W	Side throw	2700 K	510 lm	51 lm/W	•				7849-I-3-523-XX	
				3000 K	510 lm	51 lm/W	•				7849-I-3-897-XX	
		14 W	Forward throw	3000 K	720 lm	51 lm/W	•				7849-K-3-569-XX	

*Please contact sales team for special request.

NEWLY Added BRONCO

- CEILING MOUNT
- WALL SURFACE MOUNT




Content
by Application



Content
by Family



Mega BRONCO

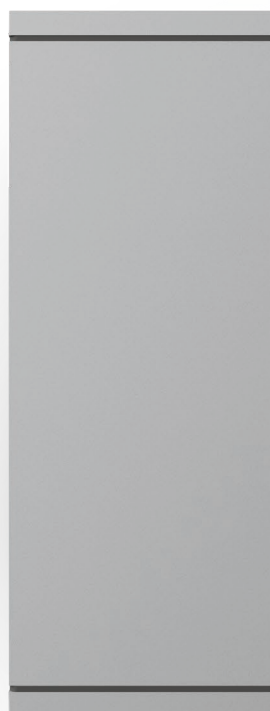

BRONCO is a contemporary slim luminaire family available as wall surface or ceiling mount configuration. The housing is made from extruded aluminum and enhanced LM6 die-cast aluminum which make it highly corrosion resistant to any extreme environment.

BRONCO is designed and tested under high ambient thermal condition. It is protected from the ingress of dust and water and can be used for both outdoor and indoor application. The luminaire is equipped with high-power LED and is available in 2700K, 3000K, 4000K and RGBW option.

Optics are utilized to direct the light in wide variety of light distributions. **BRONCO** is an excellent choice for a widespread range of lighting tasks in modern architectural settings such as highlighting of columns, building facades and high ceilings.



www.unilamp.co.th/en/p/bronco



Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum and extruded aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Weather proof TPE grommet.
- Installation must be carried out according to the enclosed product manual.

Available Color



****Custom colors are available on request.**

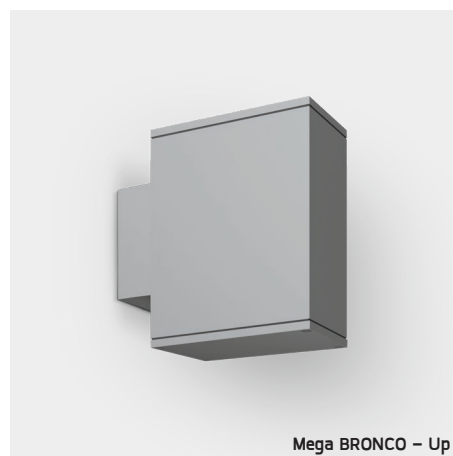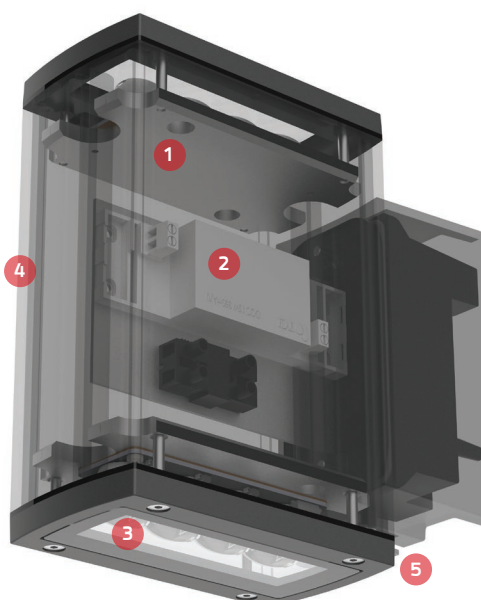


- 1. Heat Sink**
High purity aluminum heat sink attached to the body for fastest heat transfer.
- 2. Driver**
High quality LED constant current driver. Complied with safety and EMC regulations.
- 3. LED**
LED and optical lens from world renowned manufacturer. Available in narrow, wide, forward throw and sharp elliptical 2700K, 3000K and 4000K CRI>80 3-Step SDCM.
- 4. Body Housing**
Corrosion resistant extruded aluminum housing with nano ceramic protection film.
- 5. Connector**
Supplied with detachable connector for easy installation.

BRONCO



BRONCO
Up / Down

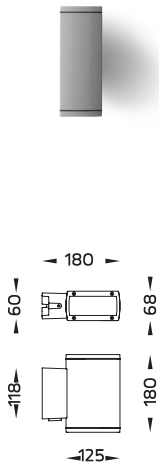


BRONCO

Application Type : Wall surface mount
Subgroup : Directed wall light

BRONCO – Up / Down / 5206	
BRONCO – Up / Down / 5207	
BRONCO – Up / Down / 5208	
BRONCO – Up / Down / 5209	
BRONCO – Up / Down / 5210	
BRONCO – Up / Down / 5211	
BRONCO – Up / Down / 5213	
BRONCO – Up / Down / 5214	
BRONCO – Up / Down / 5215	
Luminaire Performance	
380 – 1780 lm	
21 W	
18 – 84 lm/W	
Beam Options	
Color Temperature	
3000K/ 4000K	
Controller	
On-Off/ DALI	
Input Options	
220-240Vac 50/60Hz	

BRONCO
Down

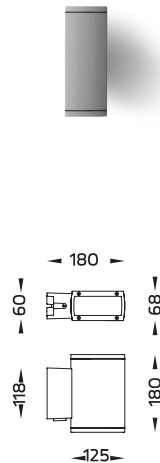

BRONCO

Application Type : Wall surface mount
Subgroup : Directed wall light

BRONCO – Down / 5203	
BRONCO – Down / 5204	
BRONCO – Down / 5205	
BRONCO – Down / 5212	
Luminaire Performance	
190 – 890 lm	
11 W	
17 – 80 lm/W	
Beam Options	
Color Temperature	
3000K/ 4000K	
Controller	
On-Off/ DALI	
Input Options	
220-240Vac 50/60Hz	



Mega BRONCO
Up / Down

NEW!

Mega BRONCO
Down

NEW!

Mega BRONCO
Up





NEW!

Mega BRONCO

NEW!



53



Mega BRONCO

Application Type : Wall surface mount / Ceiling mount
Subgroup : Directed wall light

Mega BRONCO – Up / Down / 5221

Mega BRONCO – Down / 5222

Mega BRONCO – Up / 5223

Mega BRONCO / 4222

Luminaire Performance

1120 – 5740 lm

19 – 55 W

50 – 111 lm/W

Beam Options



Color Temperature


2700/ 3000K/ 4000K/ RGBW

Controller

On-Off/ DALI/ DMX







Input Options

220–240Vac 50/60Hz

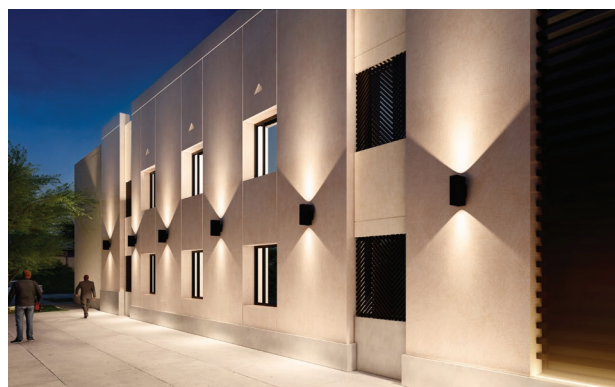

BRONCO

BRONCO
Up / Down

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller			Ordering Code
									
OD-5206 	21 W	10°/43°	3000 K 4000 K	1570 lm 1660 lm	74 lm/W 79 lm/W	• •			5206-0-3-897-XX 5206-0-3-898-XX
OD-5207 	21 W	43°/10°	3000 K 4000 K	1540 lm 1640 lm	73 lm/W 78 lm/W	• •			5207-0-3-897-XX 5207-0-3-898-XX
OD-5208 	21 W	Asymmetric	3000 K 4000 K 3000 K	1670 lm 1780 lm 1670 lm	79 lm/W 84 lm/W 79 lm/W	• •	•		5208-0-3-897-XX 5208-0-3-898-XX 5208-0-5-897-XX
OD-5209 	21 W	10°/43°, 43°/10°	3000 K 4000 K	1560 lm 1650 lm	74 lm/W 78 lm/W	• •			5209-0-3-897-XX 5209-0-3-898-XX
OD-5210 	21 W	10°/43°, Asymmetric	3000 K 4000 K	1620 lm 1720 lm	77 lm/W 81 lm/W	• •			5210-0-3-897-XX 5210-0-3-898-XX
OD-5211 	21 W	43°/10°, Asymmetric	3000 K 4000 K 3000 K	1610 lm 1710 lm 1610 lm	76 lm/W 81 lm/W 76 lm/W	• •	•		5211-0-3-897-XX 5211-0-3-898-XX 5211-0-5-897-XX
OD-5213 	21 W	Sharp Elliptical V	3000 K 4000 K 3000 K 4000 K	380 lm 400 lm 380 lm 400 lm	18 lm/W 19 lm/W 18 lm/W 19 lm/W	• •	• •		5213-0-3-897-XX 5213-0-3-898-XX 5213-0-5-897-XX 5213-0-5-898-XX
OD-5214 	21 W	Sharp Elliptical V, 43°/10°	3000 K	1020 lm	48 lm/W	•			5214-0-3-897-XX
OD-5215 	21 W	Sharp Elliptical V, Asymmetric	3000 K	1080 lm	51 lm/W	•			5215-0-3-897-XX
OD-5203 	11 W	10°/43°	3000 K 4000 K 3000 K	780 lm 830 lm 780 lm	70 lm/W 75 lm/W 70 lm/W	• •	•		5203-0-3-897-XX 5203-0-3-898-XX 5203-0-5-897-XX
OD-5204 	11 W	43°/10°	3000 K 4000 K 4000 K	770 lm 820 lm 820 lm	70 lm/W 74 lm/W 74 lm/W	• •	•		5204-0-3-897-XX 5204-0-3-898-XX 5204-0-5-898-XX
OD-5205 	11 W	Asymmetric	3000 K 4000 K 3000 K	830 lm 890 lm 830 lm	75 lm/W 80 lm/W 75 lm/W	• •	•		5205-0-3-897-XX 5205-0-3-898-XX 5205-0-5-897-XX
OD-5212 	11 W	Sharp Elliptical V	3000 K 4000 K 3000 K 4000 K	190 lm 200 lm 190 lm 200 lm	17 lm/W 18 lm/W 17 lm/W 18 lm/W	• •	• •		5212-0-3-897-XX 5212-0-3-898-XX 5212-0-5-897-XX 5212-0-5-898-XX

*Please contact sales team for special request.

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller			Ordering Code
									
OD-5221 	36 W	10°	2700 K	3760 lm	104 lm/W	•			5221-A-3-393-XX
			3000 K	3760 lm	104 lm/W	•			5221-A-3-394-XX
			4000 K	4010 lm	111 lm/W	•			5221-A-3-395-XX
	36 W	16°/44°	2700 K	3760 lm	104 lm/W		•		5221-A-5-393-XX
			3000 K	3760 lm	104 lm/W		•		5221-A-5-394-XX
			4000 K	4010 lm	111 lm/W		•		5221-A-5-395-XX
	36 W	16°/44°	2700 K	3160 lm	87 lm/W	•			5221-N-3-393-XX
			3000 K	3160 lm	87 lm/W	•			5221-N-3-394-XX
			4000 K	3370 lm	93 lm/W	•			5221-N-3-395-XX
	36 W	16°/44°	2700 K	3160 lm	87 lm/W		•		5221-N-5-393-XX
			3000 K	3160 lm	87 lm/W		•		5221-N-5-394-XX
			4000 K	3370 lm	93 lm/W		•		5221-N-5-395-XX
	36 W	27°	2700 K	3340 lm	92 lm/W	•			5221-B-3-393-XX
			3000 K	3340 lm	92 lm/W	•			5221-B-3-394-XX
			4000 K	3560 lm	98 lm/W	•			5221-B-3-395-XX
	36 W	27°	2700 K	3340 lm	92 lm/W		•		5221-B-5-393-XX
			3000 K	3340 lm	92 lm/W		•		5221-B-5-394-XX
			4000 K	3560 lm	98 lm/W		•		5221-B-5-395-XX
	36 W	40°	2700 K	3340 lm	92 lm/W	•			5221-C-3-393-XX
			3000 K	3340 lm	92 lm/W	•			5221-C-3-394-XX
			4000 K	3560 lm	98 lm/W	•			5221-C-3-395-XX
	36 W	40°	2700 K	3340 lm	92 lm/W		•		5221-C-5-393-XX
			3000 K	3340 lm	92 lm/W		•		5221-C-5-394-XX
			4000 K	3560 lm	98 lm/W		•		5221-C-5-395-XX
	36 W	44°/16°	2700 K	3160 lm	87 lm/W	•			5221-H-3-393-XX
			3000 K	3160 lm	87 lm/W	•			5221-H-3-394-XX
			4000 K	3370 lm	93 lm/W	•			5221-H-3-395-XX
	36 W	44°/16°	2700 K	3160 lm	87 lm/W		•		5221-H-5-393-XX
			3000 K	3160 lm	87 lm/W		•		5221-H-5-394-XX
			4000 K	3370 lm	93 lm/W		•		5221-H-5-395-XX
	36 W	Asymmetric	2700 K	2240 lm	62 lm/W	•			5221-U-3-393-XX
			3000 K	2240 lm	62 lm/W	•			5221-U-3-394-XX
			4000 K	2390 lm	66 lm/W	•			5221-U-3-395-XX
	36 W	Asymmetric	2700 K	2240 lm	62 lm/W		•		5221-U-5-393-XX
			3000 K	2240 lm	62 lm/W		•		5221-U-5-394-XX
			4000 K	2390 lm	66 lm/W		•		5221-U-5-395-XX
	38 W	8°	3000 K	3280 lm	86 lm/W	•			5221-4-3-397-XX
			3000 K	3280 lm	86 lm/W		•		5221-4-5-397-XX
	46 W	13°	RGBW	3460 lm	75 lm/W			•	5221-A-6-440-XX
		13°/41°	RGBW	3120 lm	67 lm/W			•	5221-N-6-440-XX
		26°	RGBW	3060 lm	66 lm/W			•	5221-B-6-440-XX
		36°	RGBW	2920 lm	63 lm/W			•	5221-C-6-440-XX
		41°/13°	RGBW	3120 lm	67 lm/W			•	5221-H-6-440-XX
	50 W	13°	RGBW	3460 lm	69 lm/W		•		5221-A-5-440-XX
		13°/41°	RGBW	3120 lm	62 lm/W		•		5221-N-5-440-XX
		26°	RGBW	3060 lm	61 lm/W		•		5221-B-5-440-XX
		36°	RGBW	2920 lm	58 lm/W		•		5221-C-5-440-XX
		41°/13°	RGBW	3120 lm	62 lm/W		•		5221-H-5-440-XX
	55 W	10°	2700 K	5380 lm	97 lm/W	•			5221-A-3-387-XX
			3000 K	5380 lm	97 lm/W	•			5221-A-3-388-XX
			4000 K	5740 lm	104 lm/W	•			5221-A-3-389-XX
			2700 K	5380 lm	97 lm/W		•		5221-A-5-387-XX
			3000 K	5380 lm	97 lm/W		•		5221-A-5-388-XX
	55 W	16°/44°	4000 K	5740 lm	104 lm/W		•		5221-A-5-389-XX
			2700 K	4520 lm	82 lm/W	•			5221-N-3-387-XX
			3000 K	4520 lm	82 lm/W	•			5221-N-3-388-XX
			4000 K	4830 lm	87 lm/W	•			5221-N-3-389-XX
			2700 K	4520 lm	82 lm/W		•		5221-N-5-387-XX
	55 W	27°	3000 K	4520 lm	82 lm/W		•		5221-N-5-388-XX
			4000 K	4830 lm	87 lm/W		•		5221-N-5-389-XX
			2700 K	4780 lm	86 lm/W	•			5221-B-3-387-XX
			3000 K	4780 lm	86 lm/W	•			5221-B-3-388-XX
			4000 K	5100 lm	92 lm/W	•			5221-B-3-389-XX
	55 W	40°	2700 K	4780 lm	86 lm/W		•		5221-B-5-387-XX
			3000 K	4780 lm	86 lm/W		•		5221-B-5-388-XX
			4000 K	5100 lm	92 lm/W		•		5221-B-5-389-XX
			2700 K	4780 lm	86 lm/W	•			5221-C-3-387-XX
			3000 K	4780 lm	86 lm/W	•			5221-C-3-388-XX
	55 W	44°/16°	4000 K	5100 lm	92 lm/W	•			5221-C-3-389-XX
			2700 K	4780 lm	86 lm/W		•		5221-C-5-387-XX
			3000 K	4780 lm	86 lm/W		•		5221-C-5-388-XX
			4000 K	5100 lm	92 lm/W		•		5221-C-5-389-XX
			2700 K	4520 lm	82 lm/W	•			5221-H-3-387-XX
	55 W	Asymmetric	3000 K	4520 lm	82 lm/W	•			5221-H-3-388-XX
			4000 K	4830 lm	87 lm/W	•			5221-H-3-389-XX
			2700 K	4520 lm	82 lm/W		•		5221-H-5-387-XX
			3000 K	4520 lm	82 lm/W		•		5221-H-5-388-XX
			4000 K	4830 lm	87 lm/W		•		5221-H-5-389-XX
	55 W	Asymmetric	2700 K	3200 lm	58 lm/W	•			5221-U-3-387-XX
			3000 K	3200 lm	58 lm/W	•			5221-U-3-388-XX
			4000 K	3420 lm	62 lm/W	•			5221-U-3-389-XX
			2700 K	3200 lm	58 lm/W		•		5221-U-5-387-XX
			3000 K	3200 lm	58 lm/W		•		5221-U-5-388-XX
			4000 K	3420 lm	62 lm/W		•		5221-U-5-389-XX

Mega BRONCO
Down

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller			Ordering Code
<div>OD-5222</div> 	19 W	8°	3000 K	1640 lm	86 lm/W	•	•		5222-4-3-397-XX
			3000 K	1640 lm	86 lm/W				5222-4-5-397-XX
	20 W	10°	2700 K	1880 lm	94 lm/W	•			5222-A-3-393-XX
			3000 K	1880 lm	94 lm/W	•			5222-A-3-394-XX
			4000 K	2000 lm	100 lm/W	•			5222-A-3-395-XX
			2700 K	1880 lm	94 lm/W		•		5222-A-5-393-XX
			3000 K	1880 lm	94 lm/W		•		5222-A-5-394-XX
			4000 K	2000 lm	100 lm/W		•		5222-A-5-395-XX
	20 W	16°/44°	2700 K	1580 lm	79 lm/W	•			5222-N-3-393-XX
			3000 K	1580 lm	79 lm/W	•			5222-N-3-394-XX
			4000 K	1680 lm	84 lm/W	•			5222-N-3-395-XX
			2700 K	1580 lm	79 lm/W		•		5222-N-5-393-XX
			3000 K	1580 lm	79 lm/W		•		5222-N-5-394-XX
			4000 K	1680 lm	84 lm/W		•		5222-N-5-395-XX
	20 W	27°	2700 K	1670 lm	83 lm/W	•			5222-B-3-393-XX
			3000 K	1670 lm	83 lm/W	•			5222-B-3-394-XX
			4000 K	1780 lm	89 lm/W	•			5222-B-3-395-XX
			2700 K	1670 lm	83 lm/W		•		5222-B-5-393-XX
			3000 K	1670 lm	83 lm/W		•		5222-B-5-394-XX
			4000 K	1780 lm	89 lm/W		•		5222-B-5-395-XX
			2700 K	1670 lm	83 lm/W	•			5222-C-3-393-XX
			3000 K	1670 lm	83 lm/W	•			5222-C-3-394-XX
	20 W	40°	4000 K	1780 lm	89 lm/W	•			5222-C-3-395-XX
			2700 K	1670 lm	83 lm/W		•		5222-C-5-393-XX
			3000 K	1670 lm	83 lm/W		•		5222-C-5-394-XX
			4000 K	1780 lm	89 lm/W		•		5222-C-5-395-XX
	20 W	44°/16°	2700 K	1580 lm	79 lm/W	•			5222-H-3-393-XX
			3000 K	1580 lm	79 lm/W	•			5222-H-3-394-XX
			4000 K	1680 lm	84 lm/W	•			5222-H-3-395-XX
			2700 K	1580 lm	79 lm/W		•		5222-H-5-393-XX
			3000 K	1580 lm	79 lm/W		•		5222-H-5-394-XX
			4000 K	1680 lm	84 lm/W		•		5222-H-5-395-XX
			2700 K	1120 lm	56 lm/W	•			5222-U-3-393-XX
			3000 K	1120 lm	56 lm/W	•			5222-U-3-394-XX
	20 W	Asymmetric	4000 K	1190 lm	59 lm/W	•			5222-U-3-395-XX
			2700 K	1120 lm	56 lm/W		•		5222-U-5-393-XX
			3000 K	1120 lm	56 lm/W		•		5222-U-5-394-XX
			4000 K	1190 lm	59 lm/W		•		5222-U-5-395-XX
	28 W	13° 13°/41° 26° 36° 41°/13°	RGBW	1730 lm	61 lm/W		•		5222-A-5-440-XX
			RGBW	1560 lm	55 lm/W		•		5222-N-5-440-XX
			RGBW	1530 lm	54 lm/W		•		5222-B-5-440-XX
			RGBW	1460 lm	52 lm/W		•		5222-C-5-440-XX
			RGBW	1560 lm	55 lm/W		•		5222-H-5-440-XX
	29 W	13° 13°/41° 26° 36° 41°/13°	RGBW	1730 lm	59 lm/W			•	5222-A-6-440-XX
			RGBW	1560 lm	53 lm/W			•	5222-N-6-440-XX
			RGBW	1530 lm	52 lm/W			•	5222-B-6-440-XX
			RGBW	1460 lm	50 lm/W			•	5222-C-6-440-XX
			RGBW	1560 lm	53 lm/W			•	5222-H-6-440-XX
	30 W	10°	2700 K	2690 lm	89 lm/W	•			5222-A-3-387-XX
			3000 K	2690 lm	89 lm/W	•			5222-A-3-388-XX
			4000 K	2870 lm	95 lm/W	•			5222-A-3-389-XX
			2700 K	2690 lm	89 lm/W		•		5222-A-5-387-XX
			3000 K	2690 lm	89 lm/W		•		5222-A-5-388-XX
			4000 K	2870 lm	95 lm/W		•		5222-A-5-389-XX
	30 W	16°/44°	2700 K	2260 lm	75 lm/W	•			5222-N-3-387-XX
			3000 K	2260 lm	75 lm/W	•			5222-N-3-388-XX
			4000 K	2410 lm	80 lm/W	•			5222-N-3-389-XX
			2700 K	2260 lm	75 lm/W		•		5222-N-5-387-XX
	30 W	27°	3000 K	2260 lm	75 lm/W		•		5222-N-5-388-XX
			4000 K	2410 lm	80 lm/W		•		5222-N-5-389-XX
	30 W	40°	2700 K	2390 lm	79 lm/W	•			5222-B-3-387-XX
			3000 K	2390 lm	79 lm/W	•			5222-B-3-388-XX
			4000 K	2550 lm	85 lm/W	•			5222-B-3-389-XX
			2700 K	2390 lm	79 lm/W		•		5222-B-5-387-XX
	30 W	44°/16°	3000 K	2390 lm	79 lm/W		•		5222-B-5-388-XX
			4000 K	2550 lm	85 lm/W		•		5222-B-5-389-XX
	30 W	Asymmetric	2700 K	2390 lm	79 lm/W	•			5222-C-3-387-XX
			3000 K	2390 lm	79 lm/W	•			5222-C-3-388-XX
			4000 K	2550 lm	85 lm/W	•			5222-C-3-389-XX
			2700 K	2390 lm	79 lm/W		•		5222-C-5-387-XX
	30 W	Asymmetric	3000 K	2390 lm	79 lm/W		•		5222-C-5-388-XX
			4000 K	2550 lm	85 lm/W		•		5222-C-5-389-XX
	30 W	Asymmetric	2700 K	2260 lm	75 lm/W	•			5222-H-3-387-XX
			3000 K	2260 lm	75 lm/W	•			5222-H-3-388-XX
			4000 K	2410 lm	80 lm/W	•			5222-H-3-389-XX
			2700 K	2260 lm	75 lm/W		•		5222-H-5-387-XX
	30 W	Asymmetric	3000 K	2260 lm	75 lm/W		•		5222-H-5-388-XX
			4000 K	2410 lm	80 lm/W		•		5222-H-5-389-XX
	30 W	Asymmetric	2700 K	1600 lm	53 lm/W	•			5222-U-3-387-XX
			3000 K	1600 lm	53 lm/W	•			5222-U-3-388-XX
			4000 K	1710 lm	57 lm/W	•			5222-U-3-389-XX
			2700 K	1600 lm	53 lm/W		•		5222-U-5-387-XX
	30 W	Asymmetric	3000 K	1600 lm	53 lm/W		•		5222-U-5-388-XX
			4000 K	1710 lm	57 lm/W		•		5222-U-5-389-XX

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller			Ordering Code
									
OD-5223 	19 W	8°	3000 K 3000 K	1640 lm 1640 lm	86 lm/W 86 lm/W	•	•		5223-4-3-397-XX 5223-4-5-397-XX
	20 W	10°	2700 K 3000 K 4000 K	1880 lm 1880 lm 2000 lm	94 lm/W 94 lm/W 100 lm/W	• • •			5223-A-3-393-XX 5223-A-3-394-XX 5223-A-3-395-XX
			2700 K 3000 K 4000 K	1880 lm 1880 lm 2000 lm	94 lm/W 94 lm/W 100 lm/W		• • •		5223-A-5-393-XX 5223-A-5-394-XX 5223-A-5-395-XX
			2700 K 3000 K 4000 K	1580 lm 1580 lm 1680 lm	79 lm/W 79 lm/W 84 lm/W	• • •			5223-N-3-393-XX 5223-N-3-394-XX 5223-N-3-395-XX
	20 W	16°/44°	2700 K 3000 K 4000 K	1580 lm 1580 lm 1680 lm	79 lm/W 79 lm/W 84 lm/W		• • •		5223-N-5-393-XX 5223-N-5-394-XX 5223-N-5-395-XX
			2700 K 3000 K 4000 K	1670 lm 1670 lm 1780 lm	83 lm/W 83 lm/W 89 lm/W	• • •			5223-B-3-393-XX 5223-B-3-394-XX 5223-B-3-395-XX
			2700 K 3000 K 4000 K	1670 lm 1670 lm 1780 lm	83 lm/W 83 lm/W 89 lm/W		• • •		5223-B-5-393-XX 5223-B-5-394-XX 5223-B-5-395-XX
	20 W	40°	2700 K 3000 K 4000 K	1670 lm 1670 lm 1780 lm	83 lm/W 83 lm/W 89 lm/W	• • •			5223-C-3-393-XX 5223-C-3-394-XX 5223-C-3-395-XX
			2700 K 3000 K 4000 K	1670 lm 1670 lm 1780 lm	83 lm/W 83 lm/W 89 lm/W		• • •		5223-C-5-393-XX 5223-C-5-394-XX 5223-C-5-395-XX
			2700 K 3000 K 4000 K	1580 lm 1580 lm 1680 lm	79 lm/W 79 lm/W 84 lm/W	• • •			5223-H-3-393-XX 5223-H-3-394-XX 5223-H-3-395-XX
	20 W	44°/16°	2700 K 3000 K 4000 K	1580 lm 1580 lm 1680 lm	79 lm/W 79 lm/W 84 lm/W		• • •		5223-H-5-393-XX 5223-H-5-394-XX 5223-H-5-395-XX
			2700 K 3000 K 4000 K	1120 lm 1120 lm 1190 lm	56 lm/W 56 lm/W 59 lm/W	• • •			5223-U-3-393-XX 5223-U-3-394-XX 5223-U-3-395-XX
			2700 K 3000 K 4000 K	1120 lm 1120 lm 1190 lm	56 lm/W 56 lm/W 59 lm/W		• • •		5223-U-5-393-XX 5223-U-5-394-XX 5223-U-5-395-XX
	20 W	Asymmetric	2700 K 3000 K 4000 K	1120 lm 1120 lm 1190 lm	56 lm/W 56 lm/W 59 lm/W	• • •			5223-A-5-440-XX 5223-N-5-440-XX 5223-B-5-440-XX
			2700 K 3000 K 4000 K	1560 lm 1560 lm 1530 lm	55 lm/W 55 lm/W 54 lm/W		• • •		5223-C-5-440-XX 5223-H-5-440-XX
			2700 K 3000 K 4000 K	1460 lm 1560 lm	52 lm/W 55 lm/W		• •		5223-A-6-440-XX 5223-N-6-440-XX
	28 W	13° 13°/41° 26° 36° 41°/13°	RGBW RGBW RGBW RGBW RGBW	1730 lm 1560 lm 1530 lm 1460 lm 1560 lm	61 lm/W 55 lm/W 54 lm/W 52 lm/W 55 lm/W			• • • • •	5223-B-6-440-XX 5223-C-6-440-XX 5223-H-6-440-XX
			RGBW RGBW RGBW RGBW RGBW	1730 lm 1560 lm 1530 lm 1460 lm 1560 lm	59 lm/W 53 lm/W 52 lm/W 50 lm/W 53 lm/W			• • • • •	5223-A-3-387-XX 5223-A-3-388-XX 5223-A-3-389-XX
			2700 K 3000 K 4000 K	2690 lm 2690 lm 2870 lm	89 lm/W 89 lm/W 95 lm/W	• • •			5223-A-5-387-XX 5223-A-5-388-XX 5223-A-5-389-XX
	30 W	10°	2700 K 3000 K 4000 K	2690 lm 2690 lm 2870 lm	89 lm/W 89 lm/W 95 lm/W		• • •		5223-N-3-387-XX 5223-N-3-388-XX 5223-N-3-389-XX
			2700 K 3000 K 4000 K	2260 lm 2260 lm 2410 lm	75 lm/W 75 lm/W 80 lm/W	• • •			5223-N-5-387-XX 5223-N-5-388-XX 5223-N-5-389-XX
			2700 K 3000 K 4000 K	2260 lm 2260 lm 2410 lm	75 lm/W 75 lm/W 80 lm/W		• • •		5223-B-3-387-XX 5223-B-3-388-XX 5223-B-3-389-XX
	30 W	16°/44°	2700 K 3000 K 4000 K	2390 lm 2390 lm 2550 lm	79 lm/W 79 lm/W 85 lm/W	• • •			5223-B-5-387-XX 5223-B-5-388-XX 5223-B-5-389-XX
			2700 K 3000 K 4000 K	2390 lm 2390 lm 2550 lm	79 lm/W 79 lm/W 85 lm/W		• • •		5223-C-3-387-XX 5223-C-3-388-XX 5223-C-3-389-XX
			2700 K 3000 K 4000 K	2390 lm 2390 lm 2550 lm	79 lm/W 79 lm/W 85 lm/W		• • •		5223-C-5-387-XX 5223-C-5-388-XX 5223-C-5-389-XX
	30 W	27°	2700 K 3000 K 4000 K	2260 lm 2260 lm 2410 lm	75 lm/W 75 lm/W 80 lm/W	• • •			5223-H-3-387-XX 5223-H-3-388-XX 5223-H-3-389-XX
			2700 K 3000 K 4000 K	2260 lm 2260 lm 2410 lm	75 lm/W 75 lm/W 80 lm/W		• • •		5223-H-5-387-XX 5223-H-5-388-XX 5223-H-5-389-XX
			2700 K 3000 K 4000 K	2260 lm 2260 lm 2410 lm	75 lm/W 75 lm/W 80 lm/W		• • •		5223-U-3-387-XX 5223-U-3-388-XX 5223-U-3-389-XX
	30 W	40°	2700 K 3000 K 4000 K	1600 lm 1600 lm 1710 lm	53 lm/W 53 lm/W 57 lm/W	• • •			5223-U-5-387-XX 5223-U-5-388-XX 5223-U-5-389-XX
			2700 K 3000 K 4000 K	1600 lm 1600 lm 1710 lm	53 lm/W 53 lm/W 57 lm/W		• • •		5223-U-5-388-XX 5223-U-5-389-XX

Mega BRONCO

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller			Ordering Code
<div>OD-4222</div> 	19 W	8°	3000 K 3000 K	1640 lm 1640 lm	86 lm/W 86 lm/W	•	•		4222-4-3-397-XX 4222-4-5-397-XX
	20 W	10°	2700 K 3000 K 4000 K	1880 lm 1880 lm 2000 lm	94 lm/W 94 lm/W 100 lm/W	• • •			4222-A-3-393-XX 4222-A-3-394-XX 4222-A-3-395-XX
			2700 K 3000 K 4000 K	1880 lm 1880 lm 2000 lm	94 lm/W 94 lm/W 100 lm/W		• • •		4222-A-5-393-XX 4222-A-5-394-XX 4222-A-5-395-XX
			2700 K 3000 K 4000 K	1580 lm 1580 lm 1680 lm	79 lm/W 79 lm/W 84 lm/W	• • •			4222-N-3-393-XX 4222-N-3-394-XX 4222-N-3-395-XX
			2700 K 3000 K 4000 K	1580 lm 1580 lm 1680 lm	79 lm/W 79 lm/W 84 lm/W		• • •		4222-N-5-393-XX 4222-N-5-394-XX 4222-N-5-395-XX
	20 W	16°/44°	2700 K 3000 K 4000 K	1670 lm 1670 lm 1780 lm	83 lm/W 83 lm/W 89 lm/W	• • •			4222-B-3-393-XX 4222-B-3-394-XX 4222-B-3-395-XX
			2700 K 3000 K 4000 K	1670 lm 1670 lm 1780 lm	83 lm/W 83 lm/W 89 lm/W		• • •		4222-B-5-393-XX 4222-B-5-394-XX 4222-B-5-395-XX
			2700 K 3000 K 4000 K	1670 lm 1670 lm 1780 lm	83 lm/W 83 lm/W 89 lm/W	• • •			4222-C-3-393-XX 4222-C-3-394-XX 4222-C-3-395-XX
			2700 K 3000 K 4000 K	1670 lm 1670 lm 1780 lm	83 lm/W 83 lm/W 89 lm/W		• • •		4222-C-5-393-XX 4222-C-5-394-XX 4222-C-5-395-XX
	20 W	27°	2700 K 3000 K 4000 K	1580 lm 1580 lm 1680 lm	79 lm/W 79 lm/W 84 lm/W	• • •			4222-H-3-393-XX 4222-H-3-394-XX 4222-H-3-395-XX
			2700 K 3000 K 4000 K	1580 lm 1580 lm 1680 lm	79 lm/W 79 lm/W 84 lm/W		• • •		4222-H-5-393-XX 4222-H-5-394-XX 4222-H-5-395-XX
			2700 K 3000 K 4000 K	1580 lm 1580 lm 1680 lm	79 lm/W 79 lm/W 84 lm/W	• • •			4222-U-3-393-XX 4222-U-3-394-XX 4222-U-3-395-XX
			2700 K 3000 K 4000 K	1120 lm 1120 lm 1190 lm	56 lm/W 56 lm/W 59 lm/W	• • •			4222-U-5-393-XX 4222-U-5-394-XX 4222-U-5-395-XX
	20 W	Asymmetric	2700 K 3000 K 4000 K	1120 lm 1120 lm 1190 lm	56 lm/W 56 lm/W 59 lm/W	• • •			4222-A-5-440-XX 4222-N-5-440-XX 4222-B-5-440-XX
			2700 K 3000 K 4000 K	1120 lm 1120 lm 1190 lm	56 lm/W 56 lm/W 59 lm/W		• • •		4222-C-5-440-XX 4222-H-5-440-XX
			2700 K 3000 K 4000 K	1120 lm 1120 lm 1190 lm	56 lm/W 56 lm/W 59 lm/W			•	4222-A-6-440-XX 4222-N-6-440-XX 4222-B-6-440-XX
	28 W	13° 13°/41° 26° 36° 41°/13°	RGBW RGBW RGBW RGBW RGBW	1730 lm 1560 lm 1530 lm 1460 lm 1560 lm	61 lm/W 55 lm/W 54 lm/W 52 lm/W 55 lm/W				4222-C-6-440-XX 4222-H-6-440-XX
			RGBW RGBW RGBW RGBW RGBW	1730 lm 1560 lm 1530 lm 1460 lm 1560 lm	59 lm/W 53 lm/W 52 lm/W 50 lm/W 53 lm/W			• • • • •	4222-A-3-387-XX 4222-A-3-388-XX 4222-A-3-389-XX
			2700 K 3000 K 4000 K	2690 lm 2690 lm 2870 lm	89 lm/W 89 lm/W 95 lm/W	• • •			4222-A-5-387-XX 4222-A-5-388-XX 4222-A-5-389-XX
	30 W	10°	2700 K 3000 K 4000 K	2260 lm 2260 lm 2410 lm	75 lm/W 75 lm/W 80 lm/W	• • •			4222-N-3-387-XX 4222-N-3-388-XX 4222-N-3-389-XX
			2700 K 3000 K 4000 K	2260 lm 2260 lm 2410 lm	75 lm/W 75 lm/W 80 lm/W		• • •		4222-N-5-387-XX 4222-N-5-388-XX 4222-N-5-389-XX
			2700 K 3000 K 4000 K	2390 lm 2390 lm 2550 lm	79 lm/W 79 lm/W 85 lm/W	• • •			4222-B-3-387-XX 4222-B-3-388-XX 4222-B-3-389-XX
	30 W	16°/44°	2700 K 3000 K 4000 K	2390 lm 2390 lm 2550 lm	79 lm/W 79 lm/W 85 lm/W		• • •		4222-B-5-387-XX 4222-B-5-388-XX 4222-B-5-389-XX
			2700 K 3000 K 4000 K	2390 lm 2390 lm 2550 lm	79 lm/W 79 lm/W 85 lm/W	• • •			4222-C-3-387-XX 4222-C-3-388-XX 4222-C-3-389-XX
			2700 K 3000 K 4000 K	2390 lm 2390 lm 2550 lm	79 lm/W 79 lm/W 85 lm/W		• • •		4222-C-5-387-XX 4222-C-5-388-XX 4222-C-5-389-XX
	30 W	27°	2700 K 3000 K 4000 K	2260 lm 2260 lm 2410 lm	75 lm/W 75 lm/W 80 lm/W	• • •			4222-H-3-387-XX 4222-H-3-388-XX 4222-H-3-389-XX
			2700 K 3000 K 4000 K	2260 lm 2260 lm 2410 lm	75 lm/W 75 lm/W 80 lm/W		• • •		4222-H-5-387-XX 4222-H-5-388-XX 4222-H-5-389-XX
			2700 K 3000 K 4000 K	2260 lm 2260 lm 2410 lm	75 lm/W 75 lm/W 80 lm/W	• • •			4222-U-3-387-XX 4222-U-3-388-XX 4222-U-3-389-XX
	30 W	40°	2700 K 3000 K 4000 K	1600 lm 1600 lm 1710 lm	53 lm/W 53 lm/W 57 lm/W	• • •			4222-U-5-387-XX 4222-U-5-388-XX 4222-U-5-389-XX
			2700 K 3000 K 4000 K	1600 lm 1600 lm 1710 lm	53 lm/W 53 lm/W 57 lm/W		• • •		4222-U-5-388-XX 4222-U-5-389-XX
			2700 K 3000 K 4000 K	1600 lm 1600 lm 1710 lm	53 lm/W 53 lm/W 57 lm/W			•	4222-U-5-387-XX 4222-U-5-388-XX 4222-U-5-389-XX

Halmstad Central Railway Station – SWEDEN



Private Residence – SWEDEN



MIRA

■ WALL SURFACE MOUNT



MIRA a family of small wall light characterized by clear and clean-cut line available in round and square body. The housing is made from copper free enhanced LM6 die-cast aluminum with high corrosion resistant property. The front glass cover is flush to the luminaire housing thus dust and water are not accumulated.

MIRA utilizes COB LED from industry renowned manufacturer and is available in 2700K, 3000K or 4000K, all are 3-step SDCM. The specular computer-aided-design reflector with spill light cut-off louver provides sharp light distribution on the surfaces.



www.unilamp.co.th/en/p/mira






Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Weather proof TPE grommet.
- Installation must be carried out according to the enclosed product manual.

Available Color



****Custom colors are available on request.**

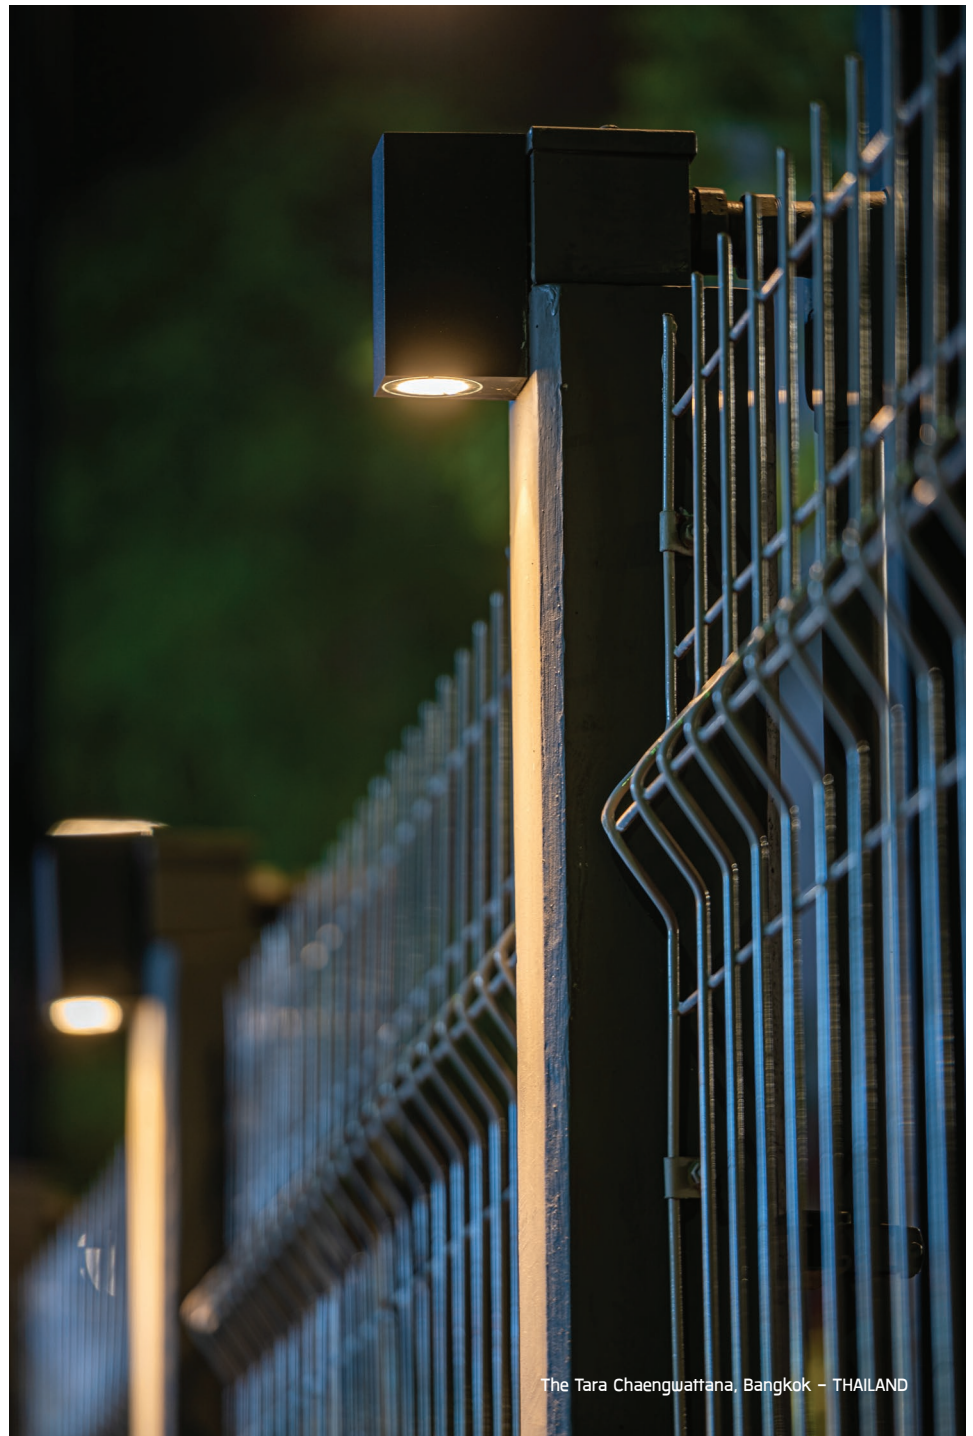


The Tara Chaengwattana, Bangkok – THAILAND

MIRA



Mini MIRA Round – Down Mini MIRA Round – Up / Down Mini MIRA Square – Down Mini MIRA Square – Up / Down

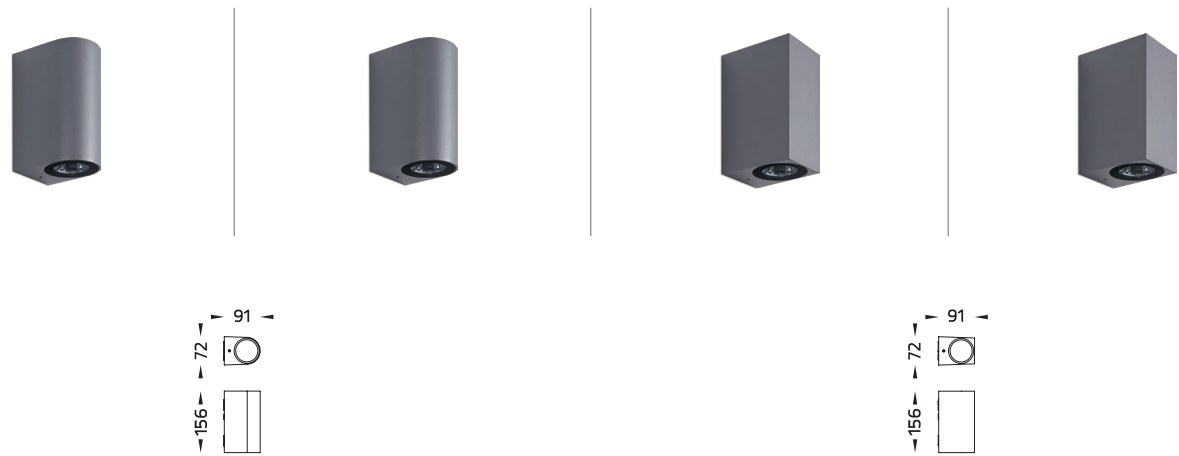

MIRA

Application Type : Wall surface mount
Subgroup : Directed wall light

Mini MIRA Round – Down/ 5060
Mini MIRA Round – Up / Down/ 5061
Mini MIRA Square – Down/ 5160
Mini MIRA Square – Up / Down/ 5161

Luminaire Performance

520 – 1500 lm
8 – 14 W
65 – 107 lm/W

Beam Options

Narrow

Wide

Color Temperature

2700K/ 3000K/ 4000K

Controller

On-off

Input Voltage

220–240VAC 50/60HZ

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller	Ordering Code	
									
Mini MIRA Round	OD-5060		8 W	18°	2700 K	520 lm	65 lm/W	• • •	5060-A-3-503-XX
	3000 K				540 lm	67 lm/W	5060-A-3-901-XX		
	4000 K				570 lm	71 lm/W	5060-A-3-904-XX		
	104°		3000 K	810 lm	101 lm/W	•	5060-F-3-901-XX		
		4000 K	860 lm	107 lm/W	•	5060-F-3-904-XX			
		Mini MIRA Square	OD-5061		14 W	18°	2700 K	920 lm	65 lm/W
3000 K	960 lm		68 lm/W				5061-A-3-901-XX		
4000 K	1000 lm		71 lm/W				5061-A-3-904-XX		
104°	2700 K		1380 lm		98 lm/W	•	5061-F-3-503-XX		
	3000 K		1440 lm	102 lm/W	•	5061-F-3-901-XX			
	4000 K		1500 lm	107 lm/W	•	5061-F-3-904-XX			
Mini MIRA Square	OD-5160		8 W	18°	2700 K	520 lm	65 lm/W	• •	5160-A-3-503-XX
	3000 K				540 lm	67 lm/W	5160-A-3-901-XX		
	2700 K				780 lm	97 lm/W	•		5160-F-3-503-XX
	104°		3000 K	810 lm	101 lm/W	•	5160-F-3-901-XX		
		14 W	18°	2700 K	920 lm	65 lm/W	•	5161-A-3-503-XX	
				4000 K	1000 lm	71 lm/W	•	5161-A-3-904-XX	
104°	2700 K			1380 lm	98 lm/W	•	5161-F-3-503-XX		
	3000 K		1440 lm	102 lm/W	•	5161-F-3-901-XX			
				4000 K	1500 lm	107 lm/W	•	5161-F-3-904-XX	

*Please contact sales team for special request.



Bonbeach Life Saving Club – AUSTRALIA

NEWLY Added TUBE

- BOLLARD
- CATENARY
- CEILING MOUNT
- CEILING RECESSED
- WALL SURFACE MOUNT

NEW!

Mini TUBE
Catenary



NEW!

Maxi TUBE
Wall surface mount



Content
by Application



Content
by Family

TUBE a family of cylindrical shaped wall light, ceiling light and area light. The body components are made from extruded aluminum and LM6 aluminum which make them highly corrosion resistant to any extreme environment. **TUBE** is protected from the ingress of dust and water and are used in both outdoor and indoor environments. Fitted with COB LED in three color temperature from 2700K, 3000K or 4000K with high CRI. **TUBE** can solve many lighting tasks in modern architectural surrounds and are generally used in illuminating columns and facades. The pole lights give a great level of downward light with symmetric / asymmetric / side throw light distributions.



www.unilamp.co.th/en/p/tube


Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum and extruded aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Weather proof TPE grommet.
- Installation must be carried out according to the enclosed product manual.

Available Color



****Custom colors are available on request.**

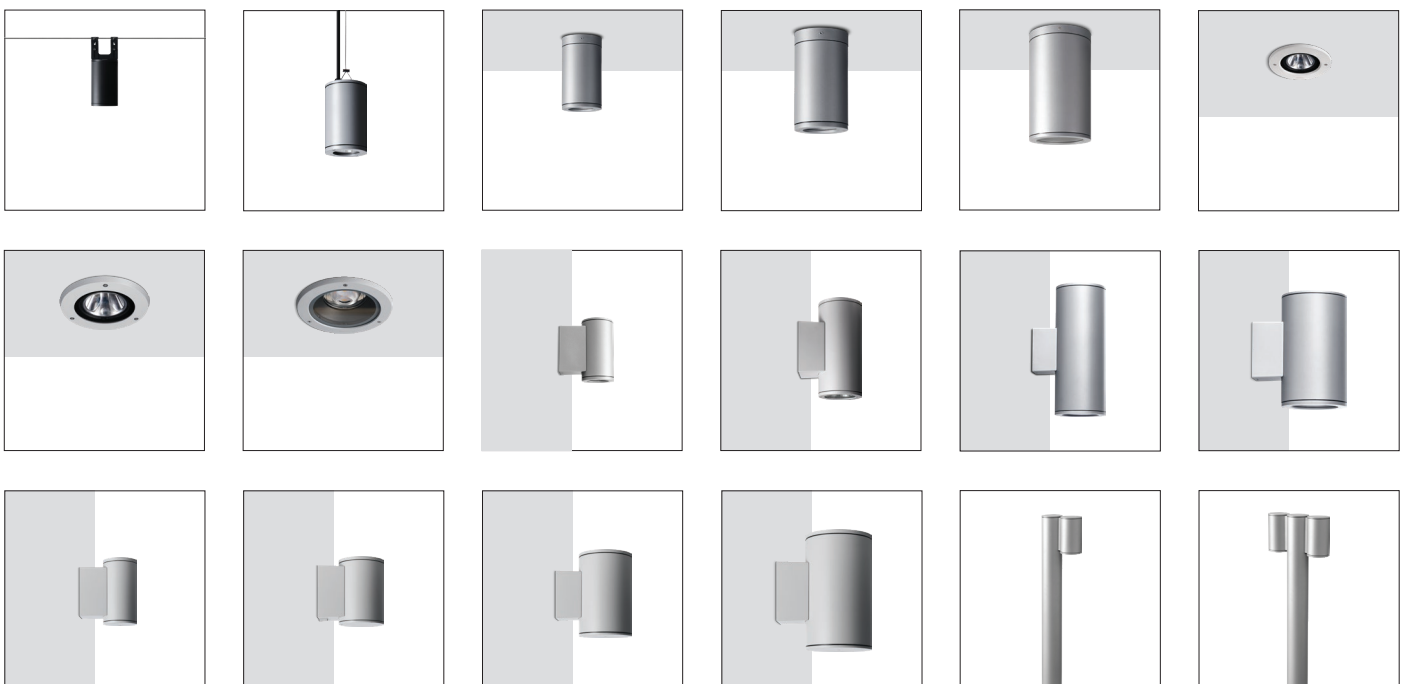

TUBE

IP66


IK08
07

3
SDCM

CRI
>80

UniShield16

Mini TUBE



TUBE

NEW!

Application Type : Catenary
Subgroup : Urban ambient

Mini TUBE / 1901	
Luminaire Performance	
1450 – 1760 lm	
14 – 15 W	
100 – 125 lm/W	
Beam Options	
Narrow	Medium
Wide	
Color Temperature	
2700K/ 3000K/ 4000K	
Controller	
On-Off/ 1-10V/ DALI/ CASAMBI	
Input Options	
220-240Vac 50/60Hz	


Accessories	
	Distribution box
	Distribution box
	IP68 Connector



Mini TUBE

Medium TUBE

Maxi TUBE

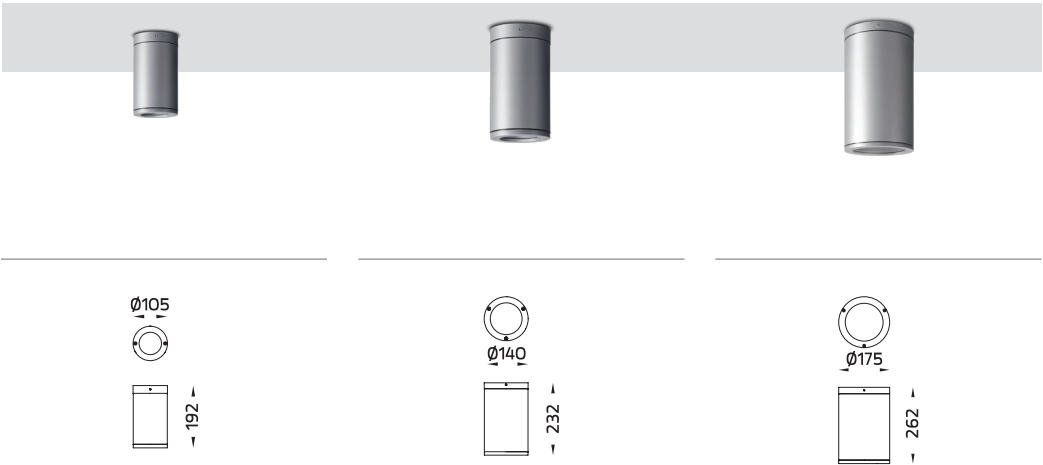

TUBE

Application Type : Ceiling mount
Subgroup : Directed ceiling light

Mini TUBE / 4001
Medium TUBE - DS / 4002
Maxi TUBE / 4003

Luminaire Performance

200 - 4790 lm
10 - 40 W
19 - 125 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K


Controller

On-Off/ On-Off [AC LED]/ 1-10V/ DALI

Input Options

220-240Vac 50/60Hz


Accessories

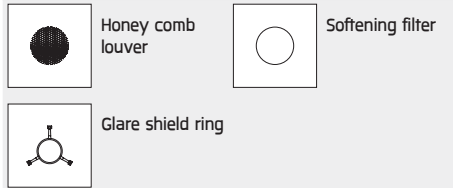


TUBE




Mini TUBE
Up/Down



Medium TUBE
Up/Down



Maxi TUBE
Up/Down



Maxi TUBE
Up/Down



RGBW

NEW!

TUBE

Application Type : Wall surface mount
Subgroup : Directed wall light/ Wall effect light

Mini Tube - Up/Down / 5001

Medium TUBE - Up/Down / 5002

Maxi TUBE - Up/Down / 5003

NEW!

Luminaire Performance

340 - 8940 lm

19 - 72 W

17 - 125 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K/ RGBW

Controller

On-Off/ On-Off [AC LED]/ 1-10V/ DALI/ DMX

Input Options

220-240Vac 50/60Hz

Accessories



Honey comb
louver




Softening filter




Glare shield ring




Mini TUBE
Down



Medium TUBE
Down



Maxi TUBE
Down



Maxi TUBE
Down



RGBW

NEW!

TUBE

Application Type : Wall surface mount
Subgroup : Directed wall light/ Wall effect light

Mini TUBE – Down / 5004

Medium TUBE – Down / 5005

Maxi TUBE – Down / 5006

NEW!

Luminaire Performance

160 – 4790 lm

10 – 40 W

15 – 125 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K/ RGBW

Controller

On-Off/ On-Off (AC LED)/ 1-10V/ DALI/ DMX

Input Options

220-240Vac 50/60Hz

Accessories



Honey comb
louver



Softening filter




Glare shield ring


TUBE




Mini TUBE
Up



Medium TUBE
Up



Maxi TUBE
Up




Maxi TUBE
Up

NEW!



RGBW



TUBE

Application Type : Wall surface mount
Subgroup : Directed wall light/ Wall effect light

Mini TUBE – Up / 5044
Medium TUBE – Up / 5045
Maxi TUBE – Up / 5046

NEW!

Luminaire Performance

160 – 4660 lm

10 – 40 W

15 – 125 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K/ RGBW

Controller

On–Off/ On–Off (AC LED)/ 1–10V/ DALI/ DMX

Input Options

220–240Vac 50/60Hz

Accessories



Honey comb
louver



Softening filter




Glare shield ring



Mini TUBE



Mini TUBE – DS



TUBE

Application Type : Bollard
Subgroup : Shielded bollard

Mini TUBE / 7144	
Mini TUBE – DS / 7145	
Luminaire Performance	
700 – 3520 lm	
11 – 32 W	
62 – 125 lm/W	
Beam Options	
Narrow	Medium
Wide	Forward Throw
Side Throw	
Color Temperature	
2700K/ 3000K/ 4000K	
Controller	
On-Off/ 1-10V/ DALI/ CASAMBI	
Input Options	
220-240Vac 50/60Hz	

Accessories	
	Anchor bolt





TUBE



Mini TUBE

Medium TUBE

Maxi TUBE



TUBE

Application Type : Ceiling recessed

Subgroup : Directed ceiling light/ Ceiling effect light

Maxi TUBE / 7304

Mini TUBE / 7312

Medium TUBE / 7350


Luminaire Performance

200 - 4790 lm

10 - 40 W

19 - 119 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

On-Off/ On-Off [AC LED]/ 1-10V/ DALI

Input Options

220-240Vac 50/60Hz

Accessories



Honey comb
louver



Softening filter



Glare shield ring



Pre-wired Cable



Bonbeach Life Saving Club – AUSTRALIA



Polaris Residence, Bangkok – THAILAND



Terminal 21 Korat, Nakhon Ratchasima – THAILAND

TUBE

Mini TUBE

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller						Ordering Code
										CASAMBI		
OD-1901 	14 W	13°	2700 K	1580 lm	112 lm/W	•						1901-A-3-503-XX
			3000 K	1670 lm	119 lm/W	•						1901-A-3-901-XX
			4000 K	1750 lm	125 lm/W	•						1901-A-3-904-XX
			2700 K	1580 lm	112 lm/W			•				1901-A-4-503-XX
			3000 K	1670 lm	119 lm/W			•				1901-A-4-901-XX
			4000 K	1750 lm	125 lm/W			•				1901-A-4-904-XX
			2700 K	1580 lm	112 lm/W				•			1901-A-5-503-XX
			3000 K	1670 lm	119 lm/W				•			1901-A-5-901-XX
			4000 K	1750 lm	125 lm/W				•			1901-A-5-904-XX
			2700 K	1580 lm	112 lm/W					•		1901-A-A-503-XX
			3000 K	1670 lm	119 lm/W					•		1901-A-A-901-XX
			4000 K	1750 lm	125 lm/W					•		1901-A-A-904-XX
	14 W	20°	2700 K	1520 lm	108 lm/W	•						1901-B-3-503-XX
			3000 K	1600 lm	114 lm/W	•						1901-B-3-901-XX
			4000 K	1670 lm	119 lm/W	•						1901-B-3-904-XX
			2700 K	1520 lm	108 lm/W			•				1901-B-4-503-XX
			3000 K	1600 lm	114 lm/W			•				1901-B-4-901-XX
			4000 K	1670 lm	119 lm/W			•				1901-B-4-904-XX
			2700 K	1520 lm	108 lm/W				•			1901-B-5-503-XX
			3000 K	1600 lm	114 lm/W				•			1901-B-5-901-XX
			4000 K	1670 lm	119 lm/W				•			1901-B-5-904-XX
			2700 K	1520 lm	108 lm/W					•		1901-B-A-503-XX
			3000 K	1600 lm	114 lm/W					•		1901-B-A-901-XX
			4000 K	1670 lm	119 lm/W					•		1901-B-A-904-XX
	14 W	50°	2700 K	1450 lm	103 lm/W	•						1901-D-3-503-XX
			3000 K	1530 lm	109 lm/W	•						1901-D-3-901-XX
			4000 K	1600 lm	114 lm/W	•						1901-D-3-904-XX
			2700 K	1450 lm	103 lm/W			•				1901-D-4-503-XX
			3000 K	1530 lm	109 lm/W			•				1901-D-4-901-XX
			4000 K	1600 lm	114 lm/W			•				1901-D-4-904-XX
			2700 K	1450 lm	103 lm/W				•			1901-D-5-503-XX
			3000 K	1530 lm	109 lm/W				•			1901-D-5-901-XX
			4000 K	1600 lm	114 lm/W				•			1901-D-5-904-XX
			2700 K	1450 lm	103 lm/W					•		1901-D-A-503-XX
			3000 K	1530 lm	109 lm/W					•		1901-D-A-901-XX
			4000 K	1600 lm	114 lm/W					•		1901-D-A-904-XX
	15 W	13°	2700 K	1590 lm	106 lm/W	•						1901-5-3-503-XX
			3000 K	1680 lm	112 lm/W	•						1901-5-3-901-XX
			4000 K	1760 lm	117 lm/W	•						1901-5-3-904-XX
			2700 K	1590 lm	106 lm/W			•				1901-5-4-503-XX
			3000 K	1680 lm	112 lm/W			•				1901-5-4-901-XX
			4000 K	1760 lm	117 lm/W			•				1901-5-4-904-XX
			2700 K	1590 lm	106 lm/W				•			1901-5-5-503-XX
			3000 K	1680 lm	112 lm/W				•			1901-5-5-901-XX
			4000 K	1760 lm	117 lm/W				•			1901-5-5-904-XX
			2700 K	1590 lm	106 lm/W					•		1901-5-A-503-XX
			3000 K	1680 lm	112 lm/W					•		1901-5-A-901-XX
			4000 K	1760 lm	117 lm/W					•		1901-5-A-904-XX
	15 W	26°	2700 K	1540 lm	102 lm/W	•						1901-6-3-503-XX
			3000 K	1620 lm	108 lm/W	•						1901-6-3-901-XX
			4000 K	1700 lm	113 lm/W	•						1901-6-3-904-XX
			2700 K	1540 lm	102 lm/W			•				1901-6-4-503-XX
			3000 K	1620 lm	108 lm/W			•				1901-6-4-901-XX
			4000 K	1700 lm	113 lm/W			•				1901-6-4-904-XX
			2700 K	1540 lm	102 lm/W				•			1901-6-5-503-XX
			3000 K	1620 lm	108 lm/W				•			1901-6-5-901-XX
			4000 K	1700 lm	113 lm/W				•			1901-6-5-904-XX
			2700 K	1540 lm	102 lm/W					•		1901-6-A-503-XX
			3000 K	1620 lm	108 lm/W					•		1901-6-A-901-XX
			4000 K	1700 lm	113 lm/W					•		1901-6-A-904-XX
	15 W	48°	2700 K	1500 lm	100 lm/W	•						1901-7-3-503-XX
			3000 K	1580 lm	105 lm/W	•						1901-7-3-901-XX
			4000 K	1660 lm	110 lm/W	•						1901-7-3-904-XX
			2700 K	1500 lm	100 lm/W			•				1901-7-4-503-XX
			3000 K	1580 lm	105 lm/W			•				1901-7-4-901-XX
			4000 K	1660 lm	110 lm/W			•				1901-7-4-904-XX
			2700 K	1500 lm	100 lm/W				•			1901-7-5-503-XX
			3000 K	1580 lm	105 lm/W				•			1901-7-5-901-XX
			4000 K	1660 lm	110 lm/W				•			1901-7-5-904-XX
			2700 K	1500 lm	100 lm/W					•		1901-7-A-503-XX
			3000 K	1580 lm	105 lm/W					•		1901-7-A-901-XX
			4000 K	1660 lm	110 lm/W					•		1901-7-A-904-XX

*Please contact sales team for special request.

Mini TUBE

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller						Ordering Code
												
OD-4001 	10 W	Sharp Elliptical V	2700 K	200 lm	20 lm/W	•						4001-Q-3-646-XX
			3000 K	200 lm	20 lm/W	•						4001-Q-3-647-XX
			4000 K	210 lm	21 lm/W	•						4001-Q-3-648-XX
			2700 K	200 lm	20 lm/W			•				4001-Q-4-646-XX
			3000 K	200 lm	20 lm/W			•				4001-Q-4-647-XX
			4000 K	210 lm	21 lm/W			•				4001-Q-4-648-XX
			2700 K	200 lm	20 lm/W				•			4001-Q-5-646-XX
			3000 K	200 lm	20 lm/W				•			4001-Q-5-647-XX
			4000 K	210 lm	21 lm/W				•			4001-Q-5-648-XX
			2700 K	1580 lm	112 lm/W	•						4001-A-3-503-XX
			3000 K	1670 lm	119 lm/W	•						4001-A-3-901-XX
			4000 K	1750 lm	125 lm/W	•						4001-A-3-904-XX
	14 W	13°	2700 K	1580 lm	112 lm/W			•				4001-A-4-503-XX
			3000 K	1670 lm	119 lm/W			•				4001-A-4-901-XX
			4000 K	1750 lm	125 lm/W			•				4001-A-4-904-XX
			2700 K	1580 lm	112 lm/W				•			4001-A-5-503-XX
			3000 K	1670 lm	119 lm/W				•			4001-A-5-901-XX
			4000 K	1750 lm	125 lm/W				•			4001-A-5-904-XX
			2700 K	1520 lm	108 lm/W	•						4001-B-3-503-XX
			3000 K	1600 lm	114 lm/W	•						4001-B-3-901-XX
			4000 K	1670 lm	119 lm/W	•						4001-B-3-904-XX
			2700 K	1520 lm	108 lm/W			•				4001-B-4-503-XX
			3000 K	1600 lm	114 lm/W			•				4001-B-4-901-XX
			4000 K	1670 lm	119 lm/W			•				4001-B-4-904-XX
	14 W	20°	2700 K	1520 lm	108 lm/W				•			4001-B-5-503-XX
			3000 K	1600 lm	114 lm/W				•			4001-B-5-901-XX
			4000 K	1670 lm	119 lm/W				•			4001-B-5-904-XX
			2700 K	1450 lm	103 lm/W	•						4001-D-3-503-XX
			3000 K	1530 lm	109 lm/W	•						4001-D-3-901-XX
			4000 K	1600 lm	114 lm/W	•						4001-D-3-904-XX
			2700 K	1450 lm	103 lm/W			•				4001-D-4-503-XX
			3000 K	1530 lm	109 lm/W			•				4001-D-4-901-XX
			4000 K	1600 lm	114 lm/W			•				4001-D-4-904-XX
			2700 K	1450 lm	103 lm/W				•			4001-D-5-503-XX
			3000 K	1530 lm	109 lm/W				•			4001-D-5-901-XX
			4000 K	1600 lm	114 lm/W				•			4001-D-5-904-XX
	15 W	13°	2700 K	1590 lm	106 lm/W	•						4001-5-3-503-XX
			3000 K	1680 lm	112 lm/W	•						4001-5-3-901-XX
			4000 K	1760 lm	117 lm/W	•						4001-5-3-904-XX
	15 W	26°	2700 K	1540 lm	102 lm/W	•						4001-6-3-503-XX
			3000 K	1620 lm	108 lm/W	•						4001-6-3-901-XX
			4000 K	1700 lm	113 lm/W	•						4001-6-3-904-XX
			3000 K	1620 lm	108 lm/W				•			4001-6-5-901-XX
	15 W	48°	2700 K	1500 lm	100 lm/W	•						4001-7-3-503-XX
			3000 K	1580 lm	105 lm/W	•						4001-7-3-901-XX
			4000 K	1660 lm	110 lm/W	•						4001-7-3-904-XX
			2700 K	1500 lm	100 lm/W				•			4001-7-5-503-XX
			3000 K	1580 lm	105 lm/W				•			4001-7-5-901-XX
			2700 K	290 lm	19 lm/W	•						4001-Q-3-630-XX
	15 W	Sharp Elliptical V	3000 K	290 lm	19 lm/W	•						4001-Q-3-644-XX
			4000 K	300 lm	20 lm/W	•						4001-Q-3-645-XX
			2700 K	290 lm	19 lm/W			•				4001-Q-4-630-XX
			3000 K	290 lm	19 lm/W			•				4001-Q-4-644-XX
			4000 K	300 lm	20 lm/W			•				4001-Q-4-645-XX
			2700 K	290 lm	19 lm/W				•			4001-Q-5-630-XX
			3000 K	290 lm	19 lm/W				•			4001-Q-5-644-XX
			4000 K	300 lm	20 lm/W				•			4001-Q-5-645-XX
			4000 K	2260 lm	118 lm/W	•						4002-5-3-905-XX
	19 W	12°	4000 K	2260 lm	118 lm/W	•						4002-5-3-905-XX
		23°	4000 K	2230 lm	117 lm/W	•						4002-6-3-905-XX
			3000 K	2180 lm	114 lm/W				•			4002-6-5-902-XX
		48°	3000 K	1910 lm	100 lm/W	•						4002-7-3-902-XX
			4000 K	1950 lm	102 lm/W	•						4002-7-3-905-XX
			3000 K	1910 lm	100 lm/W				•			4002-7-5-902-XX
	20 W	Asymmetric	3000 K	1840 lm	96 lm/W				•			4002-9-5-902-XX
		16°	3000 K	1120 lm	56 lm/W			•				4002-6-3-873-XX
		38°	3000 K	1160 lm	58 lm/W			•				4002-7-3-873-XX
			4000 K	1220 lm	61 lm/W			•				4002-7-3-874-XX
		Asymmetric	4000 K	1160 lm	58 lm/W			•				4002-9-3-874-XX
		29°	3000 K	1720 lm	86 lm/W				•			4002-B-4-535-XX
	20 W	50°	3000 K	1570 lm	78 lm/W	•						4002-D-3-535-XX
			2700 K	1570 lm	78 lm/W				•			4002-D-5-534-XX
OD-4003 	20 W	38°	3000 K	1070 lm	53 lm/W		•					4003-7-3-506-XX
			4000 K	1120 lm	56 lm/W		•					4003-7-3-874-XX
	27 W	23°	3000 K	3110 lm	115 lm/W	•						4003-6-3-887-XX
			3000 K	2630 lm	97 lm/W	•						4003-7-3-887-XX
	27 W	48°	4000 K	2700 lm	100 lm/W	•						4003-7-3-891-XX
			2700 K	2520 lm	93 lm/W				•			4003-7-5-506-XX
			3000 K	2630 lm	97 lm/W				•			4003-7-5-887-XX
	30 W	Asymmetric	3000 K	1860 lm	62 lm/W		•					4003-9-3-877-XX
		12°	4000 K	4790 lm	119 lm/W	•						4003-5-3-905-XX
	40 W	23°	2700 K	4320 lm	108 lm/W	•						4003-6-3-505-XX
			3000 K	3810 lm	95 lm/W	•						4003-7-3-902-XX
		48°	4000 K	3920 lm	98 lm/W	•						4003-7-3-905-XX

TUBE

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller						Ordering Code
Mini TUBE Up/Down	OD-5001 	19 W	Sharp Elliptical V	2700 K	340 lm	17 lm/W	•						5001-Q-3-646-XX
				3000 K	340 lm	17 lm/W	•						5001-Q-3-647-XX
				4000 K	370 lm	19 lm/W	•						5001-Q-3-648-XX
				2700 K	340 lm	17 lm/W			•				5001-Q-4-646-XX
				3000 K	340 lm	17 lm/W			•				5001-Q-4-647-XX
				4000 K	370 lm	19 lm/W			•				5001-Q-4-648-XX
				2700 K	340 lm	17 lm/W				•			5001-Q-5-646-XX
				3000 K	340 lm	17 lm/W				•			5001-Q-5-647-XX
				4000 K	370 lm	19 lm/W				•			5001-Q-5-648-XX
		27 W	13°	2700 K	2980 lm	110 lm/W	•						5001-A-3-503-XX
				3000 K	3140 lm	116 lm/W	•						5001-A-3-901-XX
				4000 K	3290 lm	121 lm/W	•						5001-A-3-904-XX
				2700 K	2980 lm	110 lm/W			•				5001-A-4-503-XX
				3000 K	3140 lm	116 lm/W			•				5001-A-4-901-XX
				4000 K	3290 lm	121 lm/W			•				5001-A-4-904-XX
				2700 K	2980 lm	110 lm/W				•			5001-A-5-503-XX
				3000 K	3140 lm	116 lm/W				•			5001-A-5-901-XX
				4000 K	3290 lm	121 lm/W				•			5001-A-5-904-XX
		27 W	20°	2700 K	2870 lm	106 lm/W	•						5001-B-3-503-XX
				3000 K	3020 lm	111 lm/W	•						5001-B-3-901-XX
				4000 K	3160 lm	117 lm/W	•						5001-B-3-904-XX
				2700 K	2870 lm	106 lm/W			•				5001-B-4-503-XX
				3000 K	3020 lm	111 lm/W			•				5001-B-4-901-XX
				4000 K	3160 lm	117 lm/W			•				5001-B-4-904-XX
				2700 K	2870 lm	106 lm/W				•			5001-B-5-503-XX
				3000 K	3020 lm	111 lm/W				•			5001-B-5-901-XX
				4000 K	3160 lm	117 lm/W				•			5001-B-5-904-XX
		27 W	50°	2700 K	2810 lm	104 lm/W	•						5001-D-3-503-XX
				3000 K	2960 lm	109 lm/W	•						5001-D-3-901-XX
				4000 K	3100 lm	114 lm/W	•						5001-D-3-904-XX
				2700 K	2810 lm	104 lm/W			•				5001-D-4-503-XX
				3000 K	2960 lm	109 lm/W			•				5001-D-4-901-XX
				4000 K	3100 lm	114 lm/W			•				5001-D-4-904-XX
				2700 K	2810 lm	104 lm/W				•			5001-D-5-503-XX
				3000 K	2960 lm	109 lm/W				•			5001-D-5-901-XX
				4000 K	3100 lm	114 lm/W				•			5001-D-5-904-XX
		28 W	13°	3000 K	3360 lm	120 lm/W	•						5001-5-3-901-XX
				4000 K	3520 lm	125 lm/W	•						5001-5-3-904-XX
				3000 K	3360 lm	120 lm/W			•				5001-5-5-901-XX
		28 W	26°	3000 K	3240 lm	115 lm/W	•						5001-6-3-901-XX
				4000 K	3400 lm	121 lm/W	•						5001-6-3-904-XX
				3000 K	3240 lm	115 lm/W				•			5001-6-5-901-XX
		28 W	48°	4000 K	3400 lm	121 lm/W				•			5001-6-5-904-XX
				3000 K	3160 lm	112 lm/W	•						5001-7-3-901-XX
				4000 K	3320 lm	118 lm/W	•						5001-7-3-904-XX
		28 W	48°	3000 K	3160 lm	112 lm/W				•			5001-7-5-901-XX
				4000 K	3320 lm	118 lm/W				•			5001-7-5-904-XX
		28 W	Sharp Elliptical V	2700 K	500 lm	17 lm/W	•						5001-Q-3-630-XX
				3000 K	500 lm	17 lm/W	•						5001-Q-3-644-XX
				4000 K	530 lm	18 lm/W	•						5001-Q-3-645-XX
				2700 K	500 lm	17 lm/W			•				5001-Q-4-630-XX
				3000 K	500 lm	17 lm/W			•				5001-Q-4-644-XX
				4000 K	530 lm	18 lm/W			•				5001-Q-4-645-XX
				2700 K	500 lm	17 lm/W				•			5001-Q-5-630-XX
				3000 K	500 lm	17 lm/W				•			5001-Q-5-644-XX
				4000 K	530 lm	18 lm/W				•			5001-Q-5-645-XX
Medium TUBE Up/Down	OD-5002 	37 W	12°	4000 K	4520 lm	122 lm/W	•						5002-5-3-905-XX
			23°	3000 K	4360 lm	117 lm/W	•						5002-6-3-902-XX
				4000 K	4460 lm	120 lm/W	•						5002-6-3-905-XX
			48°	3000 K	3820 lm	103 lm/W	•						5002-7-3-902-XX
				4000 K	3900 lm	105 lm/W	•						5002-7-3-905-XX
			Asymmetric	3000 K	3680 lm	99 lm/W	•						5002-9-3-902-XX
		40 W		4000 K	3760 lm	101 lm/W	•						5002-9-3-905-XX
			10°	3000 K	2460 lm	61 lm/W		•					5002-5-3-873-XX
			38°	3000 K	2320 lm	58 lm/W		•					5002-7-3-873-XX
			Asymmetric	3000 K	2220 lm	55 lm/W		•					5002-9-3-873-XX
				4000 K	2320 lm	58 lm/W		•					5002-9-3-874-XX
		40 W	16°	3000 K	2180 lm	54 lm/W		•					5003-6-3-873-XX
			38°	4000 K	2240 lm	56 lm/W		•					5003-7-3-874-XX
			Asymmetric	3000 K	2220 lm	55 lm/W		•					5003-9-3-873-XX
			12°	3000 K	6420 lm	123 lm/W	•						5003-5-3-887-XX
			Asymmetric	3000 K	5060 lm	97 lm/W	•						5003-9-3-887-XX
				4000 K	5180 lm	99 lm/W	•						5003-9-3-891-XX
		60 W	22°	3000 K	3800 lm	63 lm/W		•					5003-6-3-877-XX
				3000 K	8940 lm	124 lm/W	•						5003-5-3-902-XX
			12°	3000 K	8940 lm	124 lm/W			•				5003-5-4-902-XX
			23°	3000 K	8650 lm	120 lm/W	•						5003-6-3-902-XX
			48°	3000 K	7320 lm	101 lm/W	•						5003-7-3-902-XX
				4000 K	7480 lm	103 lm/W	•						5003-7-3-905-XX
Maxi TUBE Up/Down	OD-5003 	72 W	Asymmetric	3000 K	6820 lm	94 lm/W	•						5003-9-3-902-XX
				4000 K	7020 lm	97 lm/W	•						5003-9-3-905-XX
		52 W	12°	3000 K	6420 lm	123 lm/W	•						5003-5-3-887-XX
			Asymmetric	3000 K	5060 lm	97 lm/W	•						5003-9-3-887-XX
				4000 K	5180 lm	99 lm/W	•						5003-9-3-891-XX
			22°	3000 K	3800 lm	63 lm/W		•					5003-6-3-877-XX
		40 W	16°	3000 K	2180 lm	54 lm/W		•					5003-6-3-873-XX
			38°	4000 K	2240 lm	56 lm/W		•					5003-7-3-874-XX
			Asymmetric	3000 K	2220 lm	55 lm/W		•					5003-9-3-873-XX
			12°	3000 K	6420 lm	123 lm/W	•						5003-5-3-887-XX
			Asymmetric	3000 K	5060 lm	97 lm/W	•						5003-9-3-887-XX
				4000 K	5180 lm	99 lm/W	•						5003-9-3-891-XX

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller						Ordering Code		
											CASAMBI				
Maxi TUBE Up/Down	OD-5003 	46 W	14°	RGBW	1900 lm	41 lm/W						•	5003-A-6-440-XX		
	26°		RGBW	1840 lm	40 lm/W						•	5003-B-6-440-XX			
	36°		RGBW	1760 lm	38 lm/W						•	5003-C-6-440-XX			
	40°/15°		RGBW	1860 lm	40 lm/W						•	5003-H-6-440-XX			
	15°/40°		RGBW	1860 lm	40 lm/W						•	5003-N-6-440-XX			
Mini TUBE Down	OD-5004 	10 W	Sharp Elliptical V	2700 K	160 lm	16 lm/W	•						5004-Q-3-646-XX		
	3000 K			160 lm	16 lm/W	•							5004-Q-3-647-XX		
	4000 K			170 lm	17 lm/W	•							5004-Q-3-648-XX		
	2700 K			160 lm	16 lm/W			•					5004-Q-4-646-XX		
	3000 K			160 lm	16 lm/W			•					5004-Q-4-647-XX		
	4000 K			170 lm	17 lm/W			•					5004-Q-4-648-XX		
	14 W	13°	2700 K	160 lm	16 lm/W				•				5004-Q-5-646-XX		
			3000 K	160 lm	16 lm/W				•				5004-Q-5-647-XX		
			4000 K	170 lm	17 lm/W				•				5004-Q-5-648-XX		
			2700 K	1580 lm	112 lm/W	•							5004-A-3-503-XX		
			3000 K	1670 lm	119 lm/W	•							5004-A-3-901-XX		
			4000 K	1750 lm	125 lm/W	•							5004-A-3-904-XX		
	14 W	13°	2700 K	1580 lm	112 lm/W			•					5004-A-4-503-XX		
			3000 K	1670 lm	119 lm/W			•					5004-A-4-901-XX		
			4000 K	1750 lm	125 lm/W			•					5004-A-4-904-XX		
			2700 K	1580 lm	112 lm/W				•				5004-A-5-503-XX		
			3000 K	1670 lm	119 lm/W				•				5004-A-5-901-XX		
			4000 K	1750 lm	125 lm/W				•				5004-A-5-904-XX		
	14 W	20°	2700 K	1520 lm	108 lm/W	•							5004-B-3-503-XX		
			3000 K	1600 lm	114 lm/W	•							5004-B-3-901-XX		
			4000 K	1670 lm	119 lm/W	•							5004-B-3-904-XX		
			2700 K	1520 lm	108 lm/W			•					5004-B-4-503-XX		
			3000 K	1600 lm	114 lm/W			•					5004-B-4-901-XX		
			4000 K	1670 lm	119 lm/W			•					5004-B-4-904-XX		
	14 W	50°	2700 K	1450 lm	103 lm/W	•							5004-D-3-503-XX		
			3000 K	1530 lm	109 lm/W	•							5004-D-3-901-XX		
			4000 K	1600 lm	114 lm/W	•							5004-D-3-904-XX		
			2700 K	1450 lm	103 lm/W			•					5004-D-4-503-XX		
			3000 K	1530 lm	109 lm/W			•					5004-D-4-901-XX		
			4000 K	1600 lm	114 lm/W			•					5004-D-4-904-XX		
	15 W	13°	2700 K	1450 lm	103 lm/W					•			5004-D-5-503-XX		
			3000 K	1530 lm	109 lm/W					•			5004-D-5-901-XX		
			4000 K	1600 lm	114 lm/W					•			5004-D-5-904-XX		
			3000 K	1680 lm	112 lm/W	•			•				5004-5-3-901-XX		
			3000 K	1680 lm	112 lm/W	•			•				5004-5-4-901-XX		
			4000 K	1700 lm	113 lm/W				•				5004-6-5-904-XX		
	15 W	48°	3000 K	1580 lm	105 lm/W	•							5004-7-3-901-XX		
			4000 K	1660 lm	110 lm/W	•							5004-7-3-904-XX		
			3000 K	1580 lm	105 lm/W			•					5004-7-4-901-XX		
			3000 K	1580 lm	105 lm/W				•				5004-7-5-901-XX		
			4000 K	1660 lm	110 lm/W				•				5004-7-5-904-XX		
			2700 K	230 lm	15 lm/W	•							5004-Q-3-630-XX		
	15 W	Sharp Elliptical V	3000 K	230 lm	15 lm/W	•							5004-Q-3-644-XX		
			4000 K	240 lm	16 lm/W	•							5004-Q-3-645-XX		
			2700 K	230 lm	15 lm/W			•					5004-Q-4-630-XX		
			3000 K	230 lm	15 lm/W			•					5004-Q-4-644-XX		
			4000 K	240 lm	16 lm/W			•					5004-Q-4-645-XX		
			2700 K	230 lm	15 lm/W				•				5004-Q-5-630-XX		
	20 W	16°	3000 K	230 lm	15 lm/W					•			5004-Q-5-644-XX		
			4000 K	240 lm	16 lm/W					•			5004-Q-5-645-XX		
			2700 K	230 lm	15 lm/W								5004-Q-5-646-XX		
			3000 K	230 lm	15 lm/W								5004-Q-5-647-XX		
			4000 K	240 lm	16 lm/W								5004-Q-5-648-XX		
			2700 K	230 lm	15 lm/W								5004-Q-5-649-XX		
	Medium TUBE Down	OD-5005 	19 W	23°	3000 K	2180 lm	114 lm/W	•						5005-6-3-902-XX	
				48°	3000 K	2180 lm	114 lm/W				•				5005-6-5-902-XX
					3000 K	1910 lm	100 lm/W	•							5005-7-3-902-XX
4000 K					1950 lm	102 lm/W	•							5005-7-3-905-XX	
Asymmetric				3000 K	1840 lm	96 lm/W	•							5005-9-3-902-XX	
				4000 K	1880 lm	98 lm/W	•							5005-9-3-905-XX	
			4000 K	1880 lm	98 lm/W					•			5005-9-5-905-XX		
20 W			16°	3000 K	1120 lm	56 lm/W			•					5005-6-3-873-XX	
			38°	3000 K	1160 lm	58 lm/W			•					5005-7-3-873-XX	
			Asymmetric	4000 K	1160 lm	58 lm/W			•					5005-9-3-874-XX	
Maxi TUBE Down			OD-5006 	20 W	16°	3000 K	1090 lm	54 lm/W			•				5006-6-3-873-XX
					38°	3000 K	1070 lm	53 lm/W				•			
	Asymmetric	3000 K			1110 lm	55 lm/W				•				5006-9-3-873-XX	
		4000 K			1160 lm	58 lm/W				•				5006-9-3-874-XX	
	27 W	48°		3000 K	2630 lm	97 lm/W	•							5006-7-3-887-XX	
		4000 K		2700 lm	100 lm/W	•								5006-7-3-891-XX	
	30 W	Asymmetric		3000 K	2530 lm	93 lm/W	•							5006-9-3-887-XX	
		Asymmetric		3000 K	1860 lm	62 lm/W			•					5006-9-3-877-XX	
	40 W	12°		4000 K	4790 lm	119 lm/W	•							5006-5-3-905-XX	
		48°		3000 K	3810 lm	95 lm/W	•							5006-7-3-902-XX	

TUBE

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller						Ordering Code
											CASAMBI		
Maxi TUBE Down	<div>OD-5006</div> <div></div> <div>RGBW</div>	40 W	Asymmetric	3000 K	3570 lm	89 lm/W	•						5006-9-3-902-XX
				4000 K	3660 lm	91 lm/W	•						5006-9-3-905-XX
				3000 K	3570 lm	89 lm/W				•			5006-9-5-902-XX
		27 W	14°	RGBW	950 lm	35 lm/W						•	5006-A-6-440-XX
				RGBW	920 lm	34 lm/W						•	5006-B-6-440-XX
				RGBW	880 lm	32 lm/W						•	5006-C-6-440-XX
				RGBW	930 lm	34 lm/W						•	5006-H-6-440-XX
				RGBW	930 lm	34 lm/W						•	5006-N-6-440-XX
			26°	RGBW	920 lm	34 lm/W							
				RGBW	880 lm	32 lm/W							
		40°/15°	15°/40°	RGBW	930 lm	34 lm/W							
				RGBW	930 lm	34 lm/W							
Mini TUBE Up	<div>OD-5044</div> <div></div>	10 W	Sharp Elliptical V	2700 K	160 lm	16 lm/W	•						5044-Q-3-646-XX
				3000 K	160 lm	16 lm/W	•						5044-Q-3-647-XX
				4000 K	170 lm	17 lm/W	•						5044-Q-3-648-XX
				2700 K	160 lm	16 lm/W			•				5044-Q-4-646-XX
				3000 K	160 lm	16 lm/W			•				5044-Q-4-647-XX
		14 W	13°	4000 K	170 lm	17 lm/W			•				5044-Q-4-648-XX
				2700 K	160 lm	16 lm/W				•			5044-Q-5-646-XX
				3000 K	160 lm	16 lm/W				•			5044-Q-5-647-XX
				4000 K	170 lm	17 lm/W				•			5044-Q-5-648-XX
				2700 K	1580 lm	112 lm/W	•						5044-A-3-503-XX
		14 W	20°	3000 K	1670 lm	119 lm/W	•						5044-A-3-901-XX
				4000 K	1750 lm	125 lm/W	•						5044-A-3-904-XX
				2700 K	1580 lm	112 lm/W			•				5044-A-4-503-XX
				3000 K	1670 lm	119 lm/W			•				5044-A-4-901-XX
				4000 K	1750 lm	125 lm/W			•				5044-A-4-904-XX
		14 W	50°	2700 K	1580 lm	112 lm/W				•			5044-A-5-503-XX
				3000 K	1670 lm	119 lm/W				•			5044-A-5-901-XX
				4000 K	1750 lm	125 lm/W				•			5044-A-5-904-XX
				2700 K	1520 lm	108 lm/W	•						5044-B-3-503-XX
				3000 K	1600 lm	114 lm/W	•						5044-B-3-901-XX
		14 W	13°	4000 K	1670 lm	119 lm/W	•						5044-B-3-904-XX
				2700 K	1520 lm	108 lm/W			•				5044-B-4-503-XX
				3000 K	1600 lm	114 lm/W			•				5044-B-4-901-XX
				4000 K	1670 lm	119 lm/W			•				5044-B-4-904-XX
				2700 K	1520 lm	108 lm/W				•			5044-B-5-503-XX
		14 W	26°	3000 K	1600 lm	114 lm/W				•			5044-B-5-901-XX
				4000 K	1670 lm	119 lm/W				•			5044-B-5-904-XX
				2700 K	1450 lm	103 lm/W	•						5044-D-3-503-XX
				3000 K	1530 lm	109 lm/W	•						5044-D-3-901-XX
				4000 K	1600 lm	114 lm/W	•						5044-D-3-904-XX
		14 W	48°	2700 K	1450 lm	103 lm/W			•				5044-D-4-503-XX
				3000 K	1530 lm	109 lm/W			•				5044-D-4-901-XX
				4000 K	1600 lm	114 lm/W			•				5044-D-4-904-XX
				2700 K	1450 lm	103 lm/W				•			5044-D-5-503-XX
				3000 K	1530 lm	109 lm/W				•			5044-D-5-901-XX
		15 W	13°	4000 K	1600 lm	114 lm/W				•			5044-D-5-904-XX
				3000 K	1680 lm	112 lm/W	•						5044-5-3-901-XX
				2700 K	1590 lm	106 lm/W			•				5044-5-4-503-XX
				3000 K	1620 lm	108 lm/W	•						5044-6-3-901-XX
				3000 K	1620 lm	108 lm/W				•			5044-6-5-901-XX
		15 W	26°	2700 K	1500 lm	100 lm/W	•						5044-7-3-503-XX
				3000 K	1580 lm	105 lm/W	•						5044-7-3-901-XX
				2700 K	230 lm	15 lm/W	•						5044-Q-3-630-XX
				3000 K	230 lm	15 lm/W	•						5044-Q-3-644-XX
				4000 K	240 lm	16 lm/W	•						5044-Q-3-645-XX
		15 W	Sharp Elliptical V	2700 K	230 lm	15 lm/W			•				5044-Q-4-630-XX
				3000 K	230 lm	15 lm/W			•				5044-Q-4-644-XX
				4000 K	240 lm	16 lm/W			•				5044-Q-4-645-XX
				2700 K	230 lm	15 lm/W				•			5044-Q-5-630-XX
				3000 K	230 lm	15 lm/W				•			5044-Q-5-644-XX
		19 W	12°	4000 K	240 lm	16 lm/W				•			5044-Q-5-645-XX
				2700 K	230 lm	15 lm/W							
				3000 K	230 lm	15 lm/W							
				4000 K	240 lm	16 lm/W							
				2700 K	230 lm	15 lm/W							
Medium TUBE Up	<div>OD-5045</div> <div></div>	19 W	12°	3000 K	2210 lm	116 lm/W	•						5045-5-3-902-XX
			23°	4000 K	2230 lm	117 lm/W	•						5045-6-3-905-XX
		20 W	38°	3000 K	1120 lm	56 lm/W		•					5046-7-3-874-XX
				3000 K	3210 lm	118 lm/W	•						5046-5-3-887-XX
				4000 K	2700 lm	100 lm/W	•						5046-7-3-891-XX
				3000 K	2100 lm	70 lm/W		•					5046-5-3-877-XX
		30 W	12°	3000 K	4660 lm	116 lm/W	•						5046-5-3-902-XX
				3000 K	2100 lm	70 lm/W							
		27 W	14°	RGBW	950 lm	35 lm/W						•	5046-A-6-440-XX
				RGBW	920 lm	34 lm/W						•	5046-B-6-440-XX
				RGBW	880 lm	32 lm/W						•	5046-C-6-440-XX
				RGBW	930 lm	34 lm/W						•	5046-H-6-440-XX
Maxi TUBE Up	<div>OD-5046</div> <div></div> <div>RGBW</div>	27 W	15°/40°	RGBW	930 lm	34 lm/W						•	5046-N-6-440-XX
				RGBW	930 lm	34 lm/W							
				RGBW	930 lm	34 lm/W							
				RGBW	930 lm	34 lm/W							
		30 W	12°	3000 K	2100 lm	70 lm/W							
				3000 K	2100 lm	70 lm/W							
				3000 K	2100 lm	70 lm/W							
				3000 K	2100 lm	70 lm/W							
		40 W	12°	3000 K	4660 lm	116 lm/W	•						
				3000 K	4660 lm	116 lm/W	•						
				3000 K	4660 lm	116 lm/W	•						
				3000 K	4660 lm	116 lm/W	•						

Mini TUBE

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller						Ordering Code
										CASAMBI		
OD-7144 	11 W	Side throw	2700 K	740 lm	67 lm/W	•						7144-I-3-531-XX
			3000 K	740 lm	67 lm/W	•						7144-I-3-532-XX
			4000 K	790 lm	71 lm/W	•						7144-I-3-533-XX
	11 W	Forward throw	2700 K	700 lm	63 lm/W	•						7144-J-3-531-XX
			3000 K	700 lm	63 lm/W	•						7144-J-3-532-XX
			4000 K	740 lm	67 lm/W	•						7144-J-3-533-XX
	14 W	13°	2700 K	1580 lm	112 lm/W	•						7144-A-3-503-XX
			3000 K	1670 lm	119 lm/W	•						7144-A-3-901-XX
			4000 K	1750 lm	125 lm/W	•						7144-A-3-904-XX
	14 W	20°	2700 K	1520 lm	108 lm/W	•						7144-B-3-503-XX
			3000 K	1600 lm	114 lm/W	•						7144-B-3-901-XX
			4000 K	1670 lm	119 lm/W	•						7144-B-3-904-XX
	14 W	50°	2700 K	1450 lm	103 lm/W	•						7144-D-3-503-XX
			3000 K	1530 lm	109 lm/W	•						7144-D-3-901-XX
			4000 K	1600 lm	114 lm/W	•						7144-D-3-904-XX
	15 W	13°	2700 K	1590 lm	106 lm/W	•						7144-5-3-503-XX
			3000 K	1680 lm	112 lm/W	•						7144-5-3-901-XX
			4000 K	1760 lm	117 lm/W	•						7144-5-3-904-XX
	15 W	26°	2700 K	1540 lm	102 lm/W	•						7144-6-3-503-XX
			3000 K	1620 lm	108 lm/W	•						7144-6-3-901-XX
			4000 K	1700 lm	113 lm/W	•						7144-6-3-904-XX
	15 W	48°	2700 K	1500 lm	100 lm/W	•						7144-7-3-503-XX
			3000 K	1580 lm	105 lm/W	•						7144-7-3-901-XX
			4000 K	1660 lm	110 lm/W	•						7144-7-3-904-XX
	16 W	Side throw	2700 K	1060 lm	66 lm/W	•						7144-I-3-528-XX
			3000 K	1060 lm	66 lm/W	•						7144-I-3-529-XX
			4000 K	1130 lm	70 lm/W	•						7144-I-3-530-XX
			2700 K	1060 lm	66 lm/W			•				7144-I-4-528-XX
			3000 K	1060 lm	66 lm/W			•				7144-I-4-529-XX
			4000 K	1130 lm	70 lm/W			•				7144-I-4-530-XX
			2700 K	1060 lm	66 lm/W				•			7144-I-5-528-XX
			3000 K	1060 lm	66 lm/W				•			7144-I-5-529-XX
			4000 K	1130 lm	70 lm/W				•			7144-I-5-530-XX
			2700 K	1060 lm	66 lm/W					•		7144-I-A-528-XX
			3000 K	1060 lm	66 lm/W					•		7144-I-A-529-XX
			4000 K	1130 lm	70 lm/W					•		7144-I-A-530-XX
	16 W	Forward throw	2700 K	1000 lm	62 lm/W	•						7144-J-3-528-XX
			3000 K	1000 lm	62 lm/W	•						7144-J-3-529-XX
			4000 K	1070 lm	66 lm/W	•						7144-J-3-530-XX
			2700 K	1000 lm	62 lm/W			•				7144-J-4-528-XX
			3000 K	1000 lm	62 lm/W			•				7144-J-4-529-XX
			4000 K	1070 lm	66 lm/W			•				7144-J-4-530-XX
			2700 K	1000 lm	62 lm/W				•			7144-J-5-528-XX
			3000 K	1000 lm	62 lm/W				•			7144-J-5-529-XX
			4000 K	1070 lm	66 lm/W				•			7144-J-5-530-XX
			2700 K	1000 lm	62 lm/W					•		7144-J-A-528-XX
			3000 K	1000 lm	62 lm/W					•		7144-J-A-529-XX
			4000 K	1070 lm	66 lm/W					•		7144-J-A-530-XX
OD-7145 	22 W	Side throw	2700 K	1480 lm	67 lm/W	•						7145-I-3-531-XX
			3000 K	1480 lm	67 lm/W	•						7145-I-3-532-XX
			4000 K	1580 lm	71 lm/W	•						7145-I-3-533-XX
	22 W	Forward throw	2700 K	1400 lm	63 lm/W	•						7145-J-3-531-XX
			3000 K	1400 lm	63 lm/W	•						7145-J-3-532-XX
			4000 K	1480 lm	67 lm/W	•						7145-J-3-533-XX
	28 W	13°	2700 K	3180 lm	113 lm/W	•						7145-5-3-503-XX
			3000 K	3360 lm	120 lm/W	•						7145-5-3-901-XX
			4000 K	3520 lm	125 lm/W	•						7145-5-3-904-XX
			2700 K	3170 lm	113 lm/W	•						7145-A-3-503-XX
			3000 K	3340 lm	119 lm/W	•						7145-A-3-901-XX
			4000 K	3500 lm	125 lm/W	•						7145-A-3-904-XX
	28 W	20°	2700 K	3040 lm	108 lm/W	•						7145-B-3-503-XX
			3000 K	3200 lm	114 lm/W	•						7145-B-3-901-XX
			4000 K	3350 lm	119 lm/W	•						7145-B-3-904-XX
	28 W	26°	2700 K	3080 lm	110 lm/W	•						7145-6-3-503-XX
			3000 K	3240 lm	115 lm/W	•						7145-6-3-901-XX
			4000 K	3400 lm	121 lm/W	•						7145-6-3-904-XX
	28 W	48°	2700 K	3000 lm	107 lm/W	•						7145-7-3-503-XX
			3000 K	3160 lm	112 lm/W	•						7145-7-3-901-XX
			4000 K	3320 lm	118 lm/W	•						7145-7-3-904-XX
	28 W	50°	2700 K	2910 lm	103 lm/W	•						7145-D-3-503-XX
			3000 K	3060 lm	109 lm/W	•						7145-D-3-901-XX
			4000 K	3200 lm	114 lm/W	•						7145-D-3-904-XX
	32 W	Side throw	2700 K	2120 lm	66 lm/W	•						7145-I-3-528-XX
			3000 K	2120 lm	66 lm/W	•						7145-I-3-529-XX
			4000 K	2260 lm	70 lm/W	•						7145-I-3-530-XX
			2700 K	2120 lm	66 lm/W			•				7145-I-4-528-XX
			3000 K	2120 lm	66 lm/W			•				7145-I-4-529-XX
			4000 K	2260 lm	70 lm/W			•				7145-I-4-530-XX
			2700 K	2120 lm	66 lm/W				•			7145-I-5-528-XX
			3000 K	2120 lm	66 lm/W				•			7145-I-5-529-XX
			4000 K	2260 lm	70 lm/W				•			7145-I-5-530-XX

Mini TUBE DS

TUBE

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller						Ordering Code
											CASAMBI		
Mini TUBE DS	OD-7145 	32.0 W	Side throw	2700 K	2120 lm	66 lm/W					•		7145-I-A-528-XX
				3000 K	2120 lm	66 lm/W					•		7145-I-A-529-XX
				4000 K	2260 lm	70 lm/W					•		7145-I-A-530-XX
		32.0 W	Forward throw	2700 K	2000 lm	62 lm/W	•						7145-J-3-528-XX
				3000 K	2000 lm	62 lm/W	•						7145-J-3-529-XX
				4000 K	2140 lm	66 lm/W	•						7145-J-3-530-XX
				2700 K	2000 lm	62 lm/W			•				7145-J-4-528-XX
				3000 K	2000 lm	62 lm/W			•				7145-J-4-529-XX
				4000 K	2140 lm	66 lm/W			•				7145-J-4-530-XX
				2700 K	2000 lm	62 lm/W				•			7145-J-5-528-XX
				3000 K	2000 lm	62 lm/W				•			7145-J-5-529-XX
				4000 K	2140 lm	66 lm/W				•			7145-J-5-530-XX
				2700 K	2000 lm	62 lm/W					•		7145-J-A-528-XX
				3000 K	2000 lm	62 lm/W					•		7145-J-A-529-XX
				4000 K	2140 lm	66 lm/W					•		7145-J-A-530-XX
Mini TUBE	OD-7312 	10 W	Sharp Elliptical V	2700 K	200 lm	20 lm/W	•						7312-Q-3-646-XX
				3000 K	200 lm	20 lm/W	•						7312-Q-3-647-XX
				4000 K	210 lm	21 lm/W	•						7312-Q-3-648-XX
				2700 K	200 lm	20 lm/W			•				7312-Q-4-646-XX
				3000 K	200 lm	20 lm/W			•				7312-Q-4-647-XX
				4000 K	210 lm	21 lm/W			•				7312-Q-4-648-XX
		14 W	13°	2700 K	200 lm	20 lm/W				•			7312-Q-5-646-XX
				3000 K	200 lm	20 lm/W				•			7312-Q-5-647-XX
				4000 K	210 lm	21 lm/W				•			7312-Q-5-648-XX
				2700 K	1560 lm	111 lm/W	•						7312-A-3-503-XX
				3000 K	1640 lm	117 lm/W	•						7312-A-3-901-XX
				4000 K	1710 lm	122 lm/W	•						7312-A-3-904-XX
				2700 K	1560 lm	111 lm/W			•				7312-A-4-503-XX
				3000 K	1640 lm	117 lm/W			•				7312-A-4-901-XX
				4000 K	1710 lm	122 lm/W			•				7312-A-4-904-XX
		14 W	20°	2700 K	1560 lm	111 lm/W				•			7312-A-5-503-XX
				3000 K	1640 lm	117 lm/W				•			7312-A-5-901-XX
				4000 K	1710 lm	122 lm/W				•			7312-A-5-904-XX
				2700 K	1500 lm	107 lm/W	•						7312-B-3-503-XX
				3000 K	1580 lm	112 lm/W	•						7312-B-3-901-XX
				4000 K	1650 lm	117 lm/W	•						7312-B-3-904-XX
				2700 K	1500 lm	107 lm/W			•				7312-B-4-503-XX
				3000 K	1580 lm	112 lm/W			•				7312-B-4-901-XX
				4000 K	1650 lm	117 lm/W			•				7312-B-4-904-XX
		14 W	50°	2700 K	1500 lm	107 lm/W				•			7312-B-5-503-XX
				3000 K	1580 lm	112 lm/W				•			7312-B-5-901-XX
				4000 K	1650 lm	117 lm/W				•			7312-B-5-904-XX
				2700 K	1430 lm	102 lm/W	•						7312-D-3-503-XX
				3000 K	1510 lm	107 lm/W	•						7312-D-3-901-XX
				4000 K	1580 lm	112 lm/W	•						7312-D-3-904-XX
				2700 K	1430 lm	102 lm/W			•				7312-D-4-503-XX
				3000 K	1510 lm	107 lm/W			•				7312-D-4-901-XX
				4000 K	1580 lm	112 lm/W			•				7312-D-4-904-XX
		15 W	13°	2700 K	1430 lm	102 lm/W				•			7312-D-5-503-XX
				3000 K	1510 lm	107 lm/W				•			7312-D-5-901-XX
				4000 K	1580 lm	112 lm/W				•			7312-D-5-904-XX
		15 W	26°	2700 K	1430 lm	102 lm/W				•			7312-D-5-503-XX
				3000 K	1510 lm	107 lm/W				•			7312-D-5-901-XX
				4000 K	1580 lm	112 lm/W				•			7312-D-5-904-XX
		15 W	48°	2700 K	1430 lm	102 lm/W				•			7312-D-5-503-XX
				3000 K	1510 lm	107 lm/W				•			7312-D-5-901-XX
				4000 K	1580 lm	112 lm/W				•			7312-D-5-904-XX
		15 W	Sharp Elliptical V	2700 K	1590 lm	106 lm/W	•						7312-5-3-503-XX
				3000 K	1680 lm	112 lm/W	•						7312-5-3-901-XX
				2700 K	1590 lm	106 lm/W				•			7312-5-5-503-XX
				3000 K	1680 lm	112 lm/W				•			7312-5-5-901-XX
				2700 K	1540 lm	102 lm/W	•						7312-6-3-503-XX
				3000 K	1620 lm	108 lm/W	•						7312-6-3-901-XX
				4000 K	1700 lm	113 lm/W	•						7312-6-3-904-XX
				2700 K	1540 lm	102 lm/W			•				7312-6-4-503-XX
				3000 K	1620 lm	108 lm/W				•			7312-6-5-901-XX
		15 W	48°	2700 K	1500 lm	100 lm/W	•						7312-7-3-503-XX
				3000 K	1580 lm	105 lm/W	•						7312-7-3-901-XX
				4000 K	1660 lm	110 lm/W	•						7312-7-3-904-XX
				3000 K	1580 lm	105 lm/W			•				7312-7-4-901-XX
				4000 K	1660 lm	110 lm/W			•				7312-7-4-904-XX
				3000 K	1580 lm	105 lm/W				•			7312-7-5-901-XX
				4000 K	1660 lm	110 lm/W				•			7312-7-5-904-XX
				2700 K	290 lm	19 lm/W	•						7312-Q-3-630-XX
				3000 K	290 lm	19 lm/W	•						7312-Q-3-644-XX
				4000 K	300 lm	20 lm/W	•						7312-Q-3-645-XX
		15 W	Sharp Elliptical V	2700 K	290 lm	19 lm/W			•				7312-Q-4-630-XX
				3000 K	290 lm	19 lm/W			•				7312-Q-4-644-XX
				4000 K	300 lm	20 lm/W			•				7312-Q-4-645-XX
				2700 K	290 lm	19 lm/W				•			7312-Q-5-630-XX
				3000 K	290 lm	19 lm/W				•			7312-Q-5-644-XX
				4000 K	300 lm	20 lm/W				•			7312-Q-5-645-XX

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller						Ordering Code
							⏻	⏻ LED	Ⓢ	Ⓢ DALI	CASAMBI	DMX	
Medium TUBE	OD-7350 	20 W	12°	4000 K	2260 lm	113 lm/W	•						7350-5-3-905-XX
			16°	4000 K	1350 lm	67 lm/W		•					7350-6-3-874-XX
			23°	3000 K	2180 lm	109 lm/W	•						7350-6-3-902-XX
			24°	3000 K	1760 lm	88 lm/W	•						7350-8-3-535-XX
			44°	3000 K	1630 lm	81 lm/W	•						7350-D-3-535-XX
			48°	3000 K	1910 lm	95 lm/W	•						7350-7-3-902-XX
				4000 K	1950 lm	97 lm/W	•						7350-7-3-905-XX
				3000 K	1910 lm	95 lm/W			•				7350-7-4-902-XX
				3000 K	1910 lm	95 lm/W				•			7350-7-5-902-XX
				4000 K	1950 lm	97 lm/W				•			7350-7-5-905-XX
			Asymmetric	3000 K	1970 lm	98 lm/W	•						7350-9-3-902-XX
			44°/16°	3000 K	1730 lm	86 lm/W			•				7350-H-4-535-XX
Maxi TUBE	OD-7304 	20 W	10°	3000 K	1220 lm	61 lm/W		•					7304-5-3-873-XX
			16°	3000 K	1090 lm	54 lm/W		•					7304-6-3-873-XX
			38°	4000 K	1120 lm	56 lm/W		•					7304-7-3-874-XX
		27 W	12°	3000 K	3210 lm	118 lm/W				•			7304-5-5-887-XX
			23°	3000 K	3110 lm	115 lm/W	•						7304-6-3-887-XX
			48°	3000 K	2630 lm	97 lm/W	•						7304-7-3-887-XX
				4000 K	2700 lm	100 lm/W	•						7304-7-3-891-XX
				3000 K	2630 lm	97 lm/W				•			7304-7-5-887-XX
			Asymmetric	3000 K	2530 lm	93 lm/W	•						7304-9-3-887-XX
		30 W	22°	4000 K	2000 lm	66 lm/W		•					7304-6-3-878-XX
			47°	3000 K	1900 lm	63 lm/W		•					7304-7-3-877-XX
		40 W	12°	3000 K	4660 lm	116 lm/W	•						7304-5-3-902-XX
				4000 K	4790 lm	119 lm/W	•						7304-5-3-905-XX
			23°	3000 K	4510 lm	112 lm/W	•						7304-6-3-902-XX
			48°	3000 K	3810 lm	95 lm/W	•						7304-7-3-902-XX
				4000 K	3920 lm	98 lm/W	•						7304-7-3-905-XX
			Asymmetric	4000 K	3660 lm	91 lm/W	•						7304-9-3-905-XX



CORE

- WALL SURFACE MOUNT
- CEILING RECESSED
- CEILING MOUNT
- BOLLARD



Characterized by clean and clear-cut lines **CORE** is a family of square wall light, ceiling light, bollard and pole lights. **CORE** is available in two sizes and equipped with COB LED / High Power LED in three color temperatures with exceptional color consistency. The computer-aided-design of the parabolic reflector provides efficient light emission and distribution.

The housing is dust and water protected through the extensive engineering design and testing. **CORE** is recommended to illuminate columns, facades, walkways and various architectural design works. The pole lights give a great level of downward light with symmetric, asymmetric or side throw light distributions.



www.unilamp.co.th/en/p/core



Infortar Office Building, Tallinn - ESTONIA



Specification


- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum and extruded aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Weather proof TPE grommet.
- Installation must be carried out according to the enclosed product manual.

Available Color



****Custom colors are available on request.**

CORE

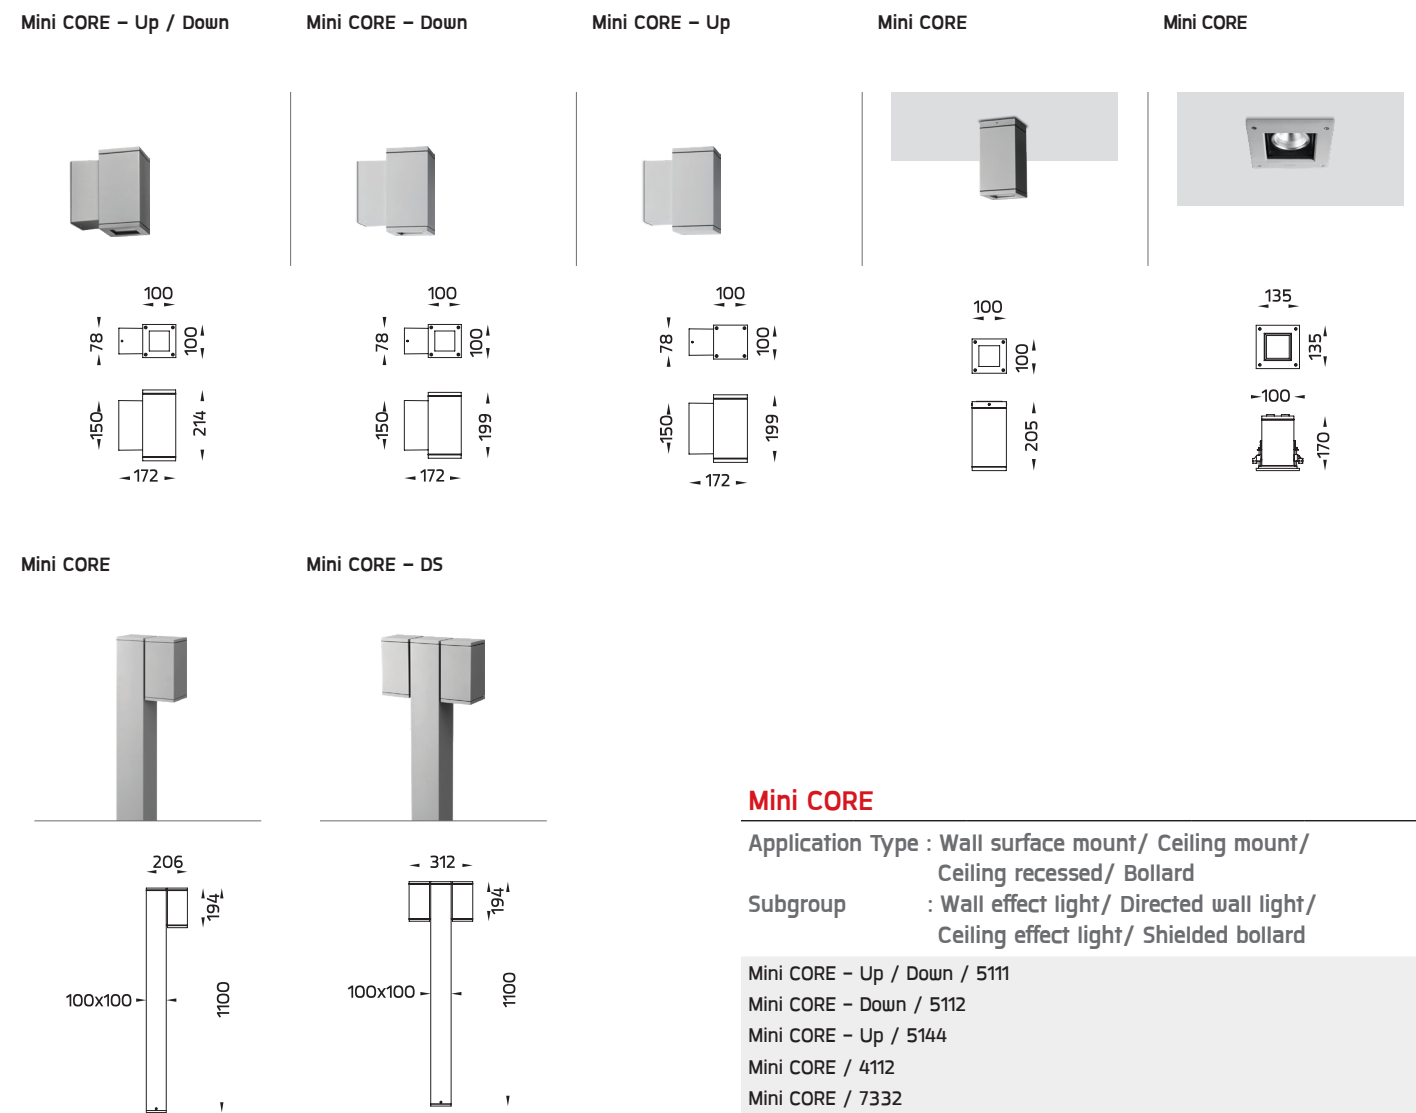

Mini CORE

Application Type : Wall surface mount/ Ceiling mount/
Ceiling recessed/ Bollard

Subgroup : Wall effect light/ Directed wall light/
Ceiling effect light/ Shielded bollard

Mini CORE – Up / Down / 5111

Mini CORE – Down / 5112

Mini CORE – Up / 5144

Mini CORE / 4112

Mini CORE / 7332

Mini CORE / 7146

Mini CORE – DS / 7147

Luminaire Performance

160 – 3160 lm

10 – 32 W

15 – 124 lm/W

Beam Options

Narrow Medium Wide Sharp Elliptical V Forward Throw Side Throw

Color Temperature

2700K/ 3000K/ 4000K

Controller

On–Off/ 1–10V/ DALI/ CASAMBI

Input Options

220–240Vac 50/60Hz



Fashion Island, Bangkok – THAILAND








Maxi CORE – Up / Down

Maxi CORE – Down

Maxi CORE – Up

Maxi Core

Maxi CORE

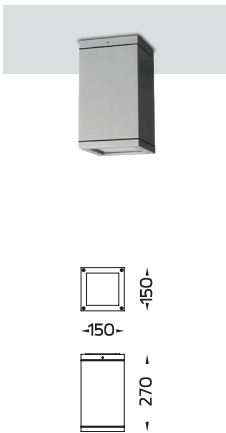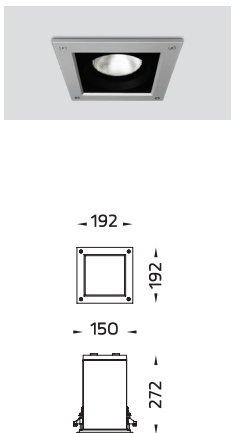

Mini CORE

Application Type : Wall surface mount/ Ceiling mount/
Ceiling recessed
Subgroup : Directed wall light/

Maxi CORE – Up / Down / 5101
Maxi CORE – Down / 5102
Maxi CORE – Up / 5145
Maxi Core / 4102
Maxi CORE / 7322

Luminaire Performance

1330 – 9400 lm
20 – 72 W
63 – 130 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K



Controller

On-Off/ 1-10V/ DALI
On-Off [AC LED]

Input Options

220–240Vac 50/60Hz

Accessories

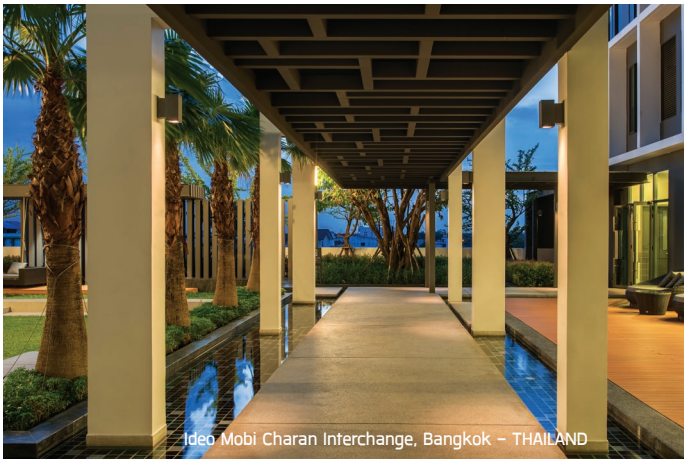

Ideo Mobi Charan Interchange, Bangkok – THAILAND

CORE

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller					Ordering Code
											CASAMBI	
Mini CORE Up / Down	<div>OD-5111</div> <div></div>	19 W	Sharp Elliptical V	2700 K	320 lm	16 lm/W	•					5111-Q-3-646-XX
				3000 K	320 lm	16 lm/W	•					5111-Q-3-647-XX
				4000 K	340 lm	17 lm/W	•					5111-Q-3-648-XX
				2700 K	320 lm	16 lm/W			•			5111-Q-4-646-XX
				3000 K	320 lm	16 lm/W			•			5111-Q-4-647-XX
				4000 K	340 lm	17 lm/W			•			5111-Q-4-648-XX
				2700 K	320 lm	16 lm/W				•		5111-Q-5-646-XX
				3000 K	320 lm	16 lm/W				•		5111-Q-5-647-XX
				4000 K	340 lm	17 lm/W				•		5111-Q-5-648-XX
				2700 K	2720 lm	100 lm/W	•					5111-A-3-503-XX
				3000 K	2860 lm	105 lm/W	•					5111-A-3-901-XX
				4000 K	2990 lm	110 lm/W	•					5111-A-3-904-XX
		27 W	13°	2700 K	2720 lm	100 lm/W			•			5111-A-4-503-XX
				3000 K	2860 lm	105 lm/W			•			5111-A-4-901-XX
				4000 K	2990 lm	110 lm/W			•			5111-A-4-904-XX
				2700 K	2720 lm	100 lm/W				•		5111-A-5-503-XX
				3000 K	2860 lm	105 lm/W				•		5111-A-5-901-XX
				4000 K	2990 lm	110 lm/W				•		5111-A-5-904-XX
			20°	2700 K	2640 lm	97 lm/W	•					5111-B-3-503-XX
				3000 K	2780 lm	102 lm/W	•					5111-B-3-901-XX
				4000 K	2910 lm	107 lm/W	•					5111-B-3-904-XX
				2700 K	2640 lm	97 lm/W			•			5111-B-4-503-XX
				3000 K	2780 lm	102 lm/W			•			5111-B-4-901-XX
				4000 K	2910 lm	107 lm/W			•			5111-B-4-904-XX
				2700 K	2640 lm	97 lm/W				•		5111-B-5-503-XX
				3000 K	2780 lm	102 lm/W				•		5111-B-5-901-XX
				4000 K	2910 lm	107 lm/W				•		5111-B-5-904-XX
			50°	2700 K	2430 lm	90 lm/W	•					5111-D-3-503-XX
				3000 K	2560 lm	94 lm/W	•					5111-D-3-901-XX
				4000 K	2680 lm	99 lm/W	•					5111-D-3-904-XX
				2700 K	2430 lm	90 lm/W			•			5111-D-4-503-XX
				3000 K	2560 lm	94 lm/W			•			5111-D-4-901-XX
				4000 K	2680 lm	99 lm/W			•			5111-D-4-904-XX
				2700 K	2430 lm	90 lm/W				•		5111-D-5-503-XX
				3000 K	2560 lm	94 lm/W				•		5111-D-5-901-XX
				4000 K	2680 lm	99 lm/W				•		5111-D-5-904-XX
		28 W	Sharp Elliptical V	2700 K	460 lm	16 lm/W	•					5111-Q-3-630-XX
				3000 K	460 lm	16 lm/W	•					5111-Q-3-644-XX
				4000 K	490 lm	17 lm/W	•					5111-Q-3-645-XX
				2700 K	460 lm	16 lm/W			•			5111-Q-4-630-XX
				3000 K	460 lm	16 lm/W			•			5111-Q-4-644-XX
				4000 K	490 lm	17 lm/W			•			5111-Q-4-645-XX
				2700 K	460 lm	16 lm/W				•		5111-Q-5-630-XX
				3000 K	460 lm	16 lm/W				•		5111-Q-5-644-XX
				4000 K	490 lm	17 lm/W				•		5111-Q-5-645-XX
		29 W	13°	3000 K	3000 lm	103 lm/W	•					5111-5-3-901-XX
				4000 K	3160 lm	108 lm/W	•					5111-5-3-904-XX
				3000 K	3000 lm	103 lm/W			•			5111-5-4-901-XX
		29 W	26°	3000 K	2980 lm	102 lm/W	•					5111-6-3-901-XX
				4000 K	3120 lm	107 lm/W	•					5111-6-3-904-XX
				3000 K	2980 lm	102 lm/W			•			5111-6-4-901-XX
		29 W	42°	3000 K	2680 lm	92 lm/W	•					5111-7-3-901-XX
				4000 K	2820 lm	97 lm/W	•					5111-7-3-904-XX
Mini CORE Down	<div>OD-5112</div> <div></div>	10 W	Sharp Elliptical V	2700 K	160 lm	16 lm/W	•					5112-Q-3-646-XX
				3000 K	160 lm	16 lm/W	•					5112-Q-3-647-XX
				4000 K	170 lm	17 lm/W	•					5112-Q-3-648-XX
				2700 K	160 lm	16 lm/W			•			5112-Q-4-646-XX
				3000 K	160 lm	16 lm/W			•			5112-Q-4-647-XX
				4000 K	170 lm	17 lm/W			•			5112-Q-4-648-XX
				2700 K	160 lm	16 lm/W				•		5112-Q-5-646-XX
				3000 K	160 lm	16 lm/W				•		5112-Q-5-647-XX
				4000 K	170 lm	17 lm/W				•		5112-Q-5-648-XX
		14 W	13°	2700 K	1340 lm	95 lm/W	•					5112-A-3-503-XX
				3000 K	1410 lm	100 lm/W	•					5112-A-3-901-XX
				4000 K	1470 lm	105 lm/W	•					5112-A-3-904-XX
				2700 K	1340 lm	95 lm/W			•			5112-A-4-503-XX
				3000 K	1410 lm	100 lm/W			•			5112-A-4-901-XX
				4000 K	1470 lm	105 lm/W			•			5112-A-4-904-XX
				2700 K	1340 lm	95 lm/W				•		5112-A-5-503-XX
				3000 K	1410 lm	100 lm/W				•		5112-A-5-901-XX
				4000 K	1470 lm	105 lm/W				•		5112-A-5-904-XX
		14 W	20°	2700 K	1300 lm	92 lm/W	•					5112-B-3-503-XX
				3000 K	1370 lm	97 lm/W	•					5112-B-3-901-XX
				4000 K	1430 lm	102 lm/W	•					5112-B-3-904-XX
				2700 K	1300 lm	92 lm/W			•			5112-B-4-503-XX
				3000 K	1370 lm	97 lm/W			•			5112-B-4-901-XX
				4000 K	1430 lm	102 lm/W			•			5112-B-4-904-XX
				2700 K	1300 lm	92 lm/W				•		5112-B-5-503-XX
				3000 K	1370 lm	97 lm/W				•		5112-B-5-901-XX
				4000 K	1430 lm	102 lm/W				•		5112-B-5-904-XX

*Please contact sales team for special request.

Mini CORE
Down

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller					Ordering Code
OD-5112 	14 W	50°	2700 K	1260 lm	90 lm/W	•					5112-D-3-503-XX
			3000 K	1330 lm	95 lm/W	•					5112-D-3-901-XX
			4000 K	1390 lm	99 lm/W	•					5112-D-3-904-XX
			2700 K	1260 lm	90 lm/W			•			5112-D-4-503-XX
			3000 K	1330 lm	95 lm/W			•			5112-D-4-901-XX
			4000 K	1390 lm	99 lm/W			•			5112-D-4-904-XX
			2700 K	1260 lm	90 lm/W				•		5112-D-5-503-XX
			3000 K	1330 lm	95 lm/W				•		5112-D-5-901-XX
			4000 K	1390 lm	99 lm/W				•		5112-D-5-904-XX
			3000 K	1500 lm	100 lm/W	•					5112-5-3-901-XX
			4000 K	1580 lm	105 lm/W	•					5112-5-3-904-XX
			3000 K	1500 lm	100 lm/W				•		5112-5-5-901-XX
			4000 K	1580 lm	105 lm/W				•		5112-5-5-904-XX
	15 W	13°	3000 K	1490 lm	99 lm/W	•					5112-6-3-901-XX
			4000 K	1560 lm	104 lm/W	•					5112-6-3-904-XX
			3000 K	1340 lm	89 lm/W	•					5112-7-3-901-XX
	15 W	42°	4000 K	1410 lm	94 lm/W	•					5112-7-3-904-XX
			2700 K	230 lm	15 lm/W	•					5112-Q-3-630-XX
			3000 K	230 lm	15 lm/W	•					5112-Q-3-644-XX
			4000 K	240 lm	16 lm/W	•					5112-Q-3-645-XX
	15 W	Sharp Elliptical V	2700 K	230 lm	15 lm/W			•			5112-Q-4-630-XX
			3000 K	230 lm	15 lm/W			•			5112-Q-4-644-XX
			4000 K	240 lm	16 lm/W			•			5112-Q-4-645-XX
			2700 K	230 lm	15 lm/W				•		5112-Q-5-630-XX
			3000 K	230 lm	15 lm/W				•		5112-Q-5-644-XX
			4000 K	240 lm	16 lm/W				•		5112-Q-5-645-XX

Mini CORE
Up

OD-5144 	10 W	Sharp Elliptical V	2700 K	160 lm	16 lm/W	•					5144-Q-3-646-XX
			3000 K	160 lm	16 lm/W	•					5144-Q-3-647-XX
			4000 K	170 lm	17 lm/W	•					5144-Q-3-648-XX
			2700 K	160 lm	16 lm/W			•			5144-Q-4-646-XX
			3000 K	160 lm	16 lm/W			•			5144-Q-4-647-XX
			4000 K	170 lm	17 lm/W			•			5144-Q-4-648-XX
			2700 K	160 lm	16 lm/W				•		5144-Q-5-646-XX
			3000 K	160 lm	16 lm/W				•		5144-Q-5-647-XX
			4000 K	170 lm	17 lm/W				•		5144-Q-5-648-XX
	14 W	13°	2700 K	1340 lm	95 lm/W	•					5144-A-3-503-XX
			3000 K	1410 lm	100 lm/W	•					5144-A-3-901-XX
			4000 K	1470 lm	105 lm/W	•					5144-A-3-904-XX
			2700 K	1340 lm	95 lm/W			•			5144-A-4-503-XX
			3000 K	1410 lm	100 lm/W			•			5144-A-4-901-XX
			4000 K	1470 lm	105 lm/W			•			5144-A-4-904-XX
			2700 K	1340 lm	95 lm/W				•		5144-A-5-503-XX
			3000 K	1410 lm	100 lm/W				•		5144-A-5-901-XX
			4000 K	1470 lm	105 lm/W				•		5144-A-5-904-XX
	14 W	20°	2700 K	1300 lm	92 lm/W	•					5144-B-3-503-XX
			3000 K	1370 lm	97 lm/W	•					5144-B-3-901-XX
			4000 K	1430 lm	102 lm/W	•					5144-B-3-904-XX
			2700 K	1300 lm	92 lm/W			•			5144-B-4-503-XX
			3000 K	1370 lm	97 lm/W			•			5144-B-4-901-XX
			4000 K	1430 lm	102 lm/W			•			5144-B-4-904-XX
			2700 K	1300 lm	92 lm/W				•		5144-B-5-503-XX
			3000 K	1370 lm	97 lm/W				•		5144-B-5-901-XX
			4000 K	1430 lm	102 lm/W				•		5144-B-5-904-XX
	14 W	50°	2700 K	1260 lm	90 lm/W	•					5144-D-3-503-XX
			3000 K	1330 lm	95 lm/W	•					5144-D-3-901-XX
			4000 K	1390 lm	99 lm/W	•					5144-D-3-904-XX
			2700 K	1260 lm	90 lm/W			•			5144-D-4-503-XX
			3000 K	1330 lm	95 lm/W			•			5144-D-4-901-XX
			4000 K	1390 lm	99 lm/W			•			5144-D-4-904-XX
			2700 K	1260 lm	90 lm/W				•		5144-D-5-503-XX
			3000 K	1330 lm	95 lm/W				•		5144-D-5-901-XX
			4000 K	1390 lm	99 lm/W				•		5144-D-5-904-XX
	15 W	13°	3000 K	1500 lm	100 lm/W	•					5144-5-3-901-XX
			3000 K	1500 lm	100 lm/W				•		5144-5-5-901-XX
		26°	3000 K	1490 lm	99 lm/W	•					5144-6-3-901-XX
			3000 K	1340 lm	89 lm/W	•					5144-7-3-901-XX
	15 W	Sharp Elliptical V	2700 K	230 lm	15 lm/W	•					5144-Q-3-630-XX
			3000 K	230 lm	15 lm/W	•					5144-Q-3-644-XX
			4000 K	240 lm	16 lm/W	•					5144-Q-3-645-XX
			2700 K	230 lm	15 lm/W			•			5144-Q-4-630-XX
			3000 K	230 lm	15 lm/W			•			5144-Q-4-644-XX
			4000 K	240 lm	16 lm/W			•			5144-Q-4-645-XX
			2700 K	230 lm	15 lm/W				•		5144-Q-5-630-XX
			3000 K	230 lm	15 lm/W				•		5144-Q-5-644-XX
			4000 K	240 lm	16 lm/W				•		5144-Q-5-645-XX

CORE

Mini CORE

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller					Ordering Code
											
<div>OD-4112</div> 	10 W	Sharp Elliptical V	2700 K	200 lm	20 lm/W	•					4112-Q-3-646-XX
			3000 K	200 lm	20 lm/W	•					4112-Q-3-647-XX
			4000 K	210 lm	21 lm/W	•					4112-Q-3-648-XX
			2700 K	200 lm	20 lm/W			•			4112-Q-4-646-XX
			3000 K	200 lm	20 lm/W			•			4112-Q-4-647-XX
			4000 K	210 lm	21 lm/W			•			4112-Q-4-648-XX
			2700 K	200 lm	20 lm/W				•		4112-Q-5-646-XX
			3000 K	200 lm	20 lm/W				•		4112-Q-5-647-XX
			4000 K	210 lm	21 lm/W				•		4112-Q-5-648-XX
			4000 K	1470 lm	105 lm/W				•		4112-A-5-904-XX
			2700 K	1300 lm	92 lm/W	•					4112-B-3-503-XX
			3000 K	1370 lm	97 lm/W	•					4112-B-3-901-XX
	14 W	20°	4000 K	1430 lm	102 lm/W	•					4112-B-3-904-XX
			2700 K	1300 lm	92 lm/W			•			4112-B-4-503-XX
			3000 K	1370 lm	97 lm/W			•			4112-B-4-901-XX
			4000 K	1430 lm	102 lm/W			•			4112-B-4-904-XX
			2700 K	1300 lm	92 lm/W				•		4112-B-5-503-XX
			3000 K	1370 lm	97 lm/W				•		4112-B-5-901-XX
			4000 K	1430 lm	102 lm/W				•		4112-B-5-904-XX
			2700 K	1260 lm	90 lm/W	•					4112-D-3-503-XX
			3000 K	1330 lm	95 lm/W	•					4112-D-3-901-XX
			4000 K	1390 lm	99 lm/W	•					4112-D-3-904-XX
			2700 K	1260 lm	90 lm/W			•			4112-D-4-503-XX
			3000 K	1330 lm	95 lm/W			•			4112-D-4-901-XX
	14 W	50°	4000 K	1390 lm	99 lm/W			•			4112-D-4-904-XX
			2700 K	1260 lm	90 lm/W				•		4112-D-5-503-XX
			3000 K	1330 lm	95 lm/W				•		4112-D-5-901-XX
			4000 K	1390 lm	99 lm/W				•		4112-D-5-904-XX
			2700 K	1430 lm	95 lm/W	•			•		4112-5-5-503-XX
			3000 K	1500 lm	100 lm/W	•					4112-5-3-901-XX
			2700 K	1420 lm	94 lm/W	•					4112-6-3-503-XX
			3000 K	1490 lm	99 lm/W	•					4112-6-3-901-XX
			3000 K	1490 lm	99 lm/W				•		4112-6-5-901-XX
			2700 K	1280 lm	85 lm/W	•					4112-7-3-503-XX
			3000 K	1340 lm	89 lm/W	•					4112-7-3-901-XX
			4000 K	1410 lm	94 lm/W	•					4112-7-3-904-XX
	15 W	Sharp Elliptical V	2700 K	280 lm	18 lm/W	•					4112-Q-3-630-XX
			3000 K	280 lm	18 lm/W	•					4112-Q-3-644-XX
			4000 K	300 lm	20 lm/W	•					4112-Q-3-645-XX
			2700 K	280 lm	18 lm/W			•			4112-Q-4-630-XX
			3000 K	280 lm	18 lm/W			•			4112-Q-4-644-XX
			4000 K	300 lm	20 lm/W			•			4112-Q-4-645-XX
			2700 K	280 lm	18 lm/W				•		4112-Q-5-630-XX
			3000 K	280 lm	18 lm/W				•		4112-Q-5-644-XX
			4000 K	300 lm	20 lm/W				•		4112-Q-5-645-XX
<div>OD-7332</div> 	10 W	Sharp Elliptical V	2700 K	200 lm	20 lm/W	•					7332-Q-3-646-XX
			3000 K	200 lm	20 lm/W	•					7332-Q-3-647-XX
			4000 K	210 lm	21 lm/W	•					7332-Q-3-648-XX
			2700 K	200 lm	20 lm/W			•			7332-Q-4-646-XX
			3000 K	200 lm	20 lm/W			•			7332-Q-4-647-XX
			4000 K	210 lm	21 lm/W			•			7332-Q-4-648-XX
			2700 K	200 lm	20 lm/W				•		7332-Q-5-646-XX
			3000 K	200 lm	20 lm/W				•		7332-Q-5-647-XX
			4000 K	210 lm	21 lm/W				•		7332-Q-5-648-XX
	14 W	13°	2700 K	1570 lm	112 lm/W	•					7332-A-3-503-XX
			3000 K	1660 lm	118 lm/W	•					7332-A-3-901-XX
			4000 K	1740 lm	124 lm/W	•					7332-A-3-904-XX
			2700 K	1570 lm	112 lm/W			•			7332-A-4-503-XX
			3000 K	1660 lm	118 lm/W			•			7332-A-4-901-XX
			4000 K	1740 lm	124 lm/W			•			7332-A-4-904-XX
			2700 K	1570 lm	112 lm/W				•		7332-A-5-503-XX
			3000 K	1660 lm	118 lm/W				•		7332-A-5-901-XX
			4000 K	1740 lm	124 lm/W				•		7332-A-5-904-XX
			2700 K	1510 lm	107 lm/W	•					7332-B-3-503-XX
			3000 K	1590 lm	113 lm/W	•					7332-B-3-901-XX
			4000 K	1660 lm	118 lm/W	•					7332-B-3-904-XX
	14 W	20°	2700 K	1510 lm	107 lm/W			•			7332-B-4-503-XX
			3000 K	1590 lm	113 lm/W			•			7332-B-4-901-XX
			4000 K	1660 lm	118 lm/W			•			7332-B-4-904-XX
			2700 K	1510 lm	107 lm/W				•		7332-B-5-503-XX
			3000 K	1590 lm	113 lm/W				•		7332-B-5-901-XX
			4000 K	1660 lm	118 lm/W				•		7332-B-5-904-XX

Mini CORE

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller					Ordering Code
										CASAMBI	
OD-7332 	14 W	50°	2700 K	1430 lm	102 lm/W	•					7332-D-3-503-XX
			3000 K	1510 lm	107 lm/W	•					7332-D-3-901-XX
			4000 K	1580 lm	112 lm/W	•					7332-D-3-904-XX
			2700 K	1430 lm	102 lm/W			•			7332-D-4-503-XX
			3000 K	1510 lm	107 lm/W			•			7332-D-4-901-XX
			4000 K	1580 lm	112 lm/W			•			7332-D-4-904-XX
			2700 K	1430 lm	102 lm/W				•		7332-D-5-503-XX
			3000 K	1510 lm	107 lm/W				•		7332-D-5-901-XX
			4000 K	1580 lm	112 lm/W				•		7332-D-5-904-XX
	15 W	13°	3000 K	1500 lm	100 lm/W			•			7332-5-4-901-XX
		26°	3000 K	1490 lm	99 lm/W	•					7332-6-3-901-XX
		42°	3000 K	1340 lm	89 lm/W	•					7332-7-3-901-XX
	4000 K		1410 lm	94 lm/W	•					7332-7-3-904-XX	
	3000 K	1340 lm	89 lm/W			•				7332-7-4-901-XX	
	15 W	Sharp Elliptical V	2700 K	280 lm	18 lm/W	•					7332-Q-3-630-XX
			3000 K	280 lm	18 lm/W	•					7332-Q-3-644-XX
			4000 K	300 lm	20 lm/W	•					7332-Q-3-645-XX
			2700 K	280 lm	18 lm/W			•			7332-Q-4-630-XX
			3000 K	280 lm	18 lm/W			•			7332-Q-4-644-XX
			4000 K	300 lm	20 lm/W			•			7332-Q-4-645-XX
			2700 K	280 lm	18 lm/W				•		7332-Q-5-630-XX
			3000 K	280 lm	18 lm/W				•		7332-Q-5-644-XX
			4000 K	300 lm	20 lm/W				•		7332-Q-5-645-XX
OD-7146 	14 W	13°	2700 K	1340 lm	95 lm/W	•					7146-A-3-503-XX
			3000 K	1410 lm	100 lm/W	•					7146-A-3-901-XX
			4000 K	1470 lm	105 lm/W	•					7146-A-3-904-XX
		20°	2700 K	1300 lm	92 lm/W	•					7146-B-3-503-XX
			3000 K	1370 lm	97 lm/W	•					7146-B-3-901-XX
			4000 K	1430 lm	102 lm/W	•					7146-B-3-904-XX
		50°	2700 K	1260 lm	90 lm/W	•					7146-D-3-503-XX
			3000 K	1330 lm	95 lm/W	•					7146-D-3-901-XX
			4000 K	1390 lm	99 lm/W	•					7146-D-3-904-XX
	15 W	13°	3000 K	1500 lm	100 lm/W	•					7146-5-3-901-XX
		26°	3000 K	1490 lm	99 lm/W	•					7146-6-3-901-XX
		42°	3000 K	1340 lm	89 lm/W	•					7146-7-3-901-XX
	16 W	Forward throw	2700 K	920 lm	57 lm/W					•	7146-J-A-528-XX
			3000 K	920 lm	57 lm/W					•	7146-J-A-529-XX
			4000 K	980 lm	61 lm/W					•	7146-J-A-530-XX
		Side throw	2700 K	940 lm	58 lm/W					•	7146-I-A-528-XX
			3000 K	940 lm	58 lm/W					•	7146-I-A-529-XX
			4000 K	1000 lm	62 lm/W					•	7146-I-A-530-XX
OD-7147 	28 W	13°	2700 K	2680 lm	95 lm/W	•					7147-A-3-503-XX
			3000 K	2820 lm	100 lm/W	•					7147-A-3-901-XX
			4000 K	2950 lm	105 lm/W	•					7147-A-3-904-XX
		20°	2700 K	2600 lm	92 lm/W	•					7147-B-3-503-XX
			3000 K	2740 lm	97 lm/W	•					7147-B-3-901-XX
			4000 K	2870 lm	102 lm/W	•					7147-B-3-904-XX
		50°	2700 K	2530 lm	90 lm/W	•					7147-D-3-503-XX
			3000 K	2660 lm	95 lm/W	•					7147-D-3-901-XX
			4000 K	2780 lm	99 lm/W	•					7147-D-3-904-XX
	32 W	Forward throw	2700 K	1840 lm	57 lm/W					•	7147-J-A-528-XX
			3000 K	1840 lm	57 lm/W					•	7147-J-A-529-XX
			4000 K	1960 lm	61 lm/W					•	7147-J-A-530-XX
		Side throw	2700 K	1880 lm	58 lm/W					•	7147-I-A-528-XX
			3000 K	1880 lm	58 lm/W					•	7147-I-A-529-XX
			4000 K	2000 lm	62 lm/W					•	7147-I-A-530-XX
OD-5101 	40 W	10°	4000 K	3000 lm	75 lm/W		•				5101-5-3-874-XX
		16°	3000 K	2540 lm	63 lm/W		•				5101-6-3-873-XX
		38°	3000 K	2800 lm	70 lm/W		•				5101-7-3-873-XX
			4000 K	2940 lm	73 lm/W		•				5101-7-3-874-XX
		Asymmetric	3000 K	2700 lm	67 lm/W		•				5101-9-3-873-XX
			4000 K	2840 lm	71 lm/W		•				5101-9-3-874-XX
	60 W	47°	3000 K	4680 lm	78 lm/W		•				5101-7-3-877-XX
			4000 K	4920 lm	82 lm/W		•				5101-7-3-878-XX
		Asymmetric	3000 K	4520 lm	75 lm/W		•				5101-9-3-877-XX
	72 W	12°	3000 K	9180 lm	127 lm/W	•					5101-5-3-902-XX
			4000 K	9400 lm	130 lm/W	•					5101-5-3-905-XX
			3000 K	9180 lm	127 lm/W			•			5101-5-4-902-XX
23°		4000 K	9180 lm	127 lm/W			•			5101-6-4-905-XX	
		4000 K	7880 lm	109 lm/W	•					5101-7-3-905-XX	
48°		4000 K	7880 lm	109 lm/W			•			5101-7-4-905-XX	
	4000 K	6540 lm	90 lm/W	•					5101-9-3-905-XX		

Mini CORE DS

Maxi CORE Up / Down

CORE

Maxi CORE
Down

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller					Ordering Code
											
OD-5102 	20 W	38°	3000 K	1400 lm	70 lm/W		•				5102-7-3-873-XX
		Asymmetric	3000 K	1350 lm	67 lm/W		•				5102-9-3-873-XX
	26 W	23°	3000 K	3220 lm	123 lm/W	•					5102-6-3-887-XX
		48°	3000 K	2760 lm	106 lm/W	•					5102-7-3-887-XX
		Asymmetric	3000 K	2400 lm	92 lm/W	•					5102-9-3-887-XX
			4000 K	2460 lm	94 lm/W	•					5102-9-3-891-XX
	30 W	Asymmetric	3000 K	2260 lm	75 lm/W		•				5102-9-3-877-XX
		12°	3000 K	4790 lm	119 lm/W				•		5102-5-5-902-XX
	40 W	23°	3000 K	4680 lm	117 lm/W	•					5102-6-3-902-XX
		48°	4000 K	4120 lm	103 lm/W	•					5102-7-3-905-XX
		Asymmetric	3000 K	3590 lm	89 lm/W	•					5102-9-3-902-XX
OD-5145 	20 W	38°	3000 K	1400 lm	70 lm/W		•				5145-7-3-873-XX
	26 W	48°	3000 K	2760 lm	106 lm/W	•					5145-7-3-887-XX
	40 W	12°	3000 K	4790 lm	119 lm/W				•		5145-5-5-902-XX
OD-4102 	20 W	16°	4000 K	1330 lm	66 lm/W		•				4102-6-3-874-XX
		38°	3000 K	1400 lm	70 lm/W		•				4102-7-3-873-XX
	26 W	12°	2700 K	2950 lm	113 lm/W				•		4102-5-5-506-XX
		23°	3000 K	2950 lm	113 lm/W	•					4102-6-3-887-XX
		48°	3000 K	2730 lm	105 lm/W	•					4102-7-3-887-XX
			4000 K	2800 lm	107 lm/W	•					4102-7-3-891-XX
	30 W	47°	3000 K	2340 lm	78 lm/W		•				4102-7-3-877-XX
			4000 K	2460 lm	82 lm/W		•				4102-7-3-878-XX
	40 W	23°	4000 K	4390 lm	109 lm/W	•					4102-6-3-905-XX
		48°	4000 K	4070 lm	101 lm/W	•					4102-7-3-905-XX
		Asymmetric	4000 K	3690 lm	92 lm/W	•					4102-9-3-905-XX
OD-7322 	20 W	10°	4000 K	1500 lm	75 lm/W		•				7322-5-3-874-XX
		38°	3000 K	1400 lm	70 lm/W		•				7322-7-3-873-XX
	26 W	48°	3000 K	2760 lm	106 lm/W	•					7322-7-3-887-XX
		Asymmetric	3000 K	2400 lm	92 lm/W	•					7322-9-3-887-XX
	30 W	47°	3000 K	2340 lm	78 lm/W		•				7322-7-3-877-XX
	40 W	23°	3000 K	4680 lm	117 lm/W	•					7322-6-3-902-XX
		48°	3000 K	4010 lm	100 lm/W	•					7322-7-3-902-XX
		Asymmetric	3000 K	3590 lm	89 lm/W	•					7322-9-3-902-XX



I-BRICK

■ WALL RECESSED

I-BRICK is a range of wall recessed luminaires with LED light sources. A good glare control allows it to be installed in most places where a comfortable illumination is needed. The low energy consumption LED module saves operating cost while providing exceptional lighting levels.

I-BRICK is available in five different styles in two sizes. The shallow housing can be installed in either wall or step where recess depth is limited. The high quality LED driver is integrated inside the luminaire for ease of installation. I-BRICK is commonly used to illuminate stairways, pathways and walls.



www.unilamp.co.th/en/p/i-brick

Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum housing.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Polycarbonate / Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- GFR PA6.6 terminal block.
- Weather proof TPE grommet.
- Installation must be carried out according to the enclosed product manual.

Available Color



****Custom colors are available on request.**


Varner HQ – Bridge by the waters, Billingstad – NORWAY




I-BRICK




I-BRICK




I-BRICK




I-BRICK H-Ramp



I-BRICK V-Ramp



I-BRICK V-Grill



I-BRICK

Application Type : Wall recessed

Subgroup : Directed wall recessed light/
General wall recessed light

I-BRICK/ 6000

I-BRICK/ 6001

I-BRICK H-Ramp/ 6061

I-BRICK V-Ramp/ 6063

I-BRICK V-Grill/ 6065

Luminaire Performance

40 - 180 lm

5.6 - 6.3 W

7 - 32 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

DALI/ On-Off

Input Voltage

220-240VAC 50/60HZ


Accessories




CV Driver




Long I-BRICK



Long I-BRICK/ Long I-BRICK – CVDA



Long I-BRICK H-Ramp



I-BRICK

Application Type : Wall recessed
Subgroup : Directed wall recessed light/
General wall recessed light

Long I-BRICK/ 6041
Long I-BRICK/ 6042
Long I-BRICK – CVDA/ 6042
Long I-BRICK H-Ramp/ 6062

Luminaire Performance

50 – 250 lm
5.9 – 7.9 W
6 – 42 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

On-Off / DALI/ On-Off

Input Voltage

24Vdc
220–240VAC 50/60HZ

Accessories




CV Driver

I-BRICK

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller			Ordering Code
										
I-BRICK	OD-6000 	5.6 W	N/A	3000 K 4000 K 2700 K	40 lm 40 lm 40 lm	7 lm/W 7 lm/W 7 lm/W	• • •		•	6000-0-3-935-XX 6000-0-3-938-XX 6000-0-3-526-XX 6000-0-5-526-XX
	OD-6001 	5.6 W	N/A	3000 K 4000 K	180 lm 170 lm	32 lm/W 30 lm/W	• •			6001-0-3-935-XX 6001-0-3-938-XX
	OD-6061 	5.6 W	N/A	3000 K 4000 K 2700 K	80 lm 70 lm 80 lm	14 lm/W 12 lm/W 14 lm/W	• • •			6061-0-3-935-XX 6061-0-3-938-XX 6061-0-3-526-XX
	OD-6063 	6.3 W	N/A	3000 K 4000 K 2700 K	60 lm 60 lm 60 lm	9 lm/W 9 lm/W 9 lm/W	• • •			6063-0-3-980-XX 6063-0-3-981-XX 6063-0-3-883-XX
	OD-6065 	5.6 W	N/A	3000 K 4000 K	50 lm 50 lm	8 lm/W 8 lm/W	• •			6065-0-3-935-XX 6065-0-3-938-XX
Long I-BRICK	OD-6041 	7.9 W	N/A	3000 K 4000 K	120 lm 110 lm	15 lm/W 13 lm/W	• •			6041-0-3-936-XX 6041-0-3-939-XX
	OD-6042 	5.9 W	N/A	3000 K	250 lm	42 lm/W		•		6042-0-7-684-XX
		7.9 W	N/A	3000 K 4000 K 2700 K	250 lm 220 lm 250 lm	31 lm/W 27 lm/W 31 lm/W	• • •			6042-0-3-936-XX 6042-0-3-939-XX 6042-0-3-527-XX
	OD-6062 	7.9 W	N/A	3000 K 4000 K 2700 K	100 lm 50 lm 100 lm	12 lm/W 6 lm/W 12 lm/W	• • •			6062-0-3-936-XX 6062-0-3-939-XX 6062-0-3-527-XX

*Please contact sales team for special request.

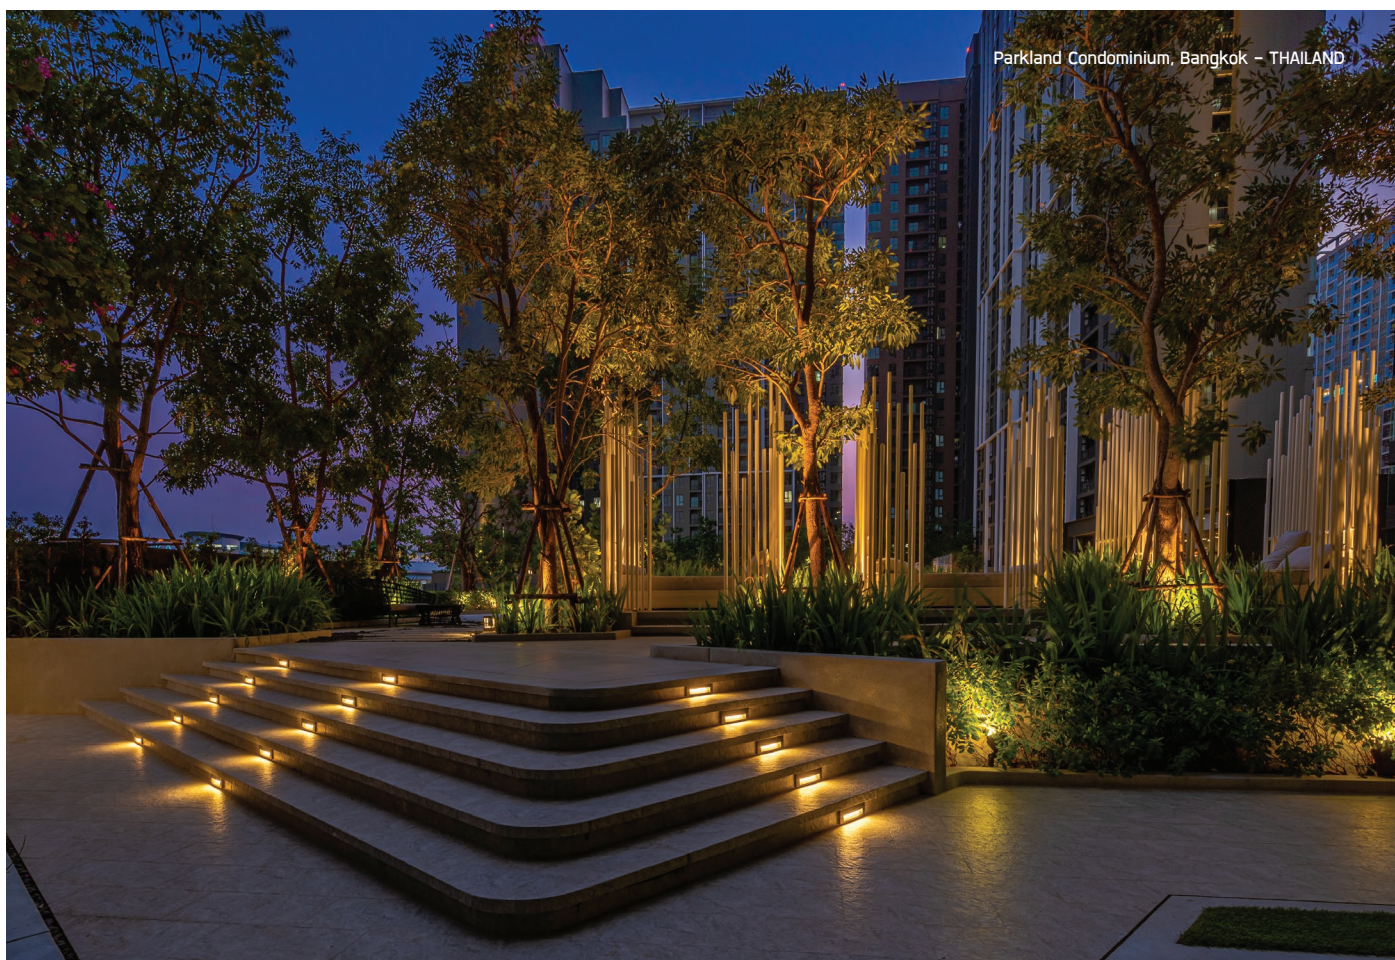



DOT family is a range of small recessed wall luminaires with LED light sources. Fitted with world renowned LED manufacturer DOT is highly efficient with low energy consumption. The glare-free cover enables them to be installed where comfortable illumination is required.

DOT is available in four different design in both square and round shapes. A very small and shallow housing allows the installation of the fixtures in wall or step that have limited recessing depth. DOT provides directional light for stairways and pathways where comfortable low level of light is preferred.




Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum body/ GFR polymer body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover/ Polycarbonate cover.
- Post-cured silicone gasket.
- High quality LED module.
- Available with integrated driver or remote driver.
- Weather proof grommet.
- Installation must be carried out according to the enclosed product manual.

Available Color




***Custom colors are available on request.*

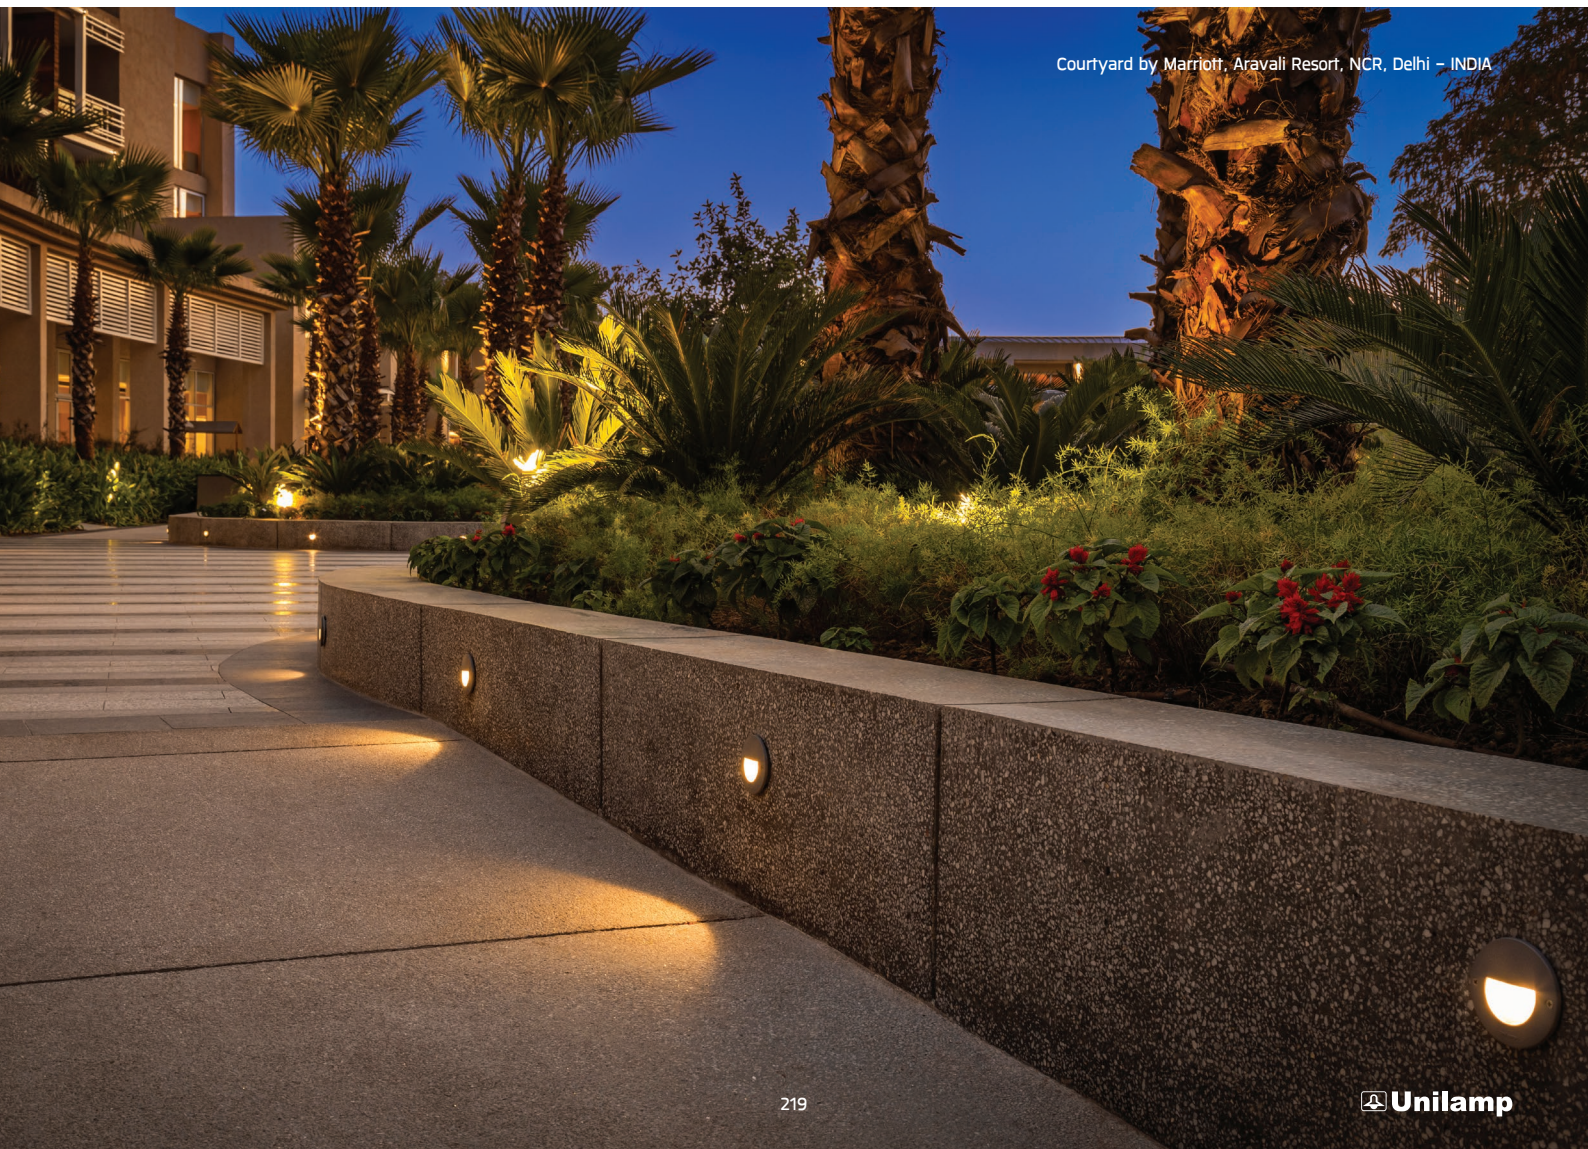

DOT




DOT Round – CC/
DOT Round




OD-6014

DOT Round Half – CC/
DOT Round Half



OD-6013

DOT Round Grill – CC/
DOT Round Grill




OD-6056

DOT Round Ramp – CC/
DOT Round Ramp




OD-6052




OD-6084

*Integrated driver




OD-6086

*Integrated driver



OD-6088

*Integrated driver



OD-6082

*Integrated driver

DOT Round

Application Type : Wall recessed

Subgroup : General wall recessed light/
Directed wall recessed light

DOT Round – CC / 6014
DOT Round / 6084
DOT Round Half – CC / 6013
DOT Round Half / 6086
DOT Round Grill – CC / 6056
DOT Round Grill / 6088
DOT Round Ramp – CC / 6052
DOT Round Ramp / 6082

Luminaire Performance

20 – 190 lm
2 – 2.6 W
10 – 90 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K/ Red/ Green/ Blue

Controller

On-Off/ Remote

Input Options

220–240Vac 50/60Hz
700mA, 2.98Vdc, Uin max 50Vdc

Accessories




CC Driver




Distribution box




DOT Square – CC/
DOT Square – CV/
DOT Square





DOT Square Half – CC/
DOT Square Half




DOT Square Grill – CC/
DOT Square Grill




DOT Square Ramp – CC/
DOT Square Ramp – CV/
DOT Square Ramp




*Integrated driver



*Integrated driver



*Integrated driver



*Integrated driver

DOT Square

Application Type : Wall recessed

Subgroup : General wall recessed light/
Directed wall recessed light

DOT Square – CC / CV / 6012

DOT Square / 6083

DOT Square Half – CC / 6053

DOT Square Half / 6085

DOT Square Grill – CC / 6055

DOT Square Grill / 6087

DOT Square Ramp – CC / CV / 6051

DOT Square Ramp / 6081

Luminaire Performance

5 – 80 lm

2 – 2.3 W

2 – 38 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K/ Red/ Blue

Controller

On-Off/ Remote

Input Options

220–240Vac 50/60Hz

700mA, 2.98Vdc, Uin max 50Vdc

24Vdc

Accessories



CC Driver



CV Driver




Distribution box

DOT

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller		Ordering Code
								REMOTE	
DOT Round CC	OD-6014								
		2.1 W	N/A	3000 K 4000 K	180 lm 190 lm	85 lm/W 90 lm/W		• •	6014-0-2-989-XX 6014-0-2-899-XX
		2.3 W	N/A	Blue	38 lm	16 lm/W		•	6014-0-2-992-XX
		2.6 W	N/A	Red	51 lm	19 lm/W		•	6014-0-2-994-XX
DOT Round	OD-6084								
		2 W	N/A	3000 K 4000 K Green Red	86 lm 93 lm 68 lm 30 lm	43 lm/W 46 lm/W 34 lm/W 15 lm/W	• • • •		6084-0-3-989-XX 6084-0-3-899-XX 6084-0-3-993-XX 6084-0-3-994-XX
	*integrated driver								
DOT Round Half – CC	OD-6013								
		2.1 W	N/A	2700 K 3000 K 4000 K	100 lm 100 lm 100 lm	47 lm/W 47 lm/W 47 lm/W		• • •	6013-0-2-525-XX 6013-0-2-989-XX 6013-0-2-899-XX
		2.3 W	N/A	Blue	23 lm	10 lm/W		•	6013-0-2-992-XX
DOT Round Half	OD-6086								
		2 W	N/A	3000 K 4000 K	40 lm 40 lm	20 lm/W 20 lm/W	• •		6086-0-3-989-XX 6086-0-3-899-XX
	*integrated driver								
DOT Round Grill – CC	OD-6056								
		2.1 W	N/A	3000 K 4000 K	41 lm 42 lm	19 lm/W 20 lm/W		• •	6056-0-2-989-XX 6056-0-2-899-XX
DOT Round Grill	OD-6088								
		2 W	N/A	3000 K 4000 K	20 lm 22 lm	10 lm/W 11 lm/W	• •		6088-0-3-989-XX 6088-0-3-899-XX
	*integrated driver								
DOT Round Ramp – CC	OD-6052								
		2.1 W	N/A	2700 K 3000 K 4000 K	43 lm 43 lm 44 lm	20 lm/W 20 lm/W 20 lm/W		• • •	6052-0-2-525-XX 6052-0-2-989-XX 6052-0-2-899-XX
DOT Round Ramp	OD-6082								
		2 W	N/A	2700 K 3000 K 4000 K	21 lm 21 lm 23 lm	10 lm/W 10 lm/W 11 lm/W	• • •		6082-0-3-525-XX 6082-0-3-989-XX 6082-0-3-899-XX
	*integrated driver								
DOT Square CC / CV	OD-6012								
		2.1 W	N/A	2700 K 3000 K 4000 K	80 lm 80 lm 80 lm	38 lm/W 38 lm/W 38 lm/W		• • •	6012-0-2-525-XX 6012-0-2-989-XX 6012-0-2-899-XX
		2.3 W	N/A	Blue	26 lm	11 lm/W		•	6012-0-2-992-XX
		2.1 W	N/A	3000 K	80 lm	38 lm/W		•	6012-0-2-382-XX
DOT Square	OD-6083								
		2 W	N/A	3000 K	60 lm	30 lm/W	•		6083-0-3-989-XX
	*integrated driver								
DOT Square Half – CC	OD-6053								
		2.1 W	N/A	3000 K	80 lm	38 lm/W		•	6053-0-2-989-XX
DOT Square Half	OD-6085								
		2.0 W	N/A	3000 K	40 lm	20 lm/W	•		6085-0-3-989-XX
	*integrated driver								

*Please contact sales team for special request.

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller		Ordering Code	
								REMOTE		
DOT Square Grill – CC	OD-6055		2.1 W	N/A	2700 K 3000 K	23 lm 23 lm	10 lm/W 10 lm/W		• •	6055-0-2-525-XX 6055-0-2-989-XX
DOT Square Grill	OD-6087		2 W	N/A	2700 K 3000 K Red	11 lm 11 lm 5 lm	5 lm/W 5 lm/W 2 lm/W	• • •		6087-0-3-525-XX 6087-0-3-989-XX 6087-0-3-994-XX
	*integrated driver									
DOT Square Ramp – CC/CV	OD-6051		2.1 W	N/A	2700 K 3000 K 4000 K	45 lm 45 lm 47 lm	21 lm/W 21 lm/W 22 lm/W		• • •	6051-0-2-525-XX 6051-0-2-989-XX 6051-0-2-899-XX
	2.1 W									
DOT Square Ramp	OD-6081		2 W	N/A	2700 K 3000 K 4000 K	22 lm 22 lm 24 lm	11 lm/W 11 lm/W 11 lm/W	• • •		6081-0-3-525-XX 6081-0-3-989-XX 6081-0-3-899-XX
	*integrated driver									

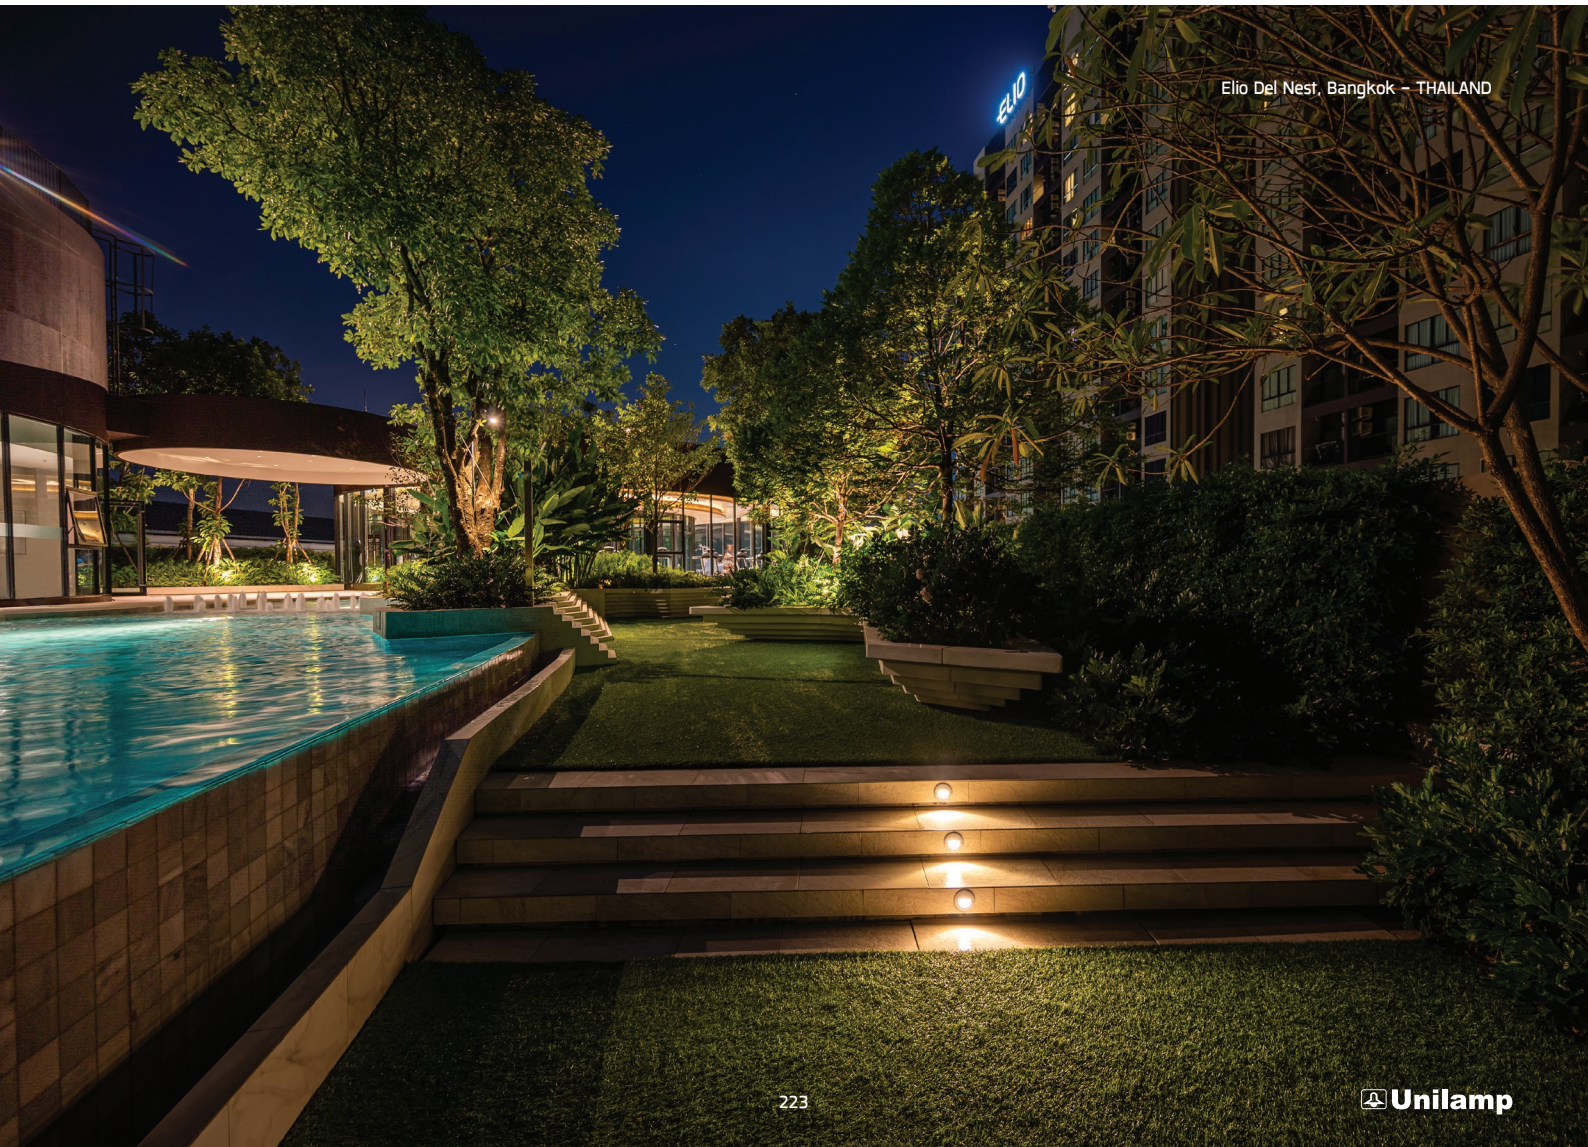

PLUTO

■ WALL RECESSED



Wall recessed fixtures **PLUTO** is available with LED light source in 3000K or 4000K with high CRI and exceptional color consistency. **PLUTO-Ramp** with its glare free downward light distribution is a perfect fitting for pathway or stair case illumination. **PLUTO-Flat** is assembled with a unique white ceramic-coated tempered glass and it illuminates not only the ground surface but also its surroundings. The slim-recessed housing enables it to be installed in thin wall applications.



www.unilamp.co.th/en/p/pluto

Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum housing.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- GFR PA6.6 terminal block.
- Weather proof TPE grommet.
- Installation must be carried out according to the enclosed product manual.

Available Color



****Custom colors are available on request.**

PLUTO

1. Body housing

Enhanced LM6 die-cast aluminium housing with 16-Step coating process including nano ceramic film. Low copper content <0.1%

2. Diffuser

Impact resistant safety tempered glass diffuser with micro-pattern arrays. Light spread evenly on the ground.

3. LED

Array of mid power LED from world renowned manufacturer. Module attached on to heat conductive material. 2700K, 3000K and 4000K CRI>80 3-Step SDCM.

4. Driver


High quality LED constant current driver. Complied with Safety and EMC regulations.




PLUTO



PLUTO
Ramp




PLUTO
Flat



PLUTO

Application Type : Wall recessed
Subgroup : Directed wall recessed light/
General wall recessed light

PLUTO Ramp/ 6015	
PLUTO Flat/ 6031	
Luminaire Performance	
600 – 1310 lm	
14 – 26 W	
42 – 55 lm/W	
Beam Options	
	
Color Temperature	
3000K/ 4000K	
Controller	
On-off/ DALI	
Input Voltage	
220–240VAC 50/60HZ	

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller		Ordering Code
									
PLUTO Ramp	OD-6015 	17 W	N/A	3000 K	890 lm	52 lm/W	•		6015-0-3-668-XX
				4000 K	940 lm	55 lm/W	•		6015-0-3-669-XX
		18 W	N/A	3000 K	870 lm	48 lm/W	•		6015-0-3-867-XX
				4000 K	930 lm	51 lm/W	•		6015-0-3-868-XX
			Side throw	3000 K	800 lm	44 lm/W	•		6015-I-3-867-XX
				4000 K	860 lm	47 lm/W	•		6015-I-3-868-XX
		26 W	N/A	3000 K	1220 lm	46 lm/W	•		6015-0-3-897-XX
				4000 K	1310 lm	50 lm/W	•		6015-0-3-898-XX
			Side throw	3000 K	1120 lm	43 lm/W	•		6015-I-3-897-XX
				4000 K	1200 lm	46 lm/W	•		6015-I-3-898-XX
			N/A	3000 K	1220 lm	46 lm/W		•	6015-0-5-897-XX
PLUTO Flat	OD-6031 	14 W	N/A	3000 K	600 lm	42 lm/W	•		6031-0-3-803-XX
				4000 K	600 lm	42 lm/W	•		6031-0-3-807-XX

*Please contact sales team for special request.



ZOUK

- WALL RECESSED
- WALL SURFACE MOUNT



ZOUK is delicately designed and engineered for slim profile surface mounted and wall recessed light, featured low glare with screw-less appearance. Manufactured from LM6 Aluminum the housing is built to last and be situated in the the harshest of climates. The coating of Nano Ceramic film and double layer of durable paint ensures longevity. Built with the mindset of light comfort and soft visualization. Light source is CRI > 80 with an offering of 2700K, 3000k and 4000k. Available in various designs to compliment both commercial and residential applications.



www.unilamp.co.th/en/p/zouk

Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum housing.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- GFR PA6.6 terminal block.
- Weather proof TPE grommet.
- Installation must be carried out according to the enclosed product manual.

Available Color



****Custom colors are available on request.**



1. Body Housing.

Enhanced LM6 die-cast aluminum housing with 16-step coating process including nano ceramic film. Low copper content <0.1%

2. Diffuser

Impact resistant safety tempered glass diffuser with etched surface . Light spread evenly on the ground.

3. LED

Array of mid power LED from world renowned manufacturer. Module attached directly to the body for fastest heat transfer. 2700K, 3000K and 4000K CRI>80 3-Step SDCM.

4. Driver

High quality LED constant current driver. Conform to applicable safety standards and electromagnetic compatibility.


5. Screw less

Clear and clean cut design. No visible screw from mounting point of view.


ZOUK




ZOUK1 / ZOUK1 – CVDA



ZOUK2 / ZOUK2 – CVDA



Mini ZOUK2



ZOUK

Application Type : Wall recessed
Subgroup : Directed wall recessed light

ZOUK1 / ZOUK1 – CVDA / 6067
ZOUK2 / ZOUK2 – CVDA / 6068
Mini ZOUK 2 / 6069

Luminaire Performance

210 – 710 lm
5.9 – 11 W
27 – 79 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

Integrated driver with On–Off control
24V Remote driver with On–Off/ DALI control [CVDA]

Input Options

24Vdc
220–240Vac 50/60Hz



Accessories



CV Driver



ZOUK1 / ZOUK1 – CVDA ZOUK2 / ZOUK2 – CVDA ZOUK3 / ZOUK3 – CVDA



ZOUK

Application Type : Wall surface mount
Subgroup : Directed wall light


ZOUK1 / ZOUK1 – CVDA / 7052
ZOUK2 / ZOUK2 – CVDA / 7053
ZOUK3 / ZOUK3 – CVDA / 7054
Luminaire Performance
240 – 440 lm
5.9 – 11 W
30 – 52 lm/W
Beam Options
Color Temperature
2700K/ 3000K/ 4000K
Controller
Integrated driver with On–Off control
24V Remote driver with On–Off/ DALI control [CVDA]
Input Options
24Vdc
220–240Vac 50/60Hz

Accessories

 CV Driver

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller		Ordering Code
								 	
ZOUK1/CVDA	OD-6067 	5.9 W	N/A	3000 K 4000 K	210 lm 220 lm	35 lm/W 37 lm/W		• •	6067-0-7-684-XX 6067-0-7-685-XX
		11 W	N/A	2700 K 3000 K 4000 K	300 lm 300 lm 320 lm	27 lm/W 27 lm/W 29 lm/W	• • •		6067-0-3-527-XX 6067-0-3-936-XX 6067-0-3-939-XX
ZOUK2/CVDA	OD-6068 	5.9 W	N/A	3000 K	470 lm	79 lm/W		•	6068-0-7-684-XX
		11 W	N/A	2700 K 3000 K 4000 K	660 lm 660 lm 710 lm	60 lm/W 60 lm/W 64 lm/W	• • •		6068-0-3-527-XX 6068-0-3-936-XX 6068-0-3-939-XX
Mini ZOUK2	OD-6069 	7 W	N/A	2700 K 3000 K 4000 K	240 lm 250 lm 220 lm	34 lm/W 35 lm/W 31 lm/W	• • •		6069-0-3-560-XX 6069-0-3-921-XX 6069-0-3-922-XX
ZOUK1/CVDA	OD-7052 	5.9 W	N/A	2700 K 3000 K 4000 K	270 lm 270 lm 290 lm	45 lm/W 45 lm/W 49 lm/W		• • •	7052-0-7-683-XX 7052-0-7-684-XX 7052-0-7-685-XX
		11 W	N/A	2700 K 3000 K 4000 K	380 lm 380 lm 330 lm	34 lm/W 34 lm/W 30 lm/W	• • •		7052-0-3-527-XX 7052-0-3-936-XX 7052-0-3-939-XX
ZOUK2/CVDA	OD-7053 	5.9 W	N/A	3000 K	240 lm	40 lm/W		•	7053-0-7-684-XX
		11 W	N/A	2700 K 3000 K 4000 K	340 lm 340 lm 340 lm	30 lm/W 30 lm/W 30 lm/W	• • •		7053-0-3-527-XX 7053-0-3-936-XX 7053-0-3-939-XX
ZOUK3/CVDA	OD-7054 	5.9 W	N/A	3000 K	310 lm	52 lm/W		•	7054-0-7-684-XX
		11 W	N/A	2700 K 3000 K 4000 K	440 lm 440 lm 400 lm	40 lm/W 40 lm/W 36 lm/W	• • •		7054-0-3-527-XX 7054-0-3-936-XX 7054-0-3-939-XX

*Please contact sales team for special request.

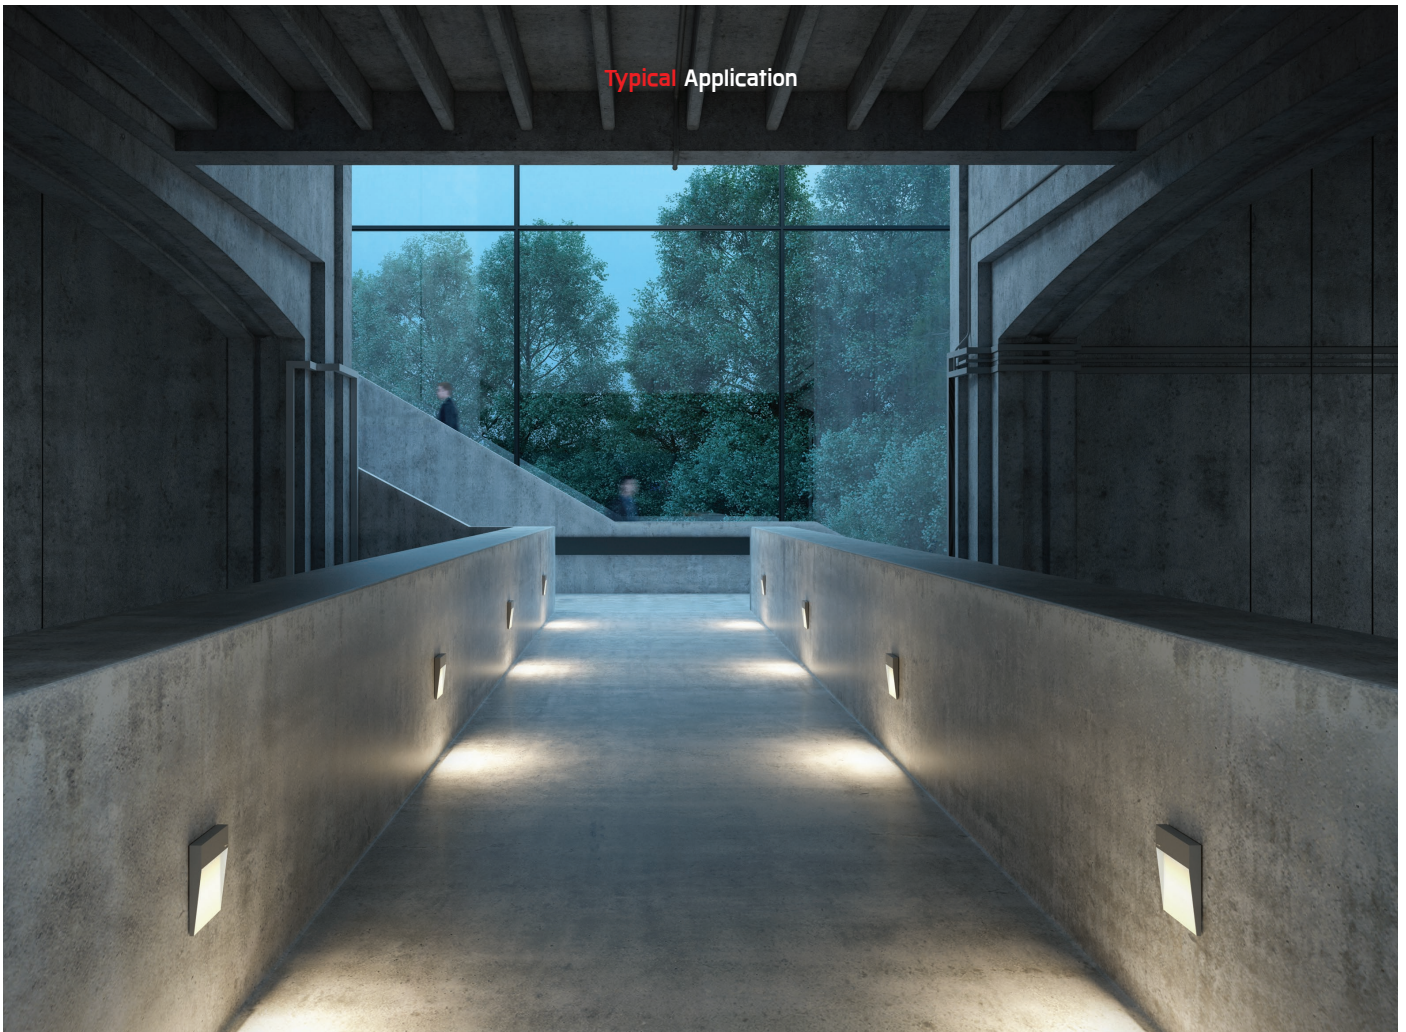

■ WALL SURFACE MOUNT



RETINA is a round wall/ceiling light with robust aluminum construction and impact resistant polycarbonate diffuser. The LED module is available with built-in microwave motion sensor and hi-low light function. The high protection rating of IP65 and IK09 allows **RETINA** to be installed in rough outdoor environments. With a diffused light distribution, it provides smooth and uniform illumination in private and public areas and is also suitable for commercial use. The front cover is available in various designs; moreover, **RETINA** is available in two sizes with the choice of six different colors. The LED module is easily replaceable for future upgrade.



Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Polycarbonate diffuser.
- Post-cured silicone gasket.
- High quality LED module and driver. Replaceable for future upgrade.
- Optional with motion detector [Microwave Sensor].
- Push-in connector for easy installation.
- Installation work has to be carried out according to the enclosed product manual.

Available Color



****Custom colors are available on request.**



RETINA



Mini RETINA




Mini Half RETINA




Mini Flat RETINA




Mini RETINA 5



Maxi RETINA

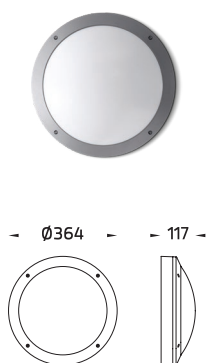

Maxi Half RETINA

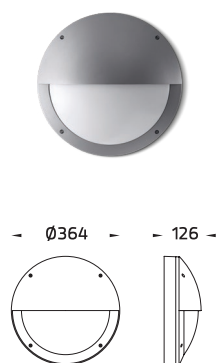

Maxi Flat RETINA



RETINA

Application Type : Wall surface mount
Subgroup : General wall light

Mini RETINA/ 7009
Mini Half RETINA/ 7015
Mini Flat RETINA/ 7072
Mini RETINA 5/ 7037
Maxi RETINA/ 7080
Maxi Half RETINA/ 7081
Maxi Flat RETINA/ 7073

Luminaire Performance

510 – 1870 lm
9 – 26 W
23 – 105 lm/W

Beam Options



Color Temperature

3000K/ 4000K

Controller

On-off/ On-Off with Microwave sensor/ DALI

Input Voltage

220–240VAC 50/60HZ

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller			Ordering Code
										
Mini RETINA		9 W	N/A	3000 K	940 lm	104 lm/W			•	7009-0-5-801-XX
		9 W	N/A	3000 K	940 lm	104 lm/W	•			7009-0-3-801-XX
				4000 K			•			7009-0-3-805-XX
		9 W	N/A	3000 K	940 lm	104 lm/W		•		7009-0-3-802-XX
Mini Half RETINA				4000 K				•		7009-0-3-806-XX
		9 W	N/A	3000 K	510 lm	56 lm/W			•	7015-0-5-801-XX
				4000 K				•		7015-0-5-805-XX
		9 W	N/A	3000 K	510 lm	56 lm/W	•			7015-0-3-801-XX
Mini Flat RETINA				4000 K			•			7015-0-3-805-XX
		9 W	N/A	3000 K	510 lm	56 lm/W	•			7015-0-3-802-XX
				4000 K				•		7015-0-3-806-XX
		9 W	N/A	3000 K	950 lm	105 lm/W			•	7072-0-5-801-XX
Mini RETINA 5				4000 K			•		•	7072-0-5-805-XX
		9 W	N/A	3000 K	950 lm	105 lm/W	•			7072-0-3-801-XX
				4000 K			•			7072-0-3-805-XX
		9 W	N/A	3000 K	950 lm	105 lm/W		•		7072-0-3-802-XX
Maxi RETINA										
		23 W	N/A	4000 K	1040 lm	45 lm/W			•	7080-0-5-824-XX
		25 W	N/A	3000 K	1100 lm	44 lm/W	•			7080-0-3-823-XX
				4000 K	1190 lm	47 lm/W	•			7080-0-3-824-XX
Maxi Half RETINA		26 W	N/A	3000 K	980 lm	37 lm/W		•		7080-0-3-809-XX
				4000 K	1070 lm	41 lm/W		•		7080-0-3-810-XX
		23 W	N/A	4000 K	540 lm	23 lm/W			•	7081-0-5-824-XX
		25 W	N/A	3000 K	590 lm	23 lm/W	•			7081-0-3-823-XX
Maxi Flat RETINA				4000 K	630 lm	25 lm/W	•			7081-0-3-824-XX
		26 W	N/A	4000 K	690 lm	26 lm/W		•		7081-0-3-810-XX
		23 W	N/A	3000 K	1630 lm	70 lm/W			•	7073-0-5-823-XX
		25 W	N/A	3000 K	1870 lm	74 lm/W	•			7073-0-3-823-XX
				4000 K			•			7073-0-3-824-XX

*Please contact sales team for special request.

■ WALL SURFACE MOUNT



Square in shape **DRIFT** wall and ceiling lights have a rugged aluminum structure and impact resistant polycarbonate diffuser. The LED module is available with built-in microwave motion sensor and hi-low light function. The color temperature is 3000K or 4000K with choice of Dali option. The high protection rating of IP65 and IK09 allows **DRIFT** to be installed in the harshest outdoor environments. With the diffused light distribution, it provides good low glare general lighting to private and public areas. The front cover is available in various designs; moreover, **DRIFT** is available with the choice of six different colors.



www.unilamp.co.th/en/p/drift

POLARIS RESIDENCE, BANGKOK - THAILAND



Specification


- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Polycarbonate diffuser.
- Post-cured silicone gasket.
- High quality LED module and driver. Replaceable for future upgrade.
- Optional with motion detector (Microwave Sensor).
- Push-in connector for easy installation.
- Installation work has to be carried out according to the enclosed product manual.

Available Color



****Custom colors are available on request.**

DRIFT

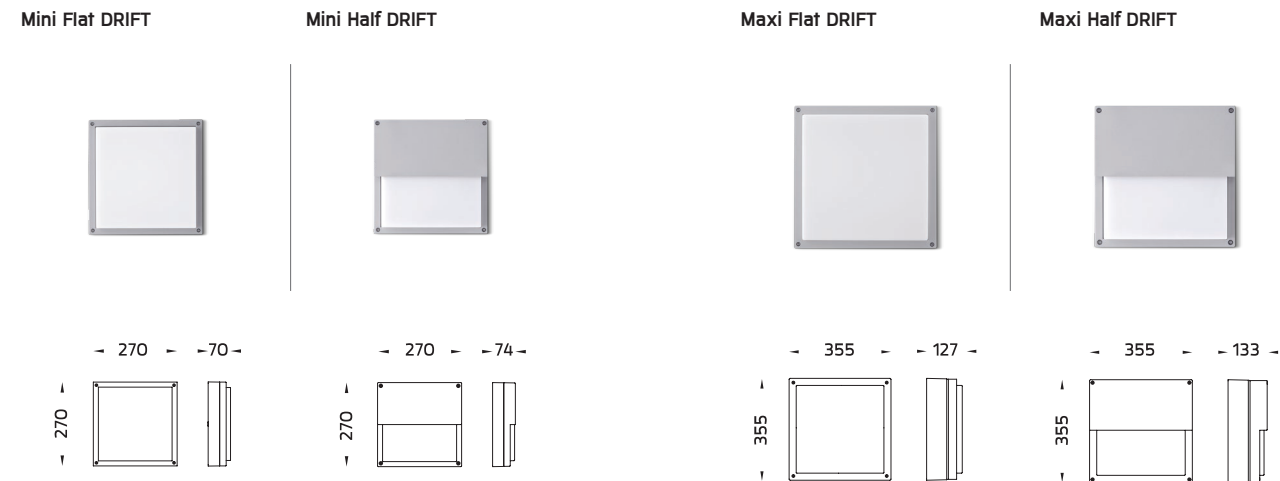

Mini DRIFT

Application Type : Wall surface mount
Subgroup : General wall light

Mini Flat DRIFT / 7024	
Mini Half DRIFT / 7035	
Luminaire Performance	
500 – 940 lm	
9 W	
55 – 104 lm/W	
Beam Options	
Color Temperature	
3000K/ 4000K	
Controller	
On-Off/ On-Off with Microwave sensor/ DALI	
Input Options	
220–240Vac 50/60Hz	

Maxi Flat DRIFT

Application Type : Wall surface mount
Subgroup : General wall light

Maxi Flat DRIFT / 7032	
Mini Half DRIFT / 7036	
Luminaire Performance	
960 – 1860 lm	
23 – 26 W	
36 – 74 lm/W	
Beam Options	
Color Temperature	
3000K/ 4000K	
Controller	
On-Off/ On-Off with Microwave sensor/ DALI	
Input Options	
220–240Vac 50/60Hz	

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller			Ordering Code
Mini Flat DRIFT	OD-7024	9 W	N/A	3000 K	940 lm	104 lm/W			•	7024-0-5-803-XX
			N/A	4000 K	940 lm	104 lm/W			•	7024-0-5-807-XX
			N/A	3000 K	940 lm	104 lm/W	•			7024-0-3-803-XX
			N/A	4000 K	940 lm	104 lm/W	•			7024-0-3-807-XX
			N/A	3000 K	940 lm	104 lm/W		•		7024-0-3-804-XX
			N/A	4000 K	940 lm	104 lm/W		•		7024-0-3-808-XX
Mini Half DRIFT	OD-7035	9 W	N/A	3000 K	500 lm	55 lm/W			•	7035-0-5-803-XX
			N/A	4000 K	500 lm	55 lm/W			•	7035-0-5-807-XX
			N/A	3000 K	500 lm	55 lm/W	•			7035-0-3-803-XX
			N/A	4000 K	500 lm	55 lm/W	•			7035-0-3-807-XX
			N/A	3000 K	500 lm	55 lm/W		•		7035-0-3-804-XX
			N/A	4000 K	500 lm	55 lm/W		•		7035-0-3-808-XX
Maxi Flat DRIFT	OD-7032	23 W	N/A	3000 K	1620 lm	70 lm/W			•	7032-0-5-987-XX
		25 W	N/A	3000 K	1860 lm	74 lm/W	•			7032-0-3-987-XX
		4000 K	N/A	1860 lm	74 lm/W	•				7032-0-3-988-XX
		26 W	N/A	4000 K	1860 lm	71 lm/W		•		7032-0-3-822-XX
Maxi Half DRIFT	OD-7036	25 W	N/A	3000 K	960 lm	38 lm/W	•			7036-0-3-987-XX
		26 W	N/A	3000 K	960 lm	36 lm/W		•		7036-0-3-821-XX

*Please contact sales team for special request.



Council of engineers, Bangkok – THAILAND

DARIUS

■ WALL SURFACE MOUNT



DARIUS is a circular shaped general wall surface mount luminaire suitable for general illumination tasks. The housing is made from low copper content aluminum and high impact resistant polycarbonate lens. The lens is designed with a twist-lock mechanism for tool free maintenance and relamping.

DARIUS is available with built in AC COB or E27 lamp holder for compact fluorescent or retrofit LED lamps.

The high protection rating of IP65 and IK09 allows **DARIUS** to be installed in most outdoor environments. With a diffused light distribution, it provides general illumination in private and public areas and is perfect for commercial use.



www.unilamp.co.th/en/p/darius


Specification

- Body housing made of die-cast aluminium.
- UV stabilized polyester powder coat.
- Vandal proof PC cover.
- Durable gasket.
- Stainless steel screws.
- Installation must be carried out according to the enclosed product manual.

Available Color



DARIUS



DARIUS

Application Type : Wall Surface Mount
Subgroup : General wall light

DARIUS / 7071	
Luminaire Performance	
	950 lm
	12 W
Beam Options	
Color Temperature	
	4000K
Controller	
	On-Off [AC LED]
Input Options	
	220-240Vac 50/60Hz

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Controller	Ordering Code
						AC LED	
DARIUS	OD-7071	12 W	N/A	4000 K	950 lm	•	7071-0-3-856-XX

*Please contact sales team for special request.





VELA is a uniquely designed accent light suitable for a multitude of use cases. The use of computer aided optical design and the latest generation of LED result in class leading luminaire performance. The integrated DALI2 control gear simplifies project planning and product installation. Perfect beam alignment is effortless with the built in two axis adjustment of **VELA**. LED control gear and light engine is upgrade- and replaceable.



www.unilamp.co.th/en/p/vela

Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast alloy body and components.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Molded Lens from renowned manufacturer.
- GFR PA6.6 terminal block.
- Installation must be carried out according to the enclosed product manual.

Available Color



****Custom colors are available on request.**


Typical Application



VELA



VELA



VELA

NEW!

Application Type : Accent light	
VELA / 9910	
Luminaire Performance	
420 – 440 lm	
10 W	
42 – 44 lm/W	
Beam Options	
<div>Sharp Elliptical H</div> 	
Color Temperature	
2700/ 3000K/ 4000K	
Controller	
On-off/ DALI	
Input Voltage	
220–240Vac 50/60Hz	

Accessories



Pre-wired cable



Glare shield cap

VELA	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller		Ordering Code
									
	OD-9910	10 W	Sharp Elliptical H	2700 K	420 lm	42 lm/W	• • •		9910-P-3-630-XX
				3000 K	420 lm	42 lm/W			9910-P-3-644-XX
				4000 K	440 lm	44 lm/W			9910-P-3-645-XX
				2700 K	420 lm	42 lm/W	• • •		9910-P-5-630-XX
				3000 K	420 lm	42 lm/W			9910-P-5-644-XX
				4000 K	440 lm	44 lm/W			9910-P-5-645-XX

**Please contact sales team for special request.*



AGAR

- WALL SURFACE MOUNT
- BOLLARD



AGAR a range of wall light and bollard with COB LED which are generally installed in the walk ways, parks and open spaces. The vandal resistant polycarbonate diffuser is available in prismatic or opal option. It spreads the light evenly on walls and surfaces. **AGAR** provides glare free lighting for the architectural environment as well as being an eye-catching object. Three color temperatures with a high CRI makes **AGAR** suitable for professional lighting application. The bollard height can be customized according to specific requirement. An anchorage unit is available as an accessory.



Content
by Application



Content
by Family



www.unilamp.co.th/en/p/agar

Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum and extruded aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Polycarbonate protective cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- GFR PA6.6 terminal block.
- Weather proof TPE grommet.
- Bollard pre-wired with outdoor cable.
- Installation must be carried out according to the enclosed product manual.

Available Color



****Custom colors are available on request.**



1. LED Module

High power LED in COB technology.
2700K, 3000K and 4000K.
CRI >80 / 3-Step MacAdam ellipse.

2. Diffuser

Self-extinguishing PC diffuser.
Protect against mechanical impact.
UV stabilized.

3. Heat Sink

Integrated CFC-AL[®] heat sink.
Designed and tested under ambient thermal condition Ta 40°C-50°C.

4. Control Gear

High quality constant current driver.
Conforms to safety and EMC regulation.

5. Body Housing

Enhanced LM6 die-cast aluminum body.
Low copper content (<0.1%)
Utilize 16 stages pre-treatment and coating process.




Airvac System Technology, Bangkok -- THAILAND


AGAR



Mini AGAR
Wall Light



AGAR
Wall Light



Mini AGAR
Bollard



AGAR
Bollard



AGAR

Application Type : Wall Surface Mount
Subgroup : Wall Effect Light

Mini AGAR Wall light / 7019
AGAR Wall light / 7029

Luminaire Performance

190 – 1620 lm
11 – 28 W
17 – 75 lm/W
COB LED/ AC COB

Beam Options



Color Temperature

3000K/ 4000K

Controller

On-Off
On-Off [AC LED]

Input Options

220–240Vac 50/60Hz

AGAR

Application Type : Bollard
Subgroup : Semi Shielded Bollard

Mini AGAR Bollard / 7154
AGAR Bollard / 7123

Luminaire Performance

190 – 2490 lm
11 – 43 W
17 – 57 lm/W
COB LED/ AC COB

Beam Options



Color Temperature

3000K/ 4000K

Controller

On-Off
On-Off [AC LED]

Input Options

220–240Vac 50/60Hz

Accessories



Anchor bolt



IP68 Connector

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller		Ordering Code
									
Mini AGAR Wall Light	OD-7019								
		11 W 12 W	N/A N/A	3000 K 4000 K	190 lm 210 lm	17 lm/W 17 lm/W	•	•	7019-0-3-869-XX 7019-0-3-856-XX
AGAR Wall Light	OD-7029								
		18 W 18 W 28 W	N/A N/A N/A	3000 K 4000 K 3000 K	1320 lm 1350 lm 1620 lm	73 lm/W 75 lm/W 57 lm/W	• • •		7029-0-3-902-XX 7029-0-3-905-XX 7029-0-3-887-XX
Mini AGAR Bollard	OD-7154								
		28 W 43 W 43 W	N/A N/A N/A	3000 K 3000 K 4000 K	1620 lm 2420 lm 2490 lm	57 lm/W 56 lm/W 57 lm/W	• • •		7123-0-3-887-XX 7123-0-3-902-XX 7123-0-3-905-XX
AGAR Bollard	OD-7123								
		11 W 12 W	N/A N/A	3000 K 4000 K	190 lm 210 lm	17 lm/W 17 lm/W	•	•	7154-0-3-869-XX 7154-0-3-856-XX


*Please contact sales team for special request.



La Villa, Ayutthaya - THAILAND

NEW Release CASA

- CEILING MOUNT
- WALL SURFACE MOUNT
- BOLLARD

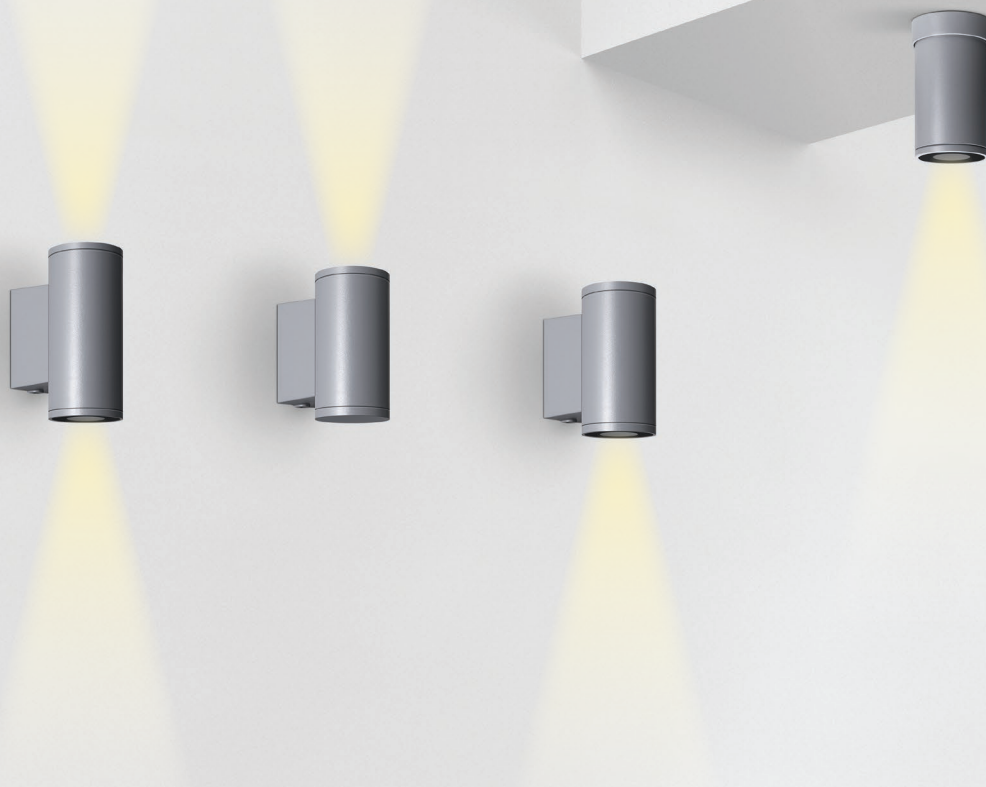

The **CASA** luminaire range is the perfect lighting tool for residential lighting tasks. Although small in size the lighting performance satisfies professional standards. **CASA** is available as single or double directional wall light, surface mounted downlight and bollard. Computer optimized reflectors and diffuser generate light with remarkable brilliance and color consistency. Excellent corrosion resistance is archived through the use of high quality extruded aluminum and enhanced LM6 die cast alloy. **CASA** is suitable for environments up to 50°C.



www.unilamp.co.th/en/p/casa

Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum / extruded aluminum housing.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Polycarbonate diffuser.
- Post-cured silicone gasket.
- High quality LED module and driver.
- GFR PA6.6 terminal block.
- Weather proof TPE grommet.
- Installation must be carried out according to the enclosed product manual.

Available Color



****Custom colors are available on request.**



Typical Application



CASA




CASA – Up / Down

CASA – Down

CASA – Up

CASA

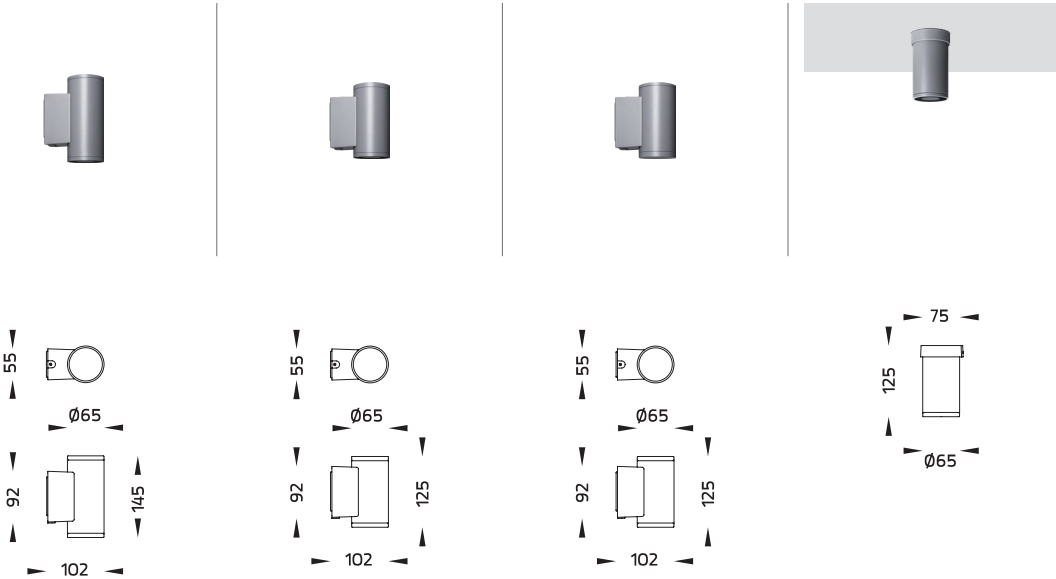

CASA

NEW!

Application Type : Wall surface mount / Ceiling mount
Subgroup : Directed wall light

- CASA – Up / Down / 5054
- CASA – Down / 5052
- CASA – Up / 5053
- CASA / 4052

Luminaire Performance

150 – 300 lm
3 – 5 W
50 – 60 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

On-Off

Input Options

220–240Vac 50/60Hz





CASA
Bollard Root Mount /
Bollard Root Mount CVDA

CASA
Short Bollard Root Mount /
Short Bollard Root Mount CVDA

CASA
Bollard Flange Base /
Bollard Flange Base CVDA

CASA
Short Bollard Flange Base /
Short Bollard Flange Base CVDA

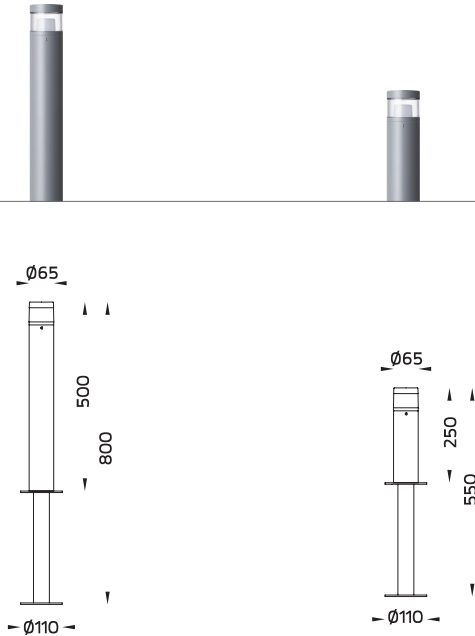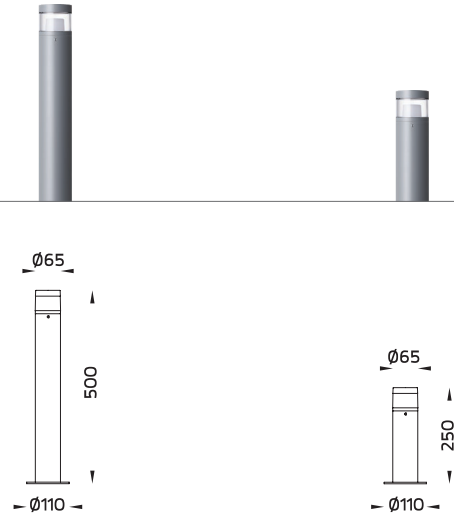

CASA

NEW!

Application Type : Bollard
Subgroup : General bollard

CASA – Bollard Root Mount / Root Mount CVDA / 7186
CASA – Short Bollard Root Mount / Root Mount CVDA / 7187
CASA – Bollard Flange Base / Bollard Flange Base CVDA / 7188
CASA – Short Bollard Flange Base / Flange Base CVDA / 7189

Luminaire Performance

90 – 120 lm
2.1 – 3 W
30 – 57 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

On-Off/ DALI/ Remote

Input Options

220–240Vac 50/60Hz
24Vdc

Accessories



CV Driver



IP68 Connector



Uplight Shield
Cover

CASA

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller			Ordering Code
									REMOTE	
CASA Up / Down	OD-5054 	5 W	30°[70°]	2700 K 3000 K 4000 K	300 lm 300 lm 300 lm	60 lm/W 60 lm/W 60 lm/W	• • •			5054-B-3-561-XX 5054-B-3-562-XX 5054-B-3-563-XX
	OD-5052 	3 W	30°[70°]	2700 K 3000 K 4000 K	150 lm 150 lm 150 lm	50 lm/W 50 lm/W 50 lm/W	• • •			5052-B-3-561-XX 5052-B-3-562-XX 5052-B-3-563-XX
CASA Up	OD-5053 	3 W	30°[70°]	2700 K 3000 K 4000 K	150 lm 150 lm 150 lm	50 lm/W 50 lm/W 50 lm/W	• • •			5053-B-3-561-XX 5053-B-3-562-XX 5053-B-3-563-XX
CASA	OD-4052 	3 W	30°[70°]	2700 K 3000 K 4000 K	150 lm 150 lm 150 lm	50 lm/W 50 lm/W 50 lm/W	• • •			4052-B-3-561-XX 4052-B-3-562-XX 4052-B-3-563-XX
CASA Short Bollard	OD-7187  Root Mount	3 W	N/A	2700 K 3000 K 4000 K	90 lm 90 lm 90 lm	30 lm/W 30 lm/W 30 lm/W	• • •			7187-0-3-561-XX 7187-0-3-562-XX 7187-0-3-563-XX
	 Root Mount CVDA	2.1 W	N/A	2700 K 3000 K 4000 K	120 lm 120 lm 120 lm	57 lm/W 57 lm/W 57 lm/W			• • •	7187-0-7-429-XX 7187-0-7-430-XX 7187-0-7-431-XX
CASA Bollard	OD-7189  Flange Base	3 W	N/A	2700 K 3000 K 4000 K	90 lm 90 lm 90 lm	30 lm/W 30 lm/W 30 lm/W	• • •			7189-0-3-561-XX 7189-0-3-562-XX 7189-0-3-563-XX
	 Flange Base CVDA	2.1 W	N/A	2700 K 3000 K 4000 K	120 lm 120 lm 120 lm	57 lm/W 57 lm/W 57 lm/W			• • •	7189-0-7-429-XX 7189-0-7-430-XX 7189-0-7-431-XX
CASA Bollard	OD-7186  Root Mount	3 W	N/A	2700 K 3000 K 4000 K	90 lm 90 lm 90 lm	30 lm/W 30 lm/W 30 lm/W	• • •			7186-0-3-561-XX 7186-0-3-562-XX 7186-0-3-563-XX
	 Root Mount CVDA	2.1 W	N/A	2700 K 3000 K 4000 K	120 lm 120 lm 120 lm	57 lm/W 57 lm/W 57 lm/W		• • •		7186-0-7-429-XX 7186-0-7-430-XX 7186-0-7-431-XX
CASA Bollard	OD-7188  Flange Base	3 W	N/A	2700 K 3000 K 4000 K	90 lm 90 lm 90 lm	30 lm/W 30 lm/W 30 lm/W	• • •			7188-0-3-561-XX 7188-0-3-562-XX 7188-0-3-563-XX
	 Flange Base CVDA	2.1 W	N/A	2700 K 3000 K 4000 K	120 lm 120 lm 120 lm	57 lm/W 57 lm/W 57 lm/W			• • •	7188-0-7-429-XX 7188-0-7-430-XX 7188-0-7-431-XX

*Please contact sales team for special request.



NEWLY Added CAP

■ BOLLARD


The **CAP** Family is a fresh range of bollards and low mounted pole lights. Designed from scratch with the latest lighting requirements in mind. The highly efficient LEDs are shielded and emit no upward light. The light engine features great color consistency, excellent color rendering index and dimming options. Specification grade optics make the medium sized version a highly competitive lighting tool for demanding professional lighting tasks. With its compact dimensions the small sized **CAP** is a smart solution for residential lighting projects. Regardless of size the prewired supply cable, numerous mounting solutions and minimized amount of screws assure a simplified installation process.



Content
by Application



Content
by Family

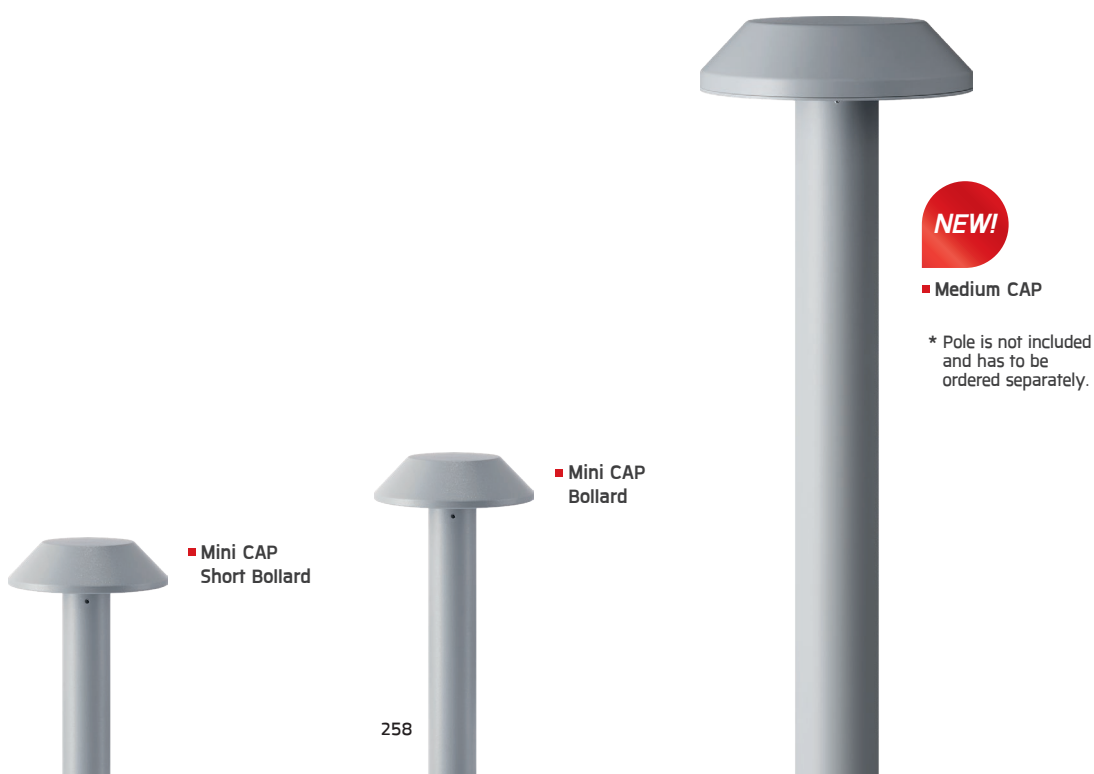

www.unilamp.co.th/en/p/cap

Specification


- Designed, manufactured and tested according to IEC 60598
- LM6 die cast aluminum and extruded aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Bollard pre-wired with outdoor cable.
- Installation must be carried out according to the enclosed product manual.

Available Color




***Custom colors are available on request.*


■ Medium CAP 90



■ Medium CAP 180




■ Medium CAP 360

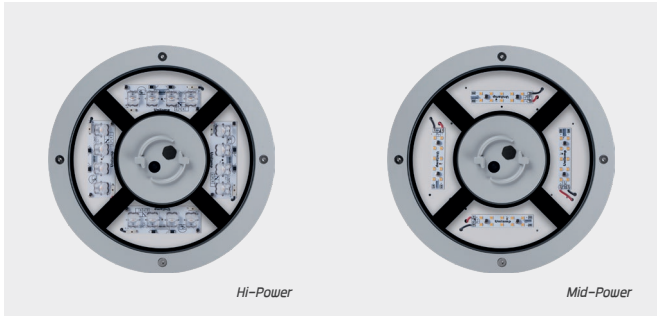

■ Medium CAP

* Pole is not included and has to be ordered separately.

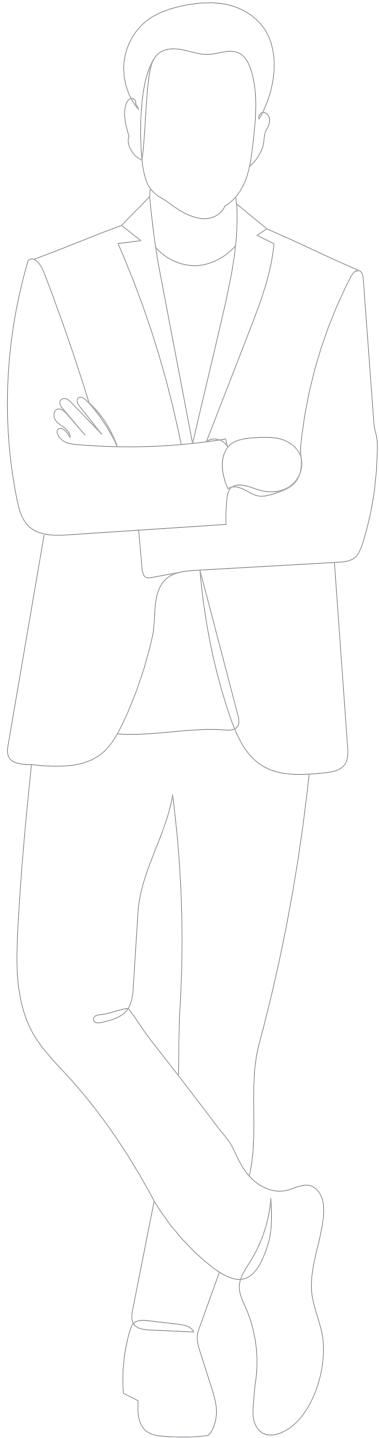


• MODULAR SOLUTIONS

Medium CAP

Bollard Version



* Pole is not included and has to be ordered separately.


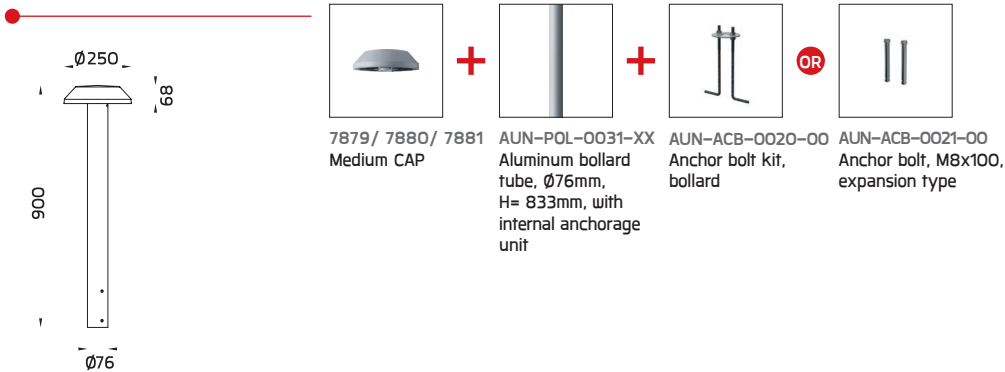


Medium CAP

Pole Light Version



* Pole is not included and has to be ordered separately.

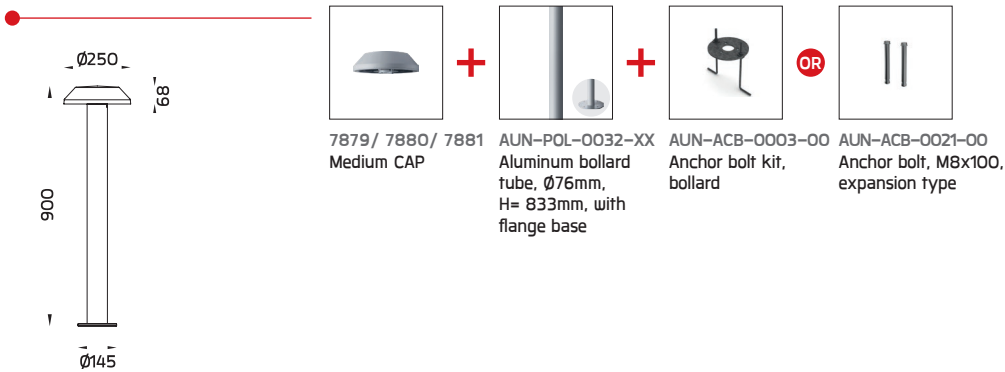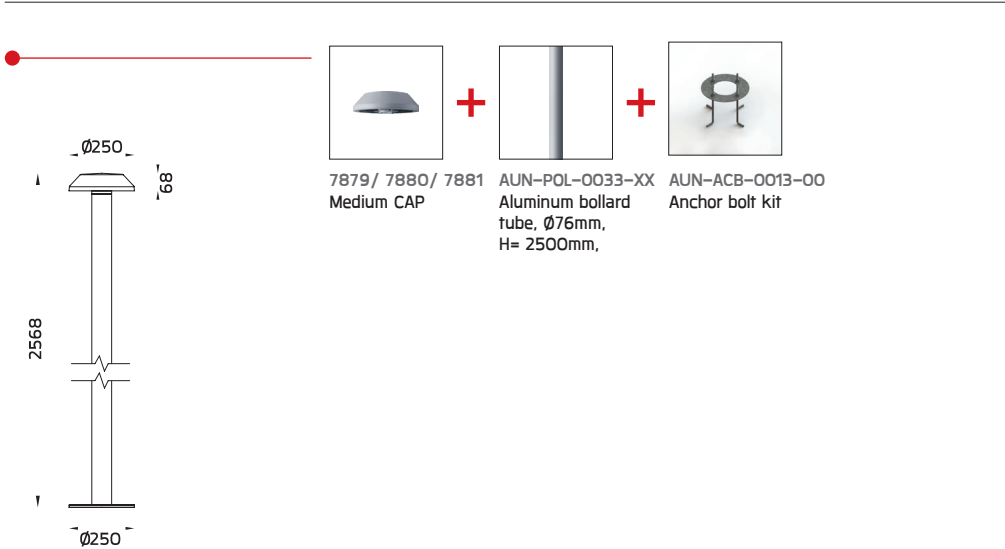



CAP




Mini CAP – Short Bollard
Flange Base /
Flange Base CVDA

Mini CAP – Short Bollard
Root Mount Base /
Root Mount Base CVDA

Mini CAP – Bollard
Flange Base /
Flange Base CVDA

Mini CAP – Bollard
Root Mount Base /
Root Mount Base CVDA

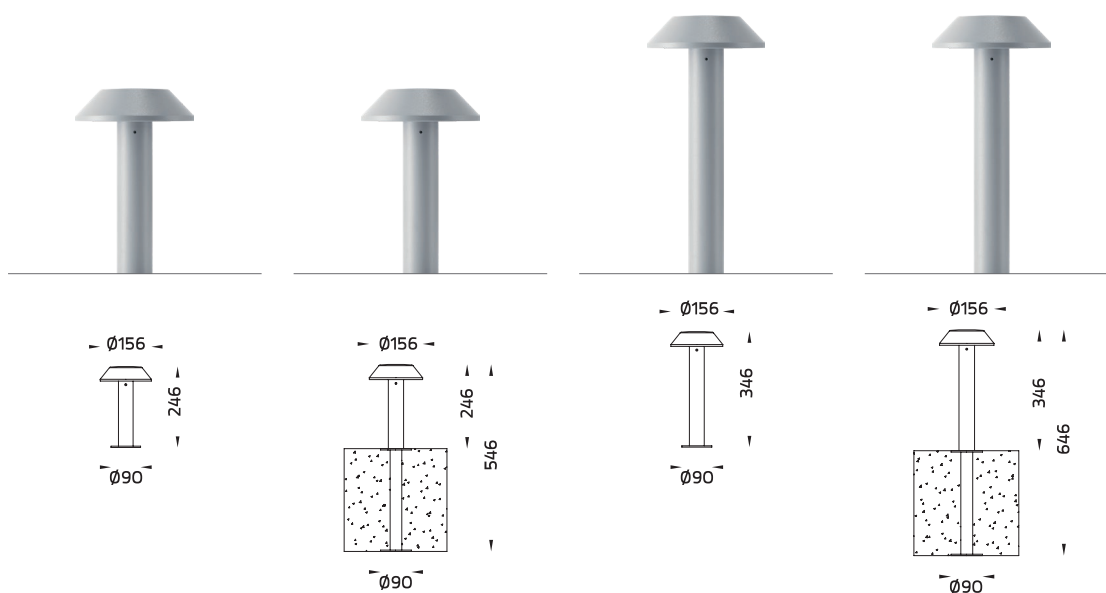

Mini CAP

Application Type : Bollard

Mini CAP – Short Bollard Flange Base / Flange Base CVDA / 7178
Mini CAP – Short Bollard Root Mount Base / Root Mount Base CVDA / 7878
Mini CAP – Bollard Flange Base / Flange Base CVDA / 7177
Mini CAP – Bollard Root Mount Base / Root Mount Base CVDA / 7877

Luminaire Performance

640 – 1010 lm
4.8 – 9 W
91 – 150 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

On-Off/ On-Off / DALI / Remote

Input Options

220–240Vac 50/60Hz
24Vdc

Accessories



Pre-wired cable



CV Driver




Medium CAP 90 / Medium CAP 180 / Medium CAP 360



NEW!

* Pole is not included and has to be ordered separately.



Medium CAP

NEW!


Application Type : Bollard
Subgroup : Shielded bollard

Medium CAP 90 / 7879
Medium CAP 180 / 7880
Medium CAP 360 / 7881

Luminaire Performance

710 – 3600 lm
11 – 32 W
60 – 117 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K


Controller

On-Off/ 1-10V/ DALI/ CASAMBI

Input Options

220-240Vac 50/60Hz

Accessories

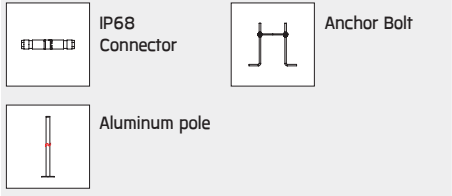

Mini CAP – Short Bollard

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller						Ordering Code
												
OD-7178  Flange Base	7 W	N/A	2700 K	640 lm	91 lm/W	•						7178-0-3-574-XX 7178-0-3-575-XX 7178-0-3-576-XX
			3000 K	670 lm	95 lm/W	•						
			4000 K	720 lm	102 lm/W	•						
	9 W	N/A	2700 K	930 lm	103 lm/W	•						7178-0-3-560-XX 7178-0-3-921-XX 7178-0-3-922-XX
			3000 K	950 lm	105 lm/W	•						
			4000 K	1010 lm	112 lm/W	•						
 Flange Base CVDA	4.8 W	N/A	2700 K	640 lm	133 lm/W						•	7178-0-7-698-XX 7178-0-7-699-XX 7178-0-7-700-XX
			3000 K	670 lm	139 lm/W						•	
			4000 K	720 lm	150 lm/W						•	
	7 W	N/A	2700 K	640 lm	91 lm/W	•						7878-0-3-574-XX 7878-0-3-575-XX 7878-0-3-576-XX
			3000 K	670 lm	95 lm/W	•						
			4000 K	720 lm	102 lm/W	•						
 Root Mount Base	9 W	N/A	2700 K	930 lm	103 lm/W	•						7878-0-3-560-XX 7878-0-3-921-XX 7878-0-3-922-XX
			3000 K	950 lm	105 lm/W	•						
			4000 K	1010 lm	112 lm/W	•						
	4.8 W	N/A	2700 K	640 lm	133 lm/W						•	7878-0-7-698-XX 7878-0-7-699-XX 7878-0-7-700-XX
			3000 K	670 lm	139 lm/W						•	
			4000 K	720 lm	150 lm/W						•	
 Root Mount Base CVDA	7 W	N/A	2700 K	640 lm	91 lm/W	•						7177-0-3-574-XX 7177-0-3-575-XX 7177-0-3-576-XX
			3000 K	670 lm	95 lm/W	•						
			4000 K	720 lm	102 lm/W	•						
	9 W	N/A	2700 K	930 lm	103 lm/W	•						7177-0-3-560-XX 7177-0-3-921-XX 7177-0-3-922-XX
			3000 K	950 lm	105 lm/W	•						
			4000 K	1010 lm	112 lm/W	•						
 Flange Base CVDA	4.8 W	N/A	2700 K	640 lm	133 lm/W		•					7177-0-7-698-XX 7177-0-7-699-XX 7177-0-7-700-XX
			3000 K	670 lm	139 lm/W		•					
			4000 K	720 lm	150 lm/W		•					
OD-7178  Flange Base	7 W	N/A	2700 K	640 lm	91 lm/W	•						7177-0-3-574-XX 7177-0-3-575-XX 7177-0-3-576-XX
			3000 K	670 lm	95 lm/W	•						
			4000 K	720 lm	102 lm/W	•						
	9 W	N/A	2700 K	930 lm	103 lm/W	•						7177-0-3-560-XX 7177-0-3-921-XX 7177-0-3-922-XX
			3000 K	950 lm	105 lm/W	•						
			4000 K	1010 lm	112 lm/W	•						
 Root Mount Base	9 W	N/A	2700 K	930 lm	103 lm/W	•						7877-0-3-560-XX 7877-0-3-921-XX 7877-0-3-922-XX
			3000 K	950 lm	105 lm/W	•						
			4000 K	1010 lm	112 lm/W	•						
	4.8 W	N/A	2700 K	640 lm	133 lm/W						•	7877-0-7-698-XX 7877-0-7-699-XX 7877-0-7-700-XX
			3000 K	670 lm	139 lm/W						•	
			4000 K	720 lm	150 lm/W						•	
 Root Mount Base CVDA	7 W	N/A	2700 K	640 lm	91 lm/W	•						7877-0-3-574-XX 7877-0-3-575-XX 7877-0-3-576-XX
			3000 K	670 lm	95 lm/W	•						
			4000 K	720 lm	102 lm/W	•						
	9 W	N/A	2700 K	930 lm	103 lm/W	•						7877-0-3-560-XX 7877-0-3-921-XX 7877-0-3-922-XX
			3000 K	950 lm	105 lm/W	•						
			4000 K	1010 lm	112 lm/W	•						
OD-7879  Medium CAP 90	11 W	T2	2700 K	710 lm	64 lm/W	•						7879-I-3-523-XX 7879-I-3-897-XX 7879-I-3-898-XX 7879-I-4-523-XX 7879-I-4-897-XX 7879-I-4-898-XX 7879-I-5-523-XX 7879-I-5-897-XX 7879-I-5-898-XX 7879-I-A-523-XX 7879-I-A-897-XX 7879-I-A-898-XX
			3000 K	710 lm	64 lm/W	•						
			4000 K	760 lm	69 lm/W	•						
			2700 K	710 lm	64 lm/W			•				
			3000 K	710 lm	64 lm/W			•				
			4000 K	760 lm	69 lm/W			•				
			2700 K	710 lm	64 lm/W				•			
			3000 K	710 lm	64 lm/W				•			
			4000 K	760 lm	69 lm/W				•			
			2700 K	710 lm	64 lm/W					•		
			3000 K	710 lm	64 lm/W					•		
			4000 K	760 lm	69 lm/W					•		
	11 W	T3	2700 K	710 lm	64 lm/W	•						7879-J-3-523-XX 7879-J-3-897-XX 7879-J-3-898-XX 7879-J-4-523-XX 7879-J-4-897-XX 7879-J-4-898-XX 7879-J-5-523-XX 7879-J-5-897-XX 7879-J-5-898-XX 7879-J-A-523-XX 7879-J-A-897-XX 7879-J-A-898-XX
			3000 K	710 lm	64 lm/W	•						
			4000 K	760 lm	69 lm/W	•						
			2700 K	710 lm	64 lm/W			•				
			3000 K	710 lm	64 lm/W			•				
			4000 K	760 lm	69 lm/W			•				
			2700 K	710 lm	64 lm/W				•			
			3000 K	710 lm	64 lm/W				•			
			4000 K	760 lm	69 lm/W				•			
			2700 K	710 lm	64 lm/W					•		
			3000 K	710 lm	64 lm/W					•		
			4000 K	760 lm	69 lm/W					•		

*Please contact sales team for special request.

Medium CAP 90

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller						Ordering Code
										CASAMBI	REMOTE	
OD-7879 	16 W	T2	2700 K	1030 lm	64 lm/W	•						7879-I-3-524-XX
			3000 K	1030 lm	64 lm/W	•						7879-I-3-867-XX
			4000 K	1090 lm	68 lm/W	•						7879-I-3-868-XX
			2700 K	1030 lm	64 lm/W			•				7879-I-4-524-XX
			3000 K	1030 lm	64 lm/W			•				7879-I-4-867-XX
			4000 K	1090 lm	68 lm/W			•				7879-I-4-868-XX
			2700 K	1030 lm	64 lm/W				•			7879-I-5-524-XX
			3000 K	1030 lm	64 lm/W				•			7879-I-5-867-XX
			4000 K	1090 lm	68 lm/W				•			7879-I-5-868-XX
			2700 K	1030 lm	64 lm/W					•		7879-I-A-524-XX
			3000 K	1030 lm	64 lm/W					•		7879-I-A-867-XX
			4000 K	1090 lm	68 lm/W					•		7879-I-A-868-XX
	16 W	T3	2700 K	1030 lm	64 lm/W	•						7879-J-3-524-XX
			3000 K	1030 lm	64 lm/W	•						7879-J-3-867-XX
			4000 K	1090 lm	68 lm/W	•						7879-J-3-868-XX
			2700 K	1030 lm	64 lm/W			•				7879-J-4-524-XX
			3000 K	1030 lm	64 lm/W			•				7879-J-4-867-XX
			4000 K	1090 lm	68 lm/W			•				7879-J-4-868-XX
			2700 K	1030 lm	64 lm/W				•			7879-J-5-524-XX
			3000 K	1030 lm	64 lm/W				•			7879-J-5-867-XX
			4000 K	1090 lm	68 lm/W				•			7879-J-5-868-XX
			2700 K	1030 lm	64 lm/W					•		7879-J-A-524-XX
			3000 K	1030 lm	64 lm/W					•		7879-J-A-867-XX
			4000 K	1090 lm	68 lm/W					•		7879-J-A-868-XX
	19 W	T2	2700 K	1340 lm	70 lm/W	•						7879-I-3-568-XX
			3000 K	1340 lm	70 lm/W	•						7879-I-3-570-XX
			4000 K	1430 lm	75 lm/W	•						7879-I-3-572-XX
			2700 K	1340 lm	70 lm/W			•				7879-I-4-568-XX
			3000 K	1340 lm	70 lm/W			•				7879-I-4-570-XX
			4000 K	1430 lm	75 lm/W			•				7879-I-4-572-XX
			2700 K	1340 lm	70 lm/W				•			7879-I-5-568-XX
			3000 K	1340 lm	70 lm/W				•			7879-I-5-570-XX
			4000 K	1430 lm	75 lm/W				•			7879-I-5-572-XX
			2700 K	1340 lm	70 lm/W					•		7879-I-A-568-XX
			3000 K	1340 lm	70 lm/W					•		7879-I-A-570-XX
			4000 K	1430 lm	75 lm/W					•		7879-I-A-572-XX
	19 W	T3	2700 K	1440 lm	75 lm/W	•						7879-J-3-568-XX
			3000 K	1440 lm	75 lm/W	•						7879-J-3-570-XX
			4000 K	1540 lm	81 lm/W	•						7879-J-3-572-XX
			2700 K	1440 lm	75 lm/W			•				7879-J-4-568-XX
			3000 K	1440 lm	75 lm/W			•				7879-J-4-570-XX
			4000 K	1540 lm	81 lm/W			•				7879-J-4-572-XX
			2700 K	1440 lm	75 lm/W				•			7879-J-5-568-XX
			3000 K	1440 lm	75 lm/W				•			7879-J-5-570-XX
			4000 K	1540 lm	81 lm/W				•			7879-J-5-572-XX
			2700 K	1440 lm	75 lm/W					•		7879-J-A-568-XX
			3000 K	1440 lm	75 lm/W					•		7879-J-A-570-XX
			4000 K	1540 lm	81 lm/W					•		7879-J-A-572-XX
	27 W	T2	2700 K	1860 lm	68 lm/W	•						7879-I-3-567-XX
			3000 K	1860 lm	68 lm/W	•						7879-I-3-569-XX
			4000 K	1990 lm	73 lm/W	•						7879-I-3-571-XX
			2700 K	1860 lm	68 lm/W			•				7879-I-4-567-XX
			3000 K	1860 lm	68 lm/W			•				7879-I-4-569-XX
			4000 K	1990 lm	73 lm/W			•				7879-I-4-571-XX
			2700 K	1860 lm	68 lm/W				•			7879-I-5-567-XX
			3000 K	1860 lm	68 lm/W				•			7879-I-5-569-XX
			4000 K	1990 lm	73 lm/W				•			7879-I-5-571-XX
			2700 K	1860 lm	68 lm/W					•		7879-I-A-567-XX
			3000 K	1860 lm	68 lm/W					•		7879-I-A-569-XX
			4000 K	1990 lm	73 lm/W					•		7879-I-A-571-XX
	27 W	T3	2700 K	2010 lm	74 lm/W	•						7879-J-3-567-XX
			3000 K	2010 lm	74 lm/W	•						7879-J-3-569-XX
			4000 K	2150 lm	79 lm/W	•						7879-J-3-571-XX
			2700 K	2010 lm	74 lm/W			•				7879-J-4-567-XX
			3000 K	2010 lm	74 lm/W			•				7879-J-4-569-XX
			4000 K	2150 lm	79 lm/W			•				7879-J-4-571-XX
			2700 K	2010 lm	74 lm/W				•			7879-J-5-567-XX
			3000 K	2010 lm	74 lm/W				•			7879-J-5-569-XX
			4000 K	2150 lm	79 lm/W				•			7879-J-5-571-XX
			2700 K	2010 lm	74 lm/W					•		7879-J-A-567-XX
			3000 K	2010 lm	74 lm/W					•		7879-J-A-569-XX
			4000 K	2150 lm	79 lm/W					•		7879-J-A-571-XX

Medium CAP 180



OD-7880

19 W	T2	2700 K	1250 lm	65 lm/W	•							7880-I-3-523-XX
		3000 K	1250 lm	65 lm/W	•							7880-I-3-897-XX
		4000 K	1340 lm	70 lm/W	•							7880-I-3-898-XX
		2700 K	1250 lm	65 lm/W				•				7880-I-4-523-XX
		3000 K	1250 lm	65 lm/W				•				7880-I-4-897-XX
		4000 K	1340 lm	70 lm/W				•				7880-I-4-898-XX
		2700 K	1250 lm	65 lm/W					•			7880-I-5-523-XX
		3000 K	1250 lm	65 lm/W					•			7880-I-5-897-XX
		4000 K	1340 lm	70 lm/W					•			7880-I-5-898-XX
		2700 K	1250 lm	65 lm/W						•		7880-I-5-523-XX
		3000 K	1250 lm	65 lm/W						•		7880-I-5-897-XX
		4000 K	1340 lm	70 lm/W						•		7880-I-5-898-XX

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller						Ordering Code	
								 			CASAMBI	REMOTE		
Medium CAP 180	OD-7880		19 W	T2	2700 K	1250 lm	65 lm/W							7880-I-A-523-XX
	3000 K				1250 lm	65 lm/W						•		7880-I-A-897-XX
	4000 K				1340 lm	70 lm/W						•		7880-I-A-898-XX
	19 W		T4	2700 K	1440 lm	75 lm/W	•							7880-K-3-523-XX
				3000 K	1440 lm	75 lm/W	•							7880-K-3-897-XX
				4000 K	1540 lm	81 lm/W	•							7880-K-3-898-XX
				2700 K	1440 lm	75 lm/W			•					7880-K-4-523-XX
				3000 K	1440 lm	75 lm/W			•					7880-K-4-897-XX
				4000 K	1540 lm	81 lm/W			•					7880-K-4-898-XX
				2700 K	1440 lm	75 lm/W				•				7880-K-5-523-XX
				3000 K	1440 lm	75 lm/W				•				7880-K-5-897-XX
				4000 K	1540 lm	81 lm/W				•				7880-K-5-898-XX
		2700 K		1440 lm	75 lm/W					•			7880-K-A-523-XX	
		3000 K		1440 lm	75 lm/W					•			7880-K-A-897-XX	
		4000 K		1540 lm	81 lm/W					•			7880-K-A-898-XX	
	30 W	T2	2700 K	1800 lm	60 lm/W	•							7880-I-3-524-XX	
			3000 K	1800 lm	60 lm/W	•							7880-I-3-867-XX	
			4000 K	1920 lm	64 lm/W	•							7880-I-3-868-XX	
			2700 K	1800 lm	60 lm/W			•					7880-I-4-524-XX	
			3000 K	1800 lm	60 lm/W			•					7880-I-4-867-XX	
			4000 K	1920 lm	64 lm/W			•					7880-I-4-868-XX	
			2700 K	1800 lm	60 lm/W				•				7880-I-5-524-XX	
			3000 K	1800 lm	60 lm/W				•				7880-I-5-867-XX	
			4000 K	1920 lm	64 lm/W				•				7880-I-5-868-XX	
			2700 K	1800 lm	60 lm/W					•			7880-I-A-524-XX	
			3000 K	1800 lm	60 lm/W					•			7880-I-A-867-XX	
			4000 K	1920 lm	64 lm/W					•			7880-I-A-868-XX	
	30 W	T4	2700 K	2070 lm	69 lm/W	•							7880-K-3-524-XX	
			3000 K	2070 lm	69 lm/W	•							7880-K-3-867-XX	
			4000 K	2200 lm	73 lm/W	•							7880-K-3-868-XX	
			2700 K	2070 lm	69 lm/W			•					7880-K-4-524-XX	
			3000 K	2070 lm	69 lm/W			•					7880-K-4-867-XX	
			4000 K	2200 lm	73 lm/W			•					7880-K-4-868-XX	
			2700 K	2070 lm	69 lm/W				•				7880-K-5-524-XX	
			3000 K	2070 lm	69 lm/W				•				7880-K-5-867-XX	
			4000 K	2200 lm	73 lm/W				•				7880-K-5-868-XX	
			2700 K	2070 lm	69 lm/W					•			7880-K-A-524-XX	
			3000 K	2070 lm	69 lm/W					•			7880-K-A-867-XX	
			4000 K	2200 lm	73 lm/W					•			7880-K-A-868-XX	
Medium CAP 360	OD-7881		18 W	T5	2700 K	1540 lm	85 lm/W	•						7881-L-3-524-XX
	3000 K				1540 lm	85 lm/W	•							7881-L-3-867-XX
	4000 K				1660 lm	92 lm/W	•							7881-L-3-868-XX
	2700 K				1540 lm	85 lm/W			•					7881-L-4-524-XX
	3000 K				1540 lm	85 lm/W			•					7881-L-4-867-XX
	4000 K				1660 lm	92 lm/W			•					7881-L-4-868-XX
	2700 K				1540 lm	85 lm/W				•				7881-L-5-524-XX
	3000 K				1540 lm	85 lm/W				•				7881-L-5-867-XX
	4000 K				1660 lm	92 lm/W				•				7881-L-5-868-XX
	2700 K				1540 lm	85 lm/W					•			7881-L-A-524-XX
	3000 K				1540 lm	85 lm/W					•			7881-L-A-867-XX
	4000 K				1660 lm	92 lm/W					•			7881-L-A-868-XX
	2700 K				1650 lm	91 lm/W	•							7881-M-3-524-XX
	3000 K				1650 lm	91 lm/W	•							7881-M-3-867-XX
	4000 K				1770 lm	98 lm/W	•							7881-M-3-868-XX
	2700 K				1650 lm	91 lm/W			•					7881-M-4-524-XX
	3000 K				1650 lm	91 lm/W			•					7881-M-4-867-XX
	4000 K				1770 lm	98 lm/W			•					7881-M-4-868-XX
	2700 K				1650 lm	91 lm/W				•				7881-M-5-524-XX
	3000 K				1650 lm	91 lm/W				•				7881-M-5-867-XX
	4000 K				1770 lm	98 lm/W				•				7881-M-5-868-XX
	2700 K				1650 lm	91 lm/W					•			7881-M-A-524-XX
	3000 K				1650 lm	91 lm/W					•			7881-M-A-867-XX
	4000 K				1770 lm	98 lm/W					•			7881-M-A-868-XX
	22 W		N/A	2700 K	2360 lm	107 lm/W	•							7881-O-3-574-XX
				3000 K	2460 lm	111 lm/W	•							7881-O-3-575-XX
				4000 K	2590 lm	117 lm/W	•							7881-O-3-576-XX
				2700 K	2360 lm	107 lm/W			•					7881-O-4-574-XX
				3000 K	2460 lm	111 lm/W			•					7881-O-4-575-XX
				4000 K	2590 lm	117 lm/W			•					7881-O-4-576-XX
				2700 K	2360 lm	107 lm/W				•				7881-O-5-574-XX
				3000 K	2460 lm	111 lm/W				•				7881-O-5-575-XX
	4000 K		2590 lm	117 lm/W				•				7881-O-5-576-XX		
	26 W		T5	2700 K	2140 lm	82 lm/W				•				7881-O-A-574-XX
				3000 K	2460 lm	111 lm/W					•			7881-O-A-575-XX
				4000 K	2590 lm	117 lm/W					•			7881-O-A-576-XX
		2700 K		2140 lm	82 lm/W	•							7881-L-3-523-XX	
		3000 K		2140 lm	82 lm/W	•							7881-L-3-897-XX	
		4000 K		2300 lm	88 lm/W	•							7881-L-3-898-XX	
2700 K		2140 lm		82 lm/W			•					7881-L-4-523-XX		
3000 K		2140 lm		82 lm/W			•					7881-L-4-897-XX		
4000 K	2300 lm	88 lm/W			•					7881-L-4-898-XX				

Medium CAP 360

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller						Ordering Code
OD-7881 	26 W	T5	2700 K	2140 lm	82 lm/W				•			7881-L-5-523-XX
			3000 K	2140 lm	82 lm/W				•			7881-L-5-897-XX
			4000 K	2300 lm	88 lm/W				•			7881-L-5-898-XX
			2700 K	2140 lm	82 lm/W					•		7881-L-A-523-XX
			3000 K	2140 lm	82 lm/W					•		7881-L-A-897-XX
			4000 K	2300 lm	88 lm/W					•		7881-L-A-898-XX
			2700 K	2290 lm	88 lm/W	•						7881-M-3-523-XX
			3000 K	2290 lm	88 lm/W	•						7881-M-3-897-XX
			4000 K	2470 lm	95 lm/W	•						7881-M-3-898-XX
			2700 K	2290 lm	88 lm/W			•				7881-M-4-523-XX
			3000 K	2290 lm	88 lm/W			•				7881-M-4-897-XX
			4000 K	2470 lm	95 lm/W			•				7881-M-4-898-XX
	32 W	N/A	2700 K	2290 lm	88 lm/W				•			7881-M-5-523-XX
			3000 K	2290 lm	88 lm/W				•			7881-M-5-897-XX
			4000 K	2470 lm	95 lm/W				•			7881-M-5-898-XX
			2700 K	2290 lm	88 lm/W					•		7881-M-A-523-XX
			3000 K	2290 lm	88 lm/W					•		7881-M-A-897-XX
			4000 K	2470 lm	95 lm/W					•		7881-M-A-898-XX
			2700 K	3280 lm	102 lm/W	•						7881-O-3-560-XX
			3000 K	3380 lm	105 lm/W	•						7881-O-3-921-XX
			4000 K	3600 lm	112 lm/W	•						7881-O-3-922-XX
			2700 K	3280 lm	102 lm/W			•				7881-O-4-560-XX
			3000 K	3380 lm	105 lm/W			•				7881-O-4-921-XX
			4000 K	3600 lm	112 lm/W			•				7881-O-4-922-XX
			2700 K	3280 lm	102 lm/W				•			7881-O-5-560-XX
			3000 K	3380 lm	105 lm/W				•			7881-O-5-921-XX
			4000 K	3600 lm	112 lm/W				•			7881-O-5-922-XX
			2700 K	3280 lm	102 lm/W					•		7881-O-A-560-XX
			3000 K	3380 lm	105 lm/W					•		7881-O-A-921-XX
			4000 K	3600 lm	112 lm/W					•		7881-O-A-922-XX



CYCLOPS

■ BOLLARD

CYCLOPS family is an innovative walkway lighting solution with shielded light sources. Delivering light exactly where it is needed without disruptive glare. Operated with multiple LED with built in heat sink. The light is precisely controlled by carefully designed lenses and is directed onto the illuminated surface. The vandal resistant clear polycarbonate cover protects the bollard from harmful impact, dust and water. **CYCLOPS** is available in two sizes and two heights with 180 and 360-degree light distribution. **CYCLOPS** can be installed in residential areas, walkways, parks, commercial areas and open spaces. It provides illumination for modern architectural environment as well as being an eye-catching object. Pre-wired cables and a twist-locking mechanism ensure an easy installation. **CYCLOPS** can be customized to required heights. The anchorage unit for concrete foundation is available as an accessory.



www.unilamp.co.th/en/p/cyclops





Supalai Life Thaphra – Wongwian Yai, Bangkok – THAILAND



Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum and extruded aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Polycarbonate protective cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.

Available Color




****Custom colors are available on request.**

CYCLOPS



Mini CYCLOPS /
Mini CYCLOPS – CVDA

Mini CYCLOPS Short /
Mini CYCLOPS Short – CVDA

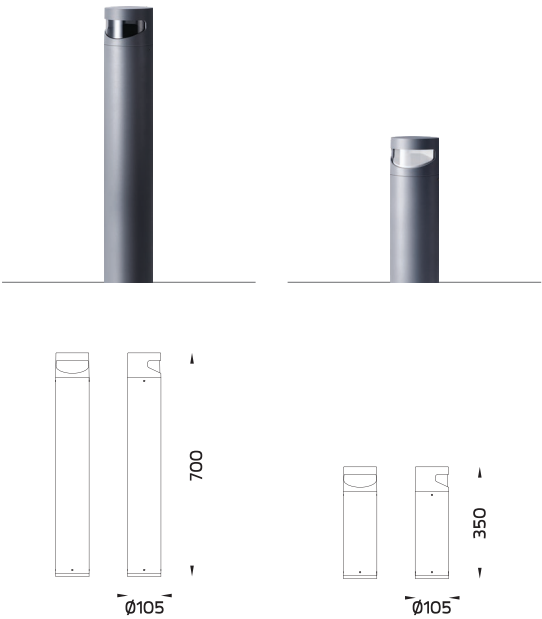

Phoneix Market City Mall, Pune – INDIA

Mini CYCLOPS

Application Type : Bollard
Subgroup : Semi shielded bollard

- Mini CYCLOPS / 7175
- Mini CYCLOPS – CVDA / 7175
- Mini CYCLOPS Short / 7176
- Mini CYCLOPS Short – CVDA / 7176

Luminaire Performance	
	210 – 1090 lm
	7.5 – 14 W
	26 – 77 lm/W
Beam Options	
Forward Throw	Side Throw
Color Temperature	
2700K/ 3000K/ 4000K	
Controller	
On–Off/ On–Off / DALI / DALI	
Input Options	
220–240Vac 50/60Hz	
24Vdc	

Accessories	
	Anchor bolt
	IP68 Connector
	CV Driver




CYCLOPS

CYCLOPS – DS

CYCLOPS Short

CYCLOPS Short – DS

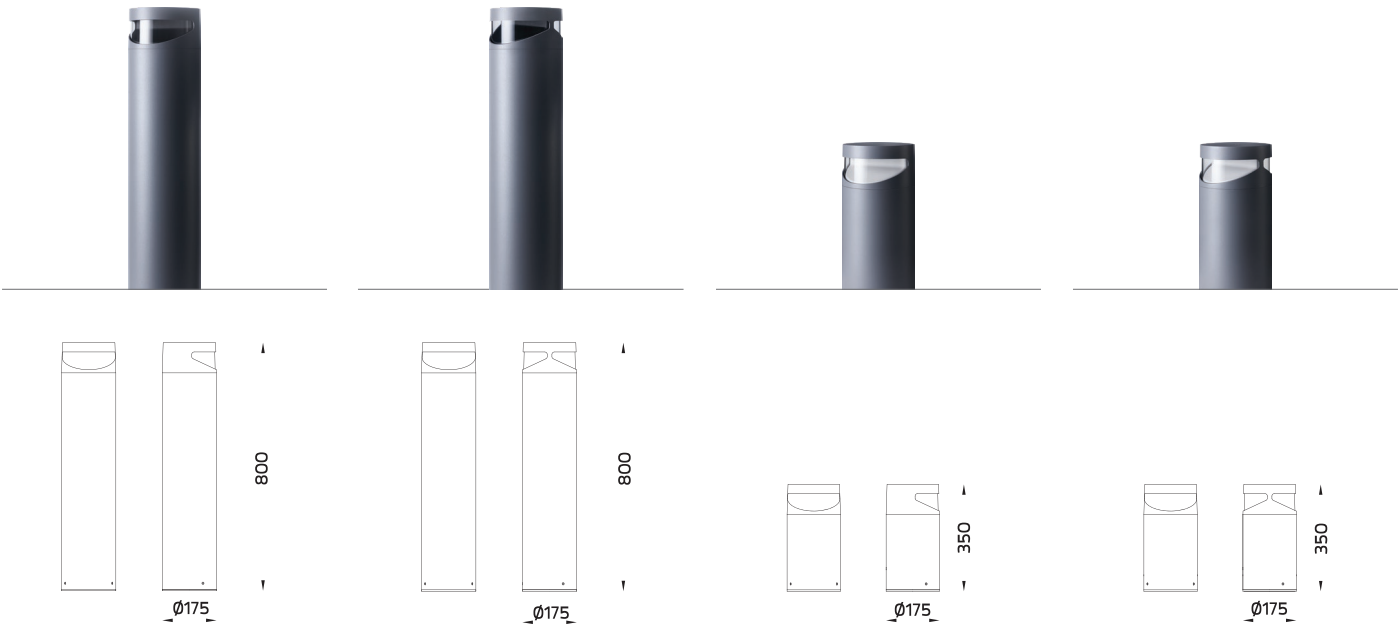

CYCLOPS


Application Type : Bollard
Subgroup : Semi shielded bollard

CYCLOPS / 7171
CYCLOPS – DS / 7172
CYCLOPS Short / 7173
CYCLOPS Short – DS / 7174

Luminaire Performance

340 – 1500 lm
10 – 25 W
30 – 60 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

On-Off/ 1-10V/ DALI

Input Options

220-240Vac 50/60Hz

Accessories



Anchor bolt



IP68 Connector

CYCLOPS

Mini CYCLOPS
CVDA

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code
OD-7175 	7.5 W	Forward throw	3000 K	210 lm	28 lm/W	•				7175-K-3-546-XX
		Side throw	3000 K	290 lm	38 lm/W	•				7175-I-3-546-XX
	8.4 W	Forward throw	3000 K	290 lm	34 lm/W		•			7175-K-7-656-XX
		Side throw	3000 K	400 lm	47 lm/W		•			7175-I-7-656-XX
	11 W	Forward throw	2700 K	290 lm	26 lm/W	•				7175-K-3-676-XX
			3000 K	290 lm	26 lm/W	•				7175-K-3-544-XX
			2700 K	290 lm	26 lm/W				•	7175-K-5-676-XX
		Side throw	2700 K	400 lm	36 lm/W	•				7175-I-3-676-XX
			3000 K	400 lm	36 lm/W	•				7175-I-3-544-XX
			4000 K	420 lm	38 lm/W	•				7175-I-3-545-XX
			3000 K	400 lm	36 lm/W				•	7175-I-5-544-XX
OD-7176 	7.5 W	Forward throw	3000 K	550 lm	73 lm/W	•				7176-K-3-546-XX
			4000 K	440 lm	58 lm/W	•				7176-K-3-547-XX
		Side throw	3000 K	470 lm	62 lm/W	•				7176-I-3-546-XX
	11 W	Forward throw	3000 K	760 lm	69 lm/W	•				7176-K-3-544-XX
			4000 K	790 lm	71 lm/W	•				7176-K-3-545-XX
		Side throw	3000 K	760 lm	69 lm/W				•	7176-K-5-544-XX
			3000 K	640 lm	58 lm/W	•				7176-I-3-544-XX
	14 W	Forward throw	3000 K	1090 lm	77 lm/W		•			7176-K-7-654-XX
OD-7171 	10 W	Forward throw	3000 K	380 lm	38 lm/W	•				7171-O-3-897-XX
			4000 K	400 lm	40 lm/W	•				7171-O-3-898-XX
		Side throw	4000 K	340 lm	34 lm/W	•				7171-I-3-898-XX
	19 W	Forward throw	2700 K	720 lm	37 lm/W	•				7171-K-3-567-XX
			3000 K	720 lm	37 lm/W	•				7171-K-3-569-XX
			4000 K	760 lm	40 lm/W	•				7171-K-3-571-XX
		Forward throw	3000 K	720 lm	37 lm/W			•		7171-K-4-569-XX
			4000 K	760 lm	40 lm/W			•		7171-K-4-571-XX
			2700 K	720 lm	37 lm/W				•	7171-K-5-567-XX
	19 W	Side throw	3000 K	720 lm	37 lm/W				•	7171-K-5-569-XX
			3000 K	720 lm	37 lm/W					7171-I-3-569-XX
		Side throw	4000 K	620 lm	32 lm/W	•				7171-I-3-571-XX
			4000 K	660 lm	34 lm/W	•				7171-I-3-571-XX
			4000 K	660 lm	34 lm/W				•	7171-I-5-571-XX
OD-7172 	19 W	Forward throw	2700 K	600 lm	31 lm/W	•				7172-O-3-523-XX
			3000 K	600 lm	31 lm/W	•				7172-O-3-897-XX
			4000 K	650 lm	34 lm/W	•				7172-O-3-898-XX
		Side throw	3000 K	570 lm	30 lm/W	•				7172-I-3-897-XX
	25 W	Forward throw	3000 K	1170 lm	46 lm/W	•				7172-K-3-570-XX
			3000 K	1170 lm	46 lm/W				•	7172-K-5-570-XX
	25 W	Side throw	3000 K	1100 lm	44 lm/W	•				7172-I-3-570-XX
			4000 K	1170 lm	46 lm/W	•				7172-I-3-572-XX
		Side throw	4000 K	1170 lm	46 lm/W			•		7172-I-4-572-XX
			3000 K	1100 lm	44 lm/W				•	7172-I-5-570-XX
OD-7173 	10 W	Forward throw	2700 K	470 lm	47 lm/W	•				7173-O-3-523-XX
			3000 K	470 lm	47 lm/W	•				7173-O-3-897-XX
			4000 K	500 lm	50 lm/W	•				7173-O-3-898-XX
	19 W	Forward throw	2700 K	1020 lm	53 lm/W	•				7173-K-3-567-XX
			3000 K	1020 lm	53 lm/W	•				7173-K-3-569-XX
		Side throw	4000 K	1060 lm	55 lm/W	•				7173-I-3-571-XX
			4000 K	1060 lm	55 lm/W				•	7173-I-5-571-XX
OD-7174 	19 W	Forward throw	3000 K	790 lm	41 lm/W	•				7174-O-3-897-XX
			4000 K	840 lm	44 lm/W	•				7174-O-3-898-XX
		Side throw	3000 K	780 lm	41 lm/W	•				7174-I-3-897-XX
	25 W	Forward throw	2700 K	1500 lm	60 lm/W	•				7174-K-3-568-XX
			3000 K	1500 lm	60 lm/W	•				7174-K-3-570-XX
		Forward throw	3000 K	1500 lm	60 lm/W			•		7174-K-4-570-XX
			2700 K	1500 lm	60 lm/W				•	7174-K-5-568-XX
	25 W	Side throw	3000 K	1490 lm	59 lm/W	•				7174-I-3-570-XX

*Please contact sales team for special request.



FUJI

■ BOLLARD

FUJI is a family of shielded bollard with symmetrical light distribution. **FUJI** is fitted with the latest generation of COB LED with exceptional color consistency. It is generally installed in walkways, parks, commercial areas and open spaces. It provides general lighting for the residential areas where light pollution has to be controlled. The bollard height can be customized according to specific requirement. An anchorage unit is available as an accessory.



www.unilamp.co.th/en/p/fuji

Specification


- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum and extruded aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Polycarbonate protective cover.
- Anodized aluminum reflector.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.



Available Color



***Custom colors are available on request.*

Bharat Mandapam, Venue of G20 summit, Pragati Maidan, New Delhi – INDIA

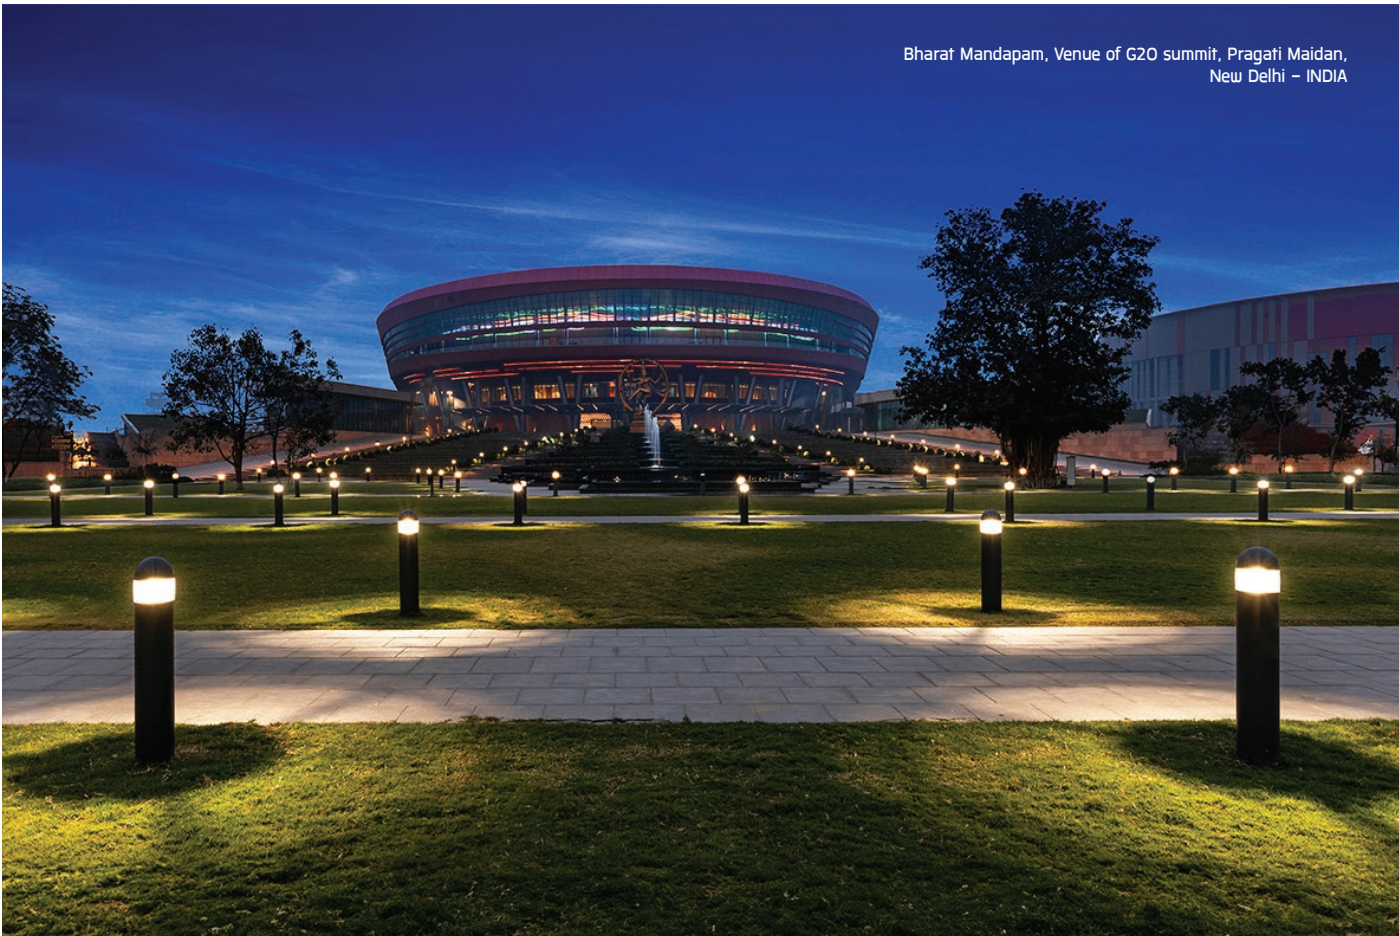

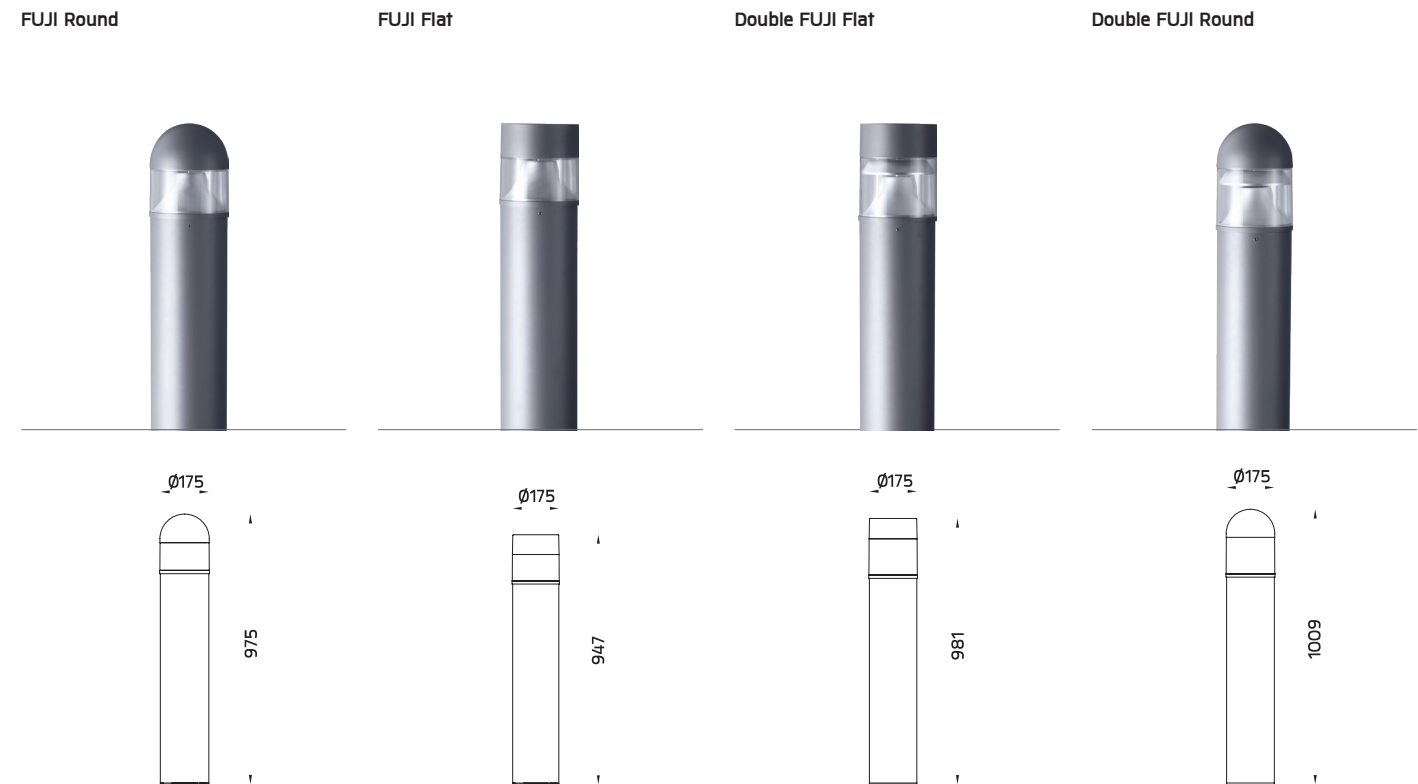

FUJI

Application Type : Bollard

Subgroup : Shielded bollard

FUJI Round / 7111	
FUJI Flat / 7112	
Double FUJI Flat / 7119	
Double FUJI Round / 7120	
Luminaire Performance	
1810 – 2950 lm	
27 – 39 W	
64 – 75 lm/W	
Beam Options	
Color Temperature	
2700K/ 3000K/ 4000K	
Controller	
On-Off/ 1-10V/ DALI	
Input Options	
220-240Vac 50/60Hz	


Accessories

Anchor bolt

IP68 Connector

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller			Ordering Code
										
FUJI Round		27 W	N/A	3000 K 3000 K	1810 lm 1810 lm	67 lm/W 67 lm/W	•		•	7111-0-3-887-XX 7111-0-5-887-XX
		39 W	N/A	3000 K 2700 K	2620 lm 2510 lm	67 lm/W 64 lm/W	•			7111-0-3-902-XX 7111-0-3-505-XX
FUJI Flat		27 W	N/A	3000 K 4000 K	1810 lm 1850 lm	67 lm/W 68 lm/W	•			7112-0-3-887-XX 7112-0-3-891-XX
		39 W	N/A	3000 K 4000 K	2620 lm 2690 lm	67 lm/W 68 lm/W	•			7112-0-3-902-XX 7112-0-3-905-XX
Double FUJI Flat		27 W	N/A	3000 K 4000 K 3000 K	1990 lm 2030 lm 1990 lm	73 lm/W 75 lm/W 73 lm/W	•	•	•	7119-0-3-887-XX 7119-0-4-891-XX 7119-0-5-887-XX
		39 W	N/A	3000 K 4000 K	2880 lm 2950 lm	73 lm/W 75 lm/W	•			7119-0-3-902-XX 7119-0-3-905-XX
Double FUJI Round		27 W	N/A	3000 K 4000 K	1990 lm 2030 lm	73 lm/W 75 lm/W	•			7120-0-3-887-XX 7120-0-3-891-XX
		39 W	N/A	4000 K	2950 lm	75 lm/W	•			7120-0-3-905-XX

*Please contact sales team for special request.

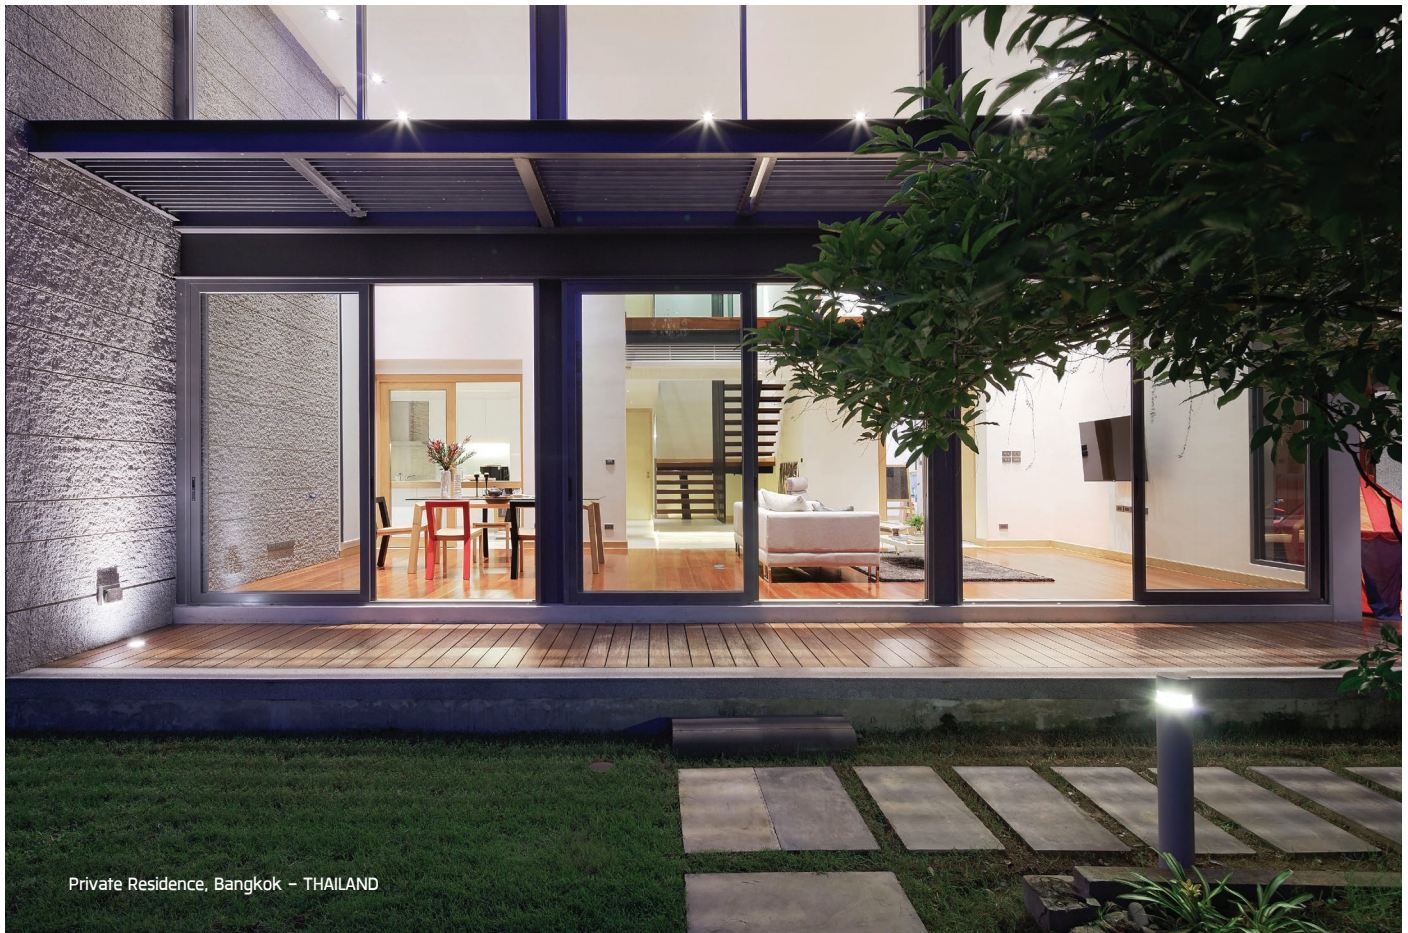

Private Residence, Bangkok - THAILAND

MACRON

■ BOLLARD

MACRON is a family of shielded bollard with symmetrical light distribution. It is equipped with the latest generation of COB LED with excellent color consistency. The clear polycarbonate cover with internal glare suppression louvers improves lighting quality by limiting the upward light emission. It is universally installed in walkways, parks, commercial areas and open spaces. It provides general lighting for the residential areas where light pollution has to be controlled. The bollard height can be customized according to specific requirement. An anchorage unit is available as an accessory.



www.unilamp.co.th/en/p/macron

Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum and extruded aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Polycarbonate protective cover.
- Anodized aluminum louvers.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.


Available Color




**Custom colors are available on request.



MACRON Flat



MACRON Round



MACRON

Application Type : Bollard
Subgroup : Semi shielded bollard

MACRON Flat/ 7107	
MACRON Round/ 7108	
Luminaire Performance	
400 – 1340 lm	
20 – 40 W	
20 – 42 lm/W	
Beam Options	
Color Temperature	
3000K/ 4000K	
Controller	
On-off/ On-Off [AC LED]/ DALI	
Input Voltage	
220-240VAC 50/60HZ	
Accessories	
	Anchor bolt
	IP68 Connector

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller			Ordering Code
MACRON Flat		20 W	N/A	3000 K	400 lm	20 lm/W		•		7107-0-3-873-XX
				4000 K	420 lm	21 lm/W		•		7107-0-3-874-XX
		27 W	N/A	3000 K	1130 lm	41 lm/W	•			7107-0-3-887-XX
				4000 K	1160 lm	42 lm/W	•			7107-0-3-891-XX
		40 W	N/A	3000 K	1130 lm	41 lm/W			•	7107-0-5-887-XX
				3000 K	1310 lm	32 lm/W	•			7107-0-3-902-XX
MACRON Round		20 W	N/A	3000 K	400 lm	20 lm/W		•		7108-0-3-873-XX
				4000 K	420 lm	21 lm/W		•		7108-0-3-874-XX
		27 W	N/A	3000 K	1130 lm	41 lm/W	•			7108-0-3-887-XX
				4000 K	1160 lm	42 lm/W	•			7108-0-3-891-XX
		40 W	N/A	3000 K	1130 lm	41 lm/W			•	7108-0-5-887-XX
				3000 K	1310 lm	32 lm/W	•			7108-0-3-902-XX
MACRON Round		20 W	N/A	3000 K	1340 lm	33 lm/W	•			7108-0-3-905-XX
				4000 K	1340 lm	33 lm/W	•			7108-0-3-905-XX
		27 W	N/A	3000 K	1130 lm	41 lm/W	•			7108-0-3-887-XX
				4000 K	1160 lm	42 lm/W	•			7108-0-3-891-XX
		40 W	N/A	3000 K	1310 lm	32 lm/W	•			7108-0-3-902-XX
				4000 K	1340 lm	33 lm/W	•			7108-0-3-905-XX

*Please contact sales team for special request.

CHARISMA

■ BOLLARD

CHARISMA range of compact to mid-size bollard and wall light designed for residential, community and commercial sites. It is pre-wired from the factory with double insulated construction therefore safe and simple to install. **CHARISMA** is designed to utilize a high efficiency reflector and COB LED and available in three color temperatures from 2700K, 3000K and 4000K. It is supplied with built-in driver in both non-dimmable and 1-10V/ DALI dimmable options. The clear polycarbonate cover with internal glare suppression louvers improves the light quality by limiting the upward light emission. The bollard height can be customized according to specific requirement. An anchorage unit is available as an accessory.



www.unilamp.co.th/en/p/charisma

Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum housing.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- GFR PA6.6 terminal block.
- Installation must be carried out according to the enclosed product manual.

Available Color



****Custom colors are available on request.**

CHARISMA

1. Reflector

High efficiency anodize brightened CAD reflector.

2. Cover

Self-extinguishing PC protective cover. Protect against UV rays and mechanical impact.

3. Driver

High quality LED constant current driver. Complied with Safety and EMC regulations.

4. Gear compartment


Injected GFR polymer housing. Protect against harmful dust and jet water.

5. Body Housing

Corrosion resistant extruded aluminum housing with Nano Ceramic protection film.




CHARISMA

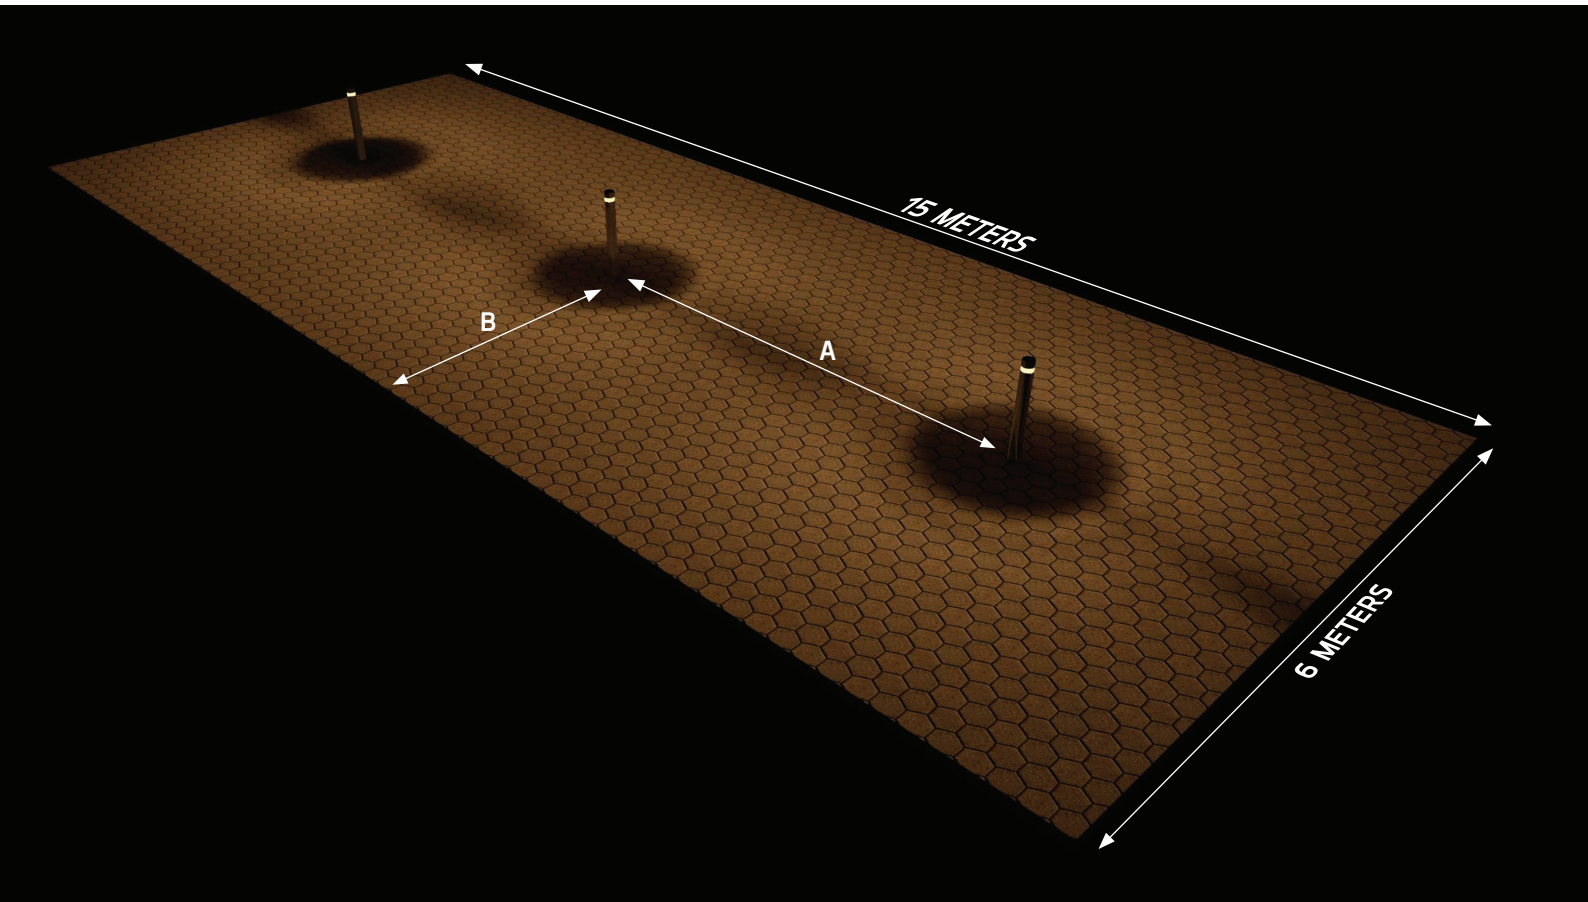

PRODUCT NAME : Medium CHARISMA4 – Round Bollard
TYPE : LED 23W 1440lm 3000K
ORDERING CODE : 7859-0-3-902-XX

DISTANCE A : 5 METERS.
DISTANCE B : 3 METERS.
MOUNTING HEIGHT : 0.9 METERS.

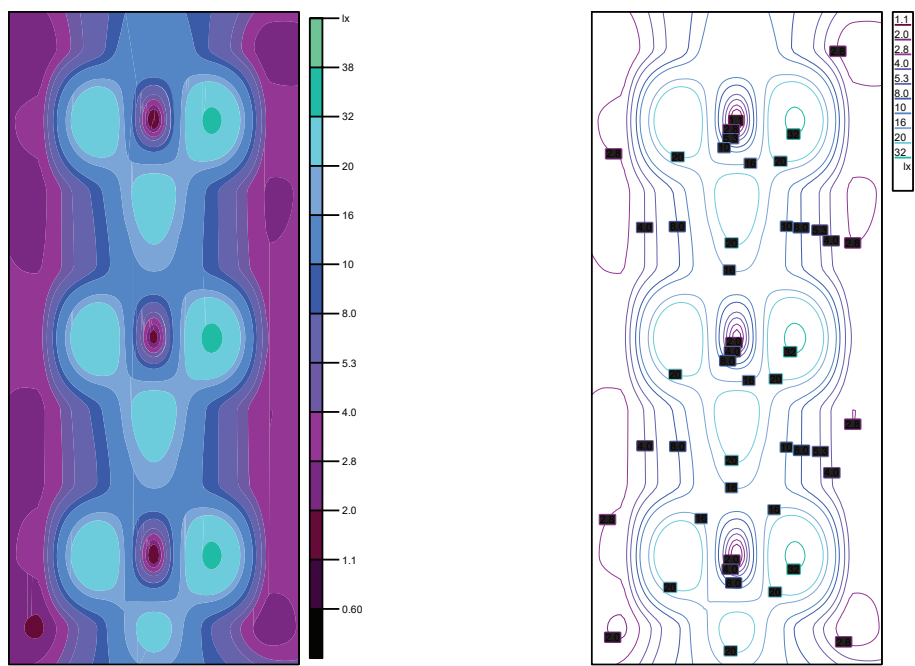



CHARISMA



Mini CHARISMA Round



Mini CHARISMA Square



Mini CHARISMA Round

Application Type : Bollard
Subgroup : Semi shielded bollard / General bollard

Mini CHARISMA Round / 7821	
Mini CHARISMA Round / 7822	
Mini CHARISMA Round / 7823	
Luminaire Performance	
420 – 810 lm	
14 W	
30 – 57 lm/W	
Beam Options	
Color Temperature	
2700K/ 3000K/ 4000K	
Controller	
On-Off/ 1-10V/ DALI	
Input Options	
220–240Vac 50/60Hz	

Accessories	
	Anchor bolt
	IP68 Connector

Mini CHARISMA Square


Application Type : Bollard
Subgroup : Semi shielded bollard / General bollard

Mini CHARISMA Square / 7824	
Mini CHARISMA Square / 7825	
Mini CHARISMA Square / 7826	
Luminaire Performance	
410 – 650 lm	
14 W	
29 – 46 lm/W	
Beam Options	
Color Temperature	
2700K/ 3000K/ 4000K	
Controller	
On-Off	
Input Options	
220–240Vac 50/60Hz	

Accessories	
	Anchor bolt
	IP68 Connector



Medium CHARISMA Round



Medium CHARISMA Round

Application Type : Bollard

Subgroup : Semi shielded bollard / Shielded bollard

Medium CHARISMA Round / 7156

Medium CHARISMA Round / 7157

Medium CHARISMA Round / 7859

Luminaire Performance

720 – 1690 lm

19 – 26 W

37 – 65 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

On-Off/ 1-10V/ DALI/ CASAMBI

Input Options

220-240Vac 50/60Hz

Accessories



Anchor bolt



IP68
Connector



Terminal 21, Nakhon Ratchasima – THAILAND

CHARISMA

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code
											
Mini CHARISMA Round	<div>OD-7821</div> 	14 W	N/A	2700 K 3000 K 4000 K 3000 K 4000 K	730 lm 770 lm 810 lm 770 lm 810 lm	52 lm/W 55 lm/W 57 lm/W 55 lm/W 57 lm/W	• • •	•	•		7821-0-3-503-XX 7821-0-3-901-XX 7821-0-3-904-XX 7821-0-4-901-XX 7821-0-5-904-XX
	<div>OD-7822</div> 	14 W	N/A	3000 K 4000 K	540 lm 570 lm	38 lm/W 40 lm/W	• •				7822-0-3-901-XX 7822-0-3-904-XX
	<div>OD-7823</div> 	14 W	N/A	2700 K 3000 K 4000 K	420 lm 440 lm 460 lm	30 lm/W 31 lm/W 32 lm/W	• • •				7823-0-3-503-XX 7823-0-3-901-XX 7823-0-3-904-XX
Mini CHARISMA Square	<div>OD-7824</div> 	14 W	N/A	2700 K 3000 K 4000 K	590 lm 620 lm 650 lm	42 lm/W 44 lm/W 46 lm/W	• • •				7824-0-3-503-XX 7824-0-3-901-XX 7824-0-3-904-XX
	<div>OD-7825</div> 	14 W	N/A	3000 K 4000 K	520 lm 550 lm	37 lm/W 39 lm/W	• •				7825-0-3-901-XX 7825-0-3-904-XX
	<div>OD-7826</div> 	14 W	N/A	3000 K 4000 K	410 lm 430 lm	29 lm/W 30 lm/W	• •				7826-0-3-901-XX 7826-0-3-904-XX
Medium CHARISMA Round	<div>OD-7156</div> 	19 W 26 W	N/A N/A	2700 K 3000 K 4000 K 3000 K 4000 K	920 lm 970 lm 990 lm 1320 lm 1360 lm	48 lm/W 51 lm/W 52 lm/W 50 lm/W 52 lm/W	• • • • •				7156-0-3-506-XX 7156-0-3-887-XX 7156-0-3-891-XX 7156-0-3-902-XX 7156-0-3-905-XX
	<div>OD-7157</div> 	19 W 26 W	N/A N/A	3000 K 3000 K 4000 K 3000 K	720 lm 980 lm 1010 lm 980 lm	37 lm/W 37 lm/W 38 lm/W 37 lm/W	• • •		•		7157-0-3-887-XX 7157-0-3-902-XX 7157-0-3-905-XX 7157-0-5-902-XX
	<div>OD-7859</div> 	19 W	N/A	2700 K 3000 K 4000 K 2700 K 3000 K 4000 K 2700 K 3000 K 4000 K	1150 lm 1200 lm 1230 lm 1150 lm 1200 lm 1230 lm 1150 lm 1200 lm 1230 lm	60 lm/W 63 lm/W 64 lm/W 60 lm/W 63 lm/W 64 lm/W 60 lm/W 63 lm/W 64 lm/W	• • • • • • • • •	• • •	• • •	7859-0-3-506-XX 7859-0-3-887-XX 7859-0-3-891-XX 7859-0-4-506-XX 7859-0-4-887-XX 7859-0-4-891-XX 7859-0-5-506-XX 7859-0-5-887-XX 7859-0-5-891-XX	
		26 W	N/A	2700 K 3000 K 4000 K 2700 K 3000 K 4000 K 2700 K 3000 K 4000 K	1580 lm 1650 lm 1690 lm 1580 lm 1650 lm 1690 lm 1580 lm 1650 lm 1690 lm	60 lm/W 63 lm/W 65 lm/W 60 lm/W 63 lm/W 65 lm/W 60 lm/W 63 lm/W 65 lm/W	• • • • • • • • •	• • •	• • •	7859-0-3-505-XX 7859-0-3-902-XX 7859-0-3-905-XX 7859-0-4-505-XX 7859-0-4-902-XX 7859-0-4-905-XX 7859-0-5-505-XX 7859-0-5-902-XX 7859-0-5-905-XX	
				2700 K 3000 K 4000 K	1580 lm 1650 lm 1690 lm	60 lm/W 63 lm/W 65 lm/W	• • •			• • •	7859-0-A-505-XX 7859-0-A-902-XX 7859-0-A-905-XX
				2700 K 3000 K 4000 K	1580 lm 1650 lm 1690 lm	60 lm/W 63 lm/W 65 lm/W	• • •			• • •	7859-0-A-505-XX 7859-0-A-902-XX 7859-0-A-905-XX
				2700 K 3000 K 4000 K	1580 lm 1650 lm 1690 lm	60 lm/W 63 lm/W 65 lm/W	• • •			• • •	7859-0-A-505-XX 7859-0-A-902-XX 7859-0-A-905-XX
				2700 K 3000 K 4000 K	1580 lm 1650 lm 1690 lm	60 lm/W 63 lm/W 65 lm/W	• • •			• • •	7859-0-A-505-XX 7859-0-A-902-XX 7859-0-A-905-XX
				2700 K 3000 K 4000 K	1580 lm 1650 lm 1690 lm	60 lm/W 63 lm/W 65 lm/W	• • •			• • •	7859-0-A-505-XX 7859-0-A-902-XX 7859-0-A-905-XX


*Please contact sales team for special request.



TOWER

■ BOLLARD

TOWER family is designed with the clean-cut line to provide scenic lighting in modern architectural environment. The Opal diffuser softens the light symmetrically while the clear diffuser with slanted louver limits the glare. The extrusion aluminum body together with high impact resistant Polycarbonate cover protect the luminaire against vandalism and corrosion. High power COB LED is installed inside this luminaire. It is available in three color temperature 2700K, 3000K or 4000K. It is suitable to be installed in gardens, pathways, squares and open spaces. The bollard height can be customized according to specific requirement. An anchorage unit is available as an accessory.

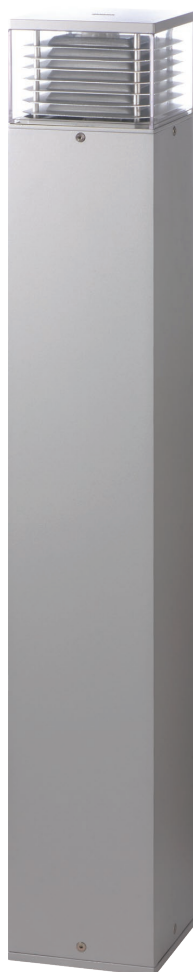

www.unilamp.co.th/en/p/tower

Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum and extruded aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Polycarbonate protective cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.


Available Color



****Custom colors are available on request.**



Private Residence – THAILAND

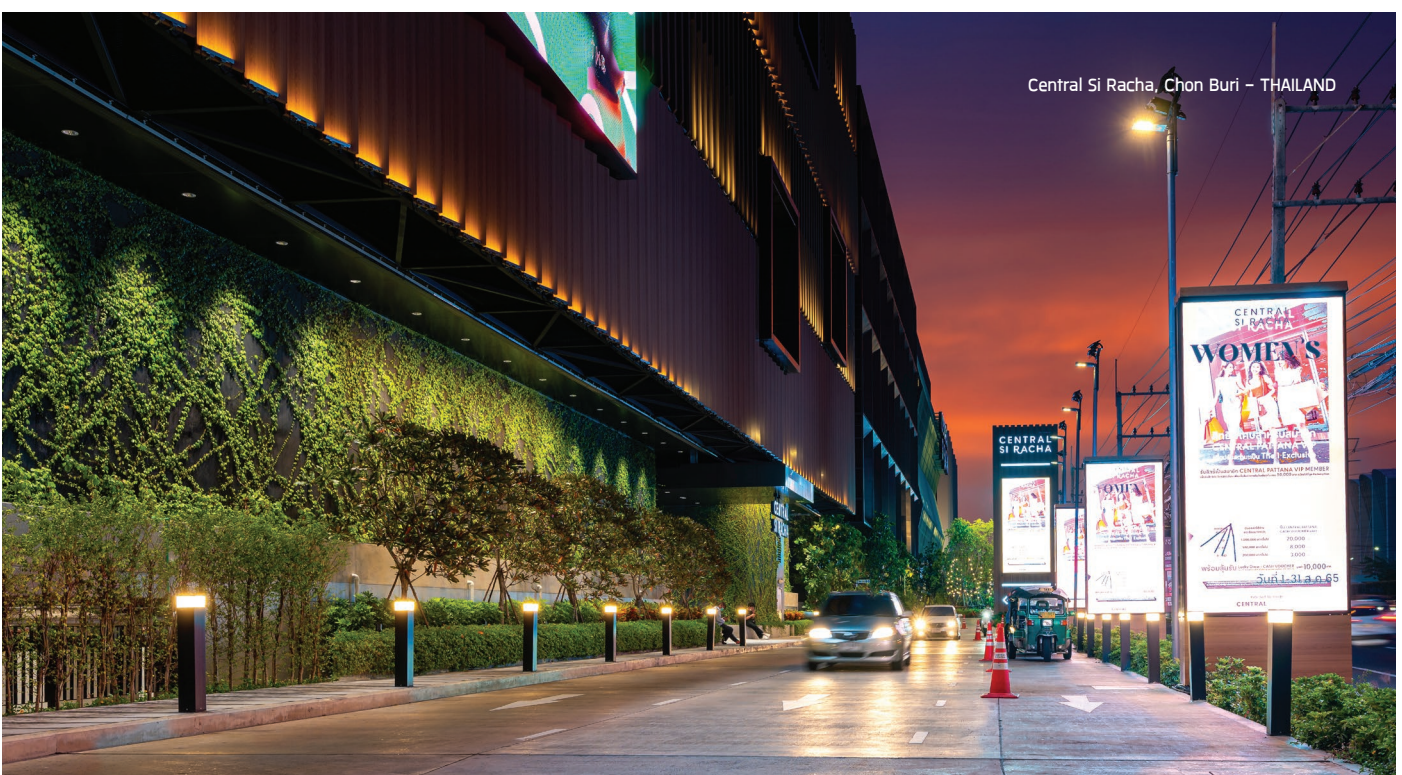

Central Si Racha, Chon Buri – THAILAND

TOWER

CE


TUV 115-2051

IP65

IK 09
10

 OR 





3
SDCM

CRI
>80

UniShield16

UniBlock

TOWER



TOWER

Application Type : Bollard
Subgroup : Semi shielded bollard/ General bollard

TOWER / 7152	
TOWER / 7153	
Luminaire Performance	
370 – 1660 lm	
20 – 42 W	
16 – 39 lm/W	
Beam Options	
 	
Color Temperature	
3000K	
Controller	
On-off/ On-off (AC LED)	
Input Voltage	
220–240VAC 50/60HZ	

Accessories	
	Anchor bolt
	IP68 Connector

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller		Ordering Code
									
TOWER	OD-7152								
		20 W	N/A	3000 K	370 lm	18 lm/W		•	7152-0-3-873-XX
		28 W	N/A	3000 K	460 lm	16 lm/W	•		7152-0-3-887-XX
	OD-7153								
		20 W	N/A	3000 K	620 lm	31 lm/W		•	7153-0-3-873-XX
		28 W	N/A	3000 K	640 lm	22 lm/W	•		7153-0-3-887-XX
		42 W	N/A	3000 K	1660 lm	39 lm/W	•		7153-0-3-902-XX

**Please contact sales team for special request.*



SE7EN

■ BOLLARD

SE7EN, the angular designed bollard installed with high quality LED and manufactured from corrosion resistant extruded aluminum. **SE7EN** is an architectural piece in itself either On or Off.

No visible screws, no light spill, pre wired cable with IP68 connection and IP66 lamp compartment **SE7EN** fulfill all the needs for modern urban scenery. Available in 2700K, 3000K and 4000K in high CRI with exceptional color consistency. **SE7EN** is a perfect match for contemporary surrounding and can be installed in walkways, parks, commercial areas and open spaces.



Content
by Application



Content
by Family



www.unilamp.co.th/en/p/se7en

Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die-cast aluminum and extruded aluminum housing.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module.
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.


Available Color



****Custom colors are available on request.**



SE7EN



SE7EN

Application Type : Bollard
Subgroup : Shielded bollard

SE7EN/ 7170


Luminaire Performance

400 – 700 lm

7 – 10 W

54 – 72 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

On-off

Input Voltage

220-240VAC 50/60HZ



Private Residence – ITALY

Accessories



IP68
Connector

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller	Ordering Code
							⏻	
SE7EN	OD-7170 	7 W	N/A	2700 K	490 lm	70 lm/W	•	7170-0-3-560-XX
				3000 K	510 lm	72 lm/W	•	7170-0-3-921-XX
				4000 K	500 lm	71 lm/W	•	7170-0-3-922-XX
		Asymmetric	Asymmetric	2700 K	400 lm	57 lm/W	•	7170-9-3-560-XX
				3000 K	420 lm	60 lm/W	•	7170-9-3-921-XX
				4000 K	410 lm	58 lm/W	•	7170-9-3-922-XX
		10 W	N/A	2700 K	680 lm	68 lm/W	•	7170-0-3-574-XX
				3000 K	700 lm	70 lm/W	•	7170-0-3-575-XX
				3000 K	570 lm	57 lm/W	•	7170-9-3-575-XX
			Asymmetric	4000 K	560 lm	56 lm/W	•	7170-9-3-576-XX
				2700 K	540 lm	54 lm/W	•	7170-N-3-574-XX


*Please contact sales team for special request.

ZOID

■ BOLLARD



ZOID is a distinctive trapezoid-outlined vertical illuminating low height light column with single sided light emission and perfect glare control. It is a Class 2 luminaire with cutting edge LED technology with absolutely flicker free light emission. LED is available in 3000K and 4000K color temperature with superb color rendering index. T5 version with electronic control gear is also available. The high quality corrosion resistance aluminum housing is filmed with Nano Ceramic and coated with super durable paint. The heat management has been delicately designed and tested under high ambient thermal condition. The height of the bollard can be customized according to specific requirement. An anchorage unit is available as an accessory.

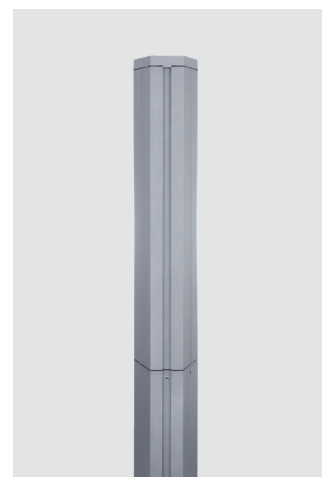

www.unilamp.co.th/en/p/zoid


Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum and extruded Aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Installation must be carried out according to the enclosed product manual.


Available Color




****Custom colors are available on request.**

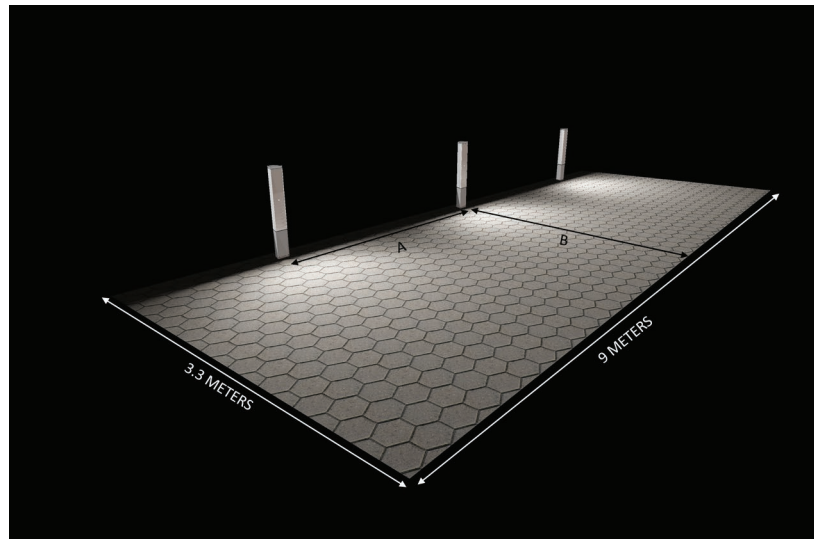

PRODUCT NAME	: ZOID Bollard	DISTANCE A	: 3 METERS
TYPE	: LED 25W 3000lm 3000K	DISTANCE B	: 3 METERS
ORDERING CODE	: 7811-O-3-937-XX	MOUNTING HEIGHT	: 1 METERS

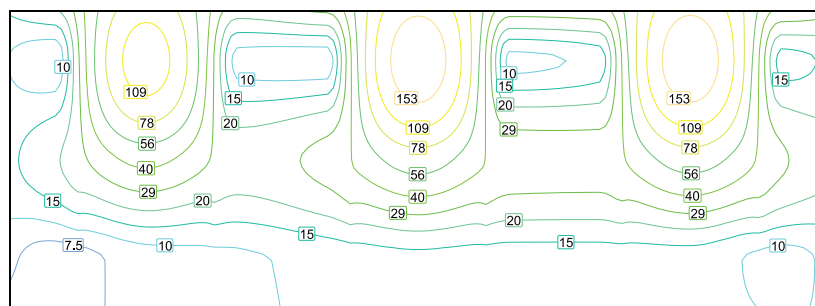

7.5 10 15 20 29 40 56 78 109 153 lx

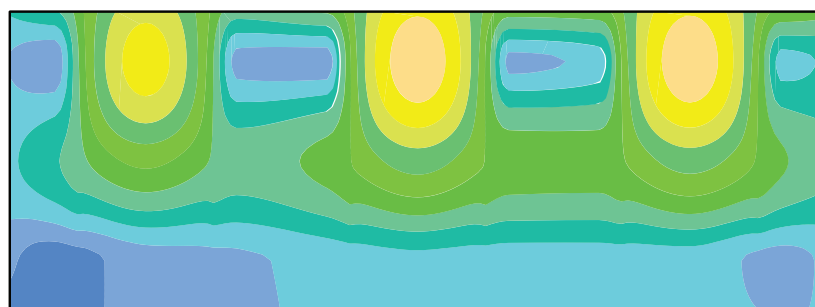

5.4 7.5 10 15 20 29 40 56 78 109 153 214 lx

ZOID



IP65

IK08
07






3
SDCM

CRI
>80

UniShield16

ZOID

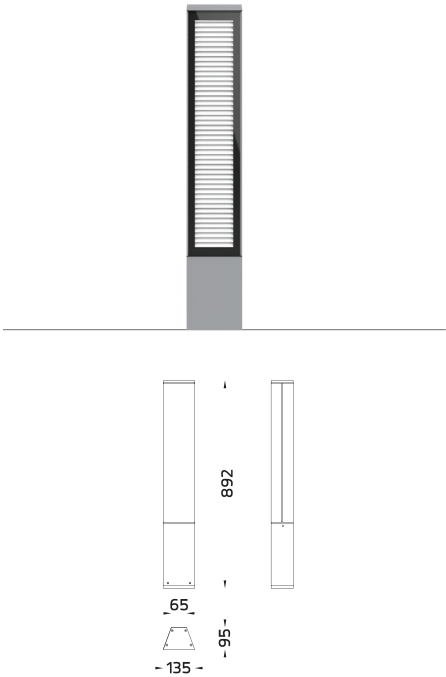

ZOID

Application Type : Bollard
Subgroup : Semi shielded bollard

ZOID / 7811	
Luminaire Performance	
	650 – 910 lm
	19 – 28 W
	31 – 34 lm/W
Beam Options	
	
Color Temperature	
	3000K/ 4000K
Controller	
	On-Off
Input Options	
	220-240Vac 50/60Hz

Accessories

Anchor bolt

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller	Ordering Code
							⏻	
ZOID	OD-7811							
		19 W	N/A	3000 K	650 lm	34 lm/W	•	7811-0-3-879-XX
		28 W	N/A	3000 K 4000 K	870 lm 910 lm	31 lm/W 32 lm/W	• •	7811-0-3-937-XX 7811-0-3-986-XX

*Please contact sales team for special request.

Typical Application



■ On-ground

BUZZ is a robust ground mounted luminaire with excellent light control with three different types of light pattern. **BUZZ** has a wide beam light distribution from a low mounting height. It is available in two sizes and operated with COB in high CRI. It provides brilliant lighting level with no glare from the above viewing angle. With the strong LM6 aluminum construction and clear polycarbonate cover, they protect the luminaire from dust and water and possible harmful impact. **BUZZ** is generally installed in the walkways and pathways in both private and public areas. It provides visual guidance in the architectural environment. Anchorage unit for concrete foundation is available as an accessory.



NEW! Mini BUZZ4



NEW! BUZZ4



www.unilamp.co.th/en/p/buzz

Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Polycarbonate protective cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.

Available Color



****Custom colors are available on request.**

Mini BUZZ



- 1. Reflector**
State of art high efficiency computer-aided design reflector.
- 2. LED Module**
COB LED directly attached to the body for fastest heat transfer. 2700K, 3000K and 4000K CRI>80 3-Step SDCM.
- 3. Body Housing**
Enhanced LM6 die-cast aluminum housing with 16-step coating process including nano ceramic film. Low copper content <0.1%
- 4. Cover.**
Self-extinguishing PC protective cover. Protect against UV rays and mechanical impact.



Courtyard by Marriott, Aravali Resort, NCR, Delhi – INDIA

BUZZ

CE

TÜV
1195-2001



IK⁰⁸₀₇ OR IK⁰⁸₁₀

IP66 OR IP67







CRI >80

3 SDCM

UniShield16

UniBlock


Mini BUZZ1

Mini BUZZ2

Mini BUZZ3

Mini BUZZ4





Ø130
157
Ø165

NEW!


BUZZ1

BUZZ2

BUZZ3

BUZZ4





Ø220
250
Ø295

NEW!

BUZZ

Application Type : On-ground

Subgroup : Ground washer

Mini BUZZ1 / 7163

Mini BUZZ2 / 7164

Mini BUZZ3 / 7165

Mini BUZZ4 / 7167

BUZZ1 / 7160

BUZZ2 / 7161

BUZZ3 / 7162

BUZZ4 / 7166

New!

New!

Luminaire Performance

500 – 2970 lm

14 – 40 W

30 – 80 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

On-Off/ 1-10V/ DALI/ CASAMBI

On-Off [AC LED]

Input Options

220-240Vac 50/60Hz

Accessories



Anchor bolt



IP68 Connector

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller					Ordering Code
											CASAMBI	
Mini BUZZ1	OD-7163	14 W	N/A	2700 K	1020 lm	72 lm/W	•					7163-0-3-503-XX 7163-0-3-901-XX 7163-0-3-904-XX
				3000 K	1080 lm	77 lm/W	•					
				4000 K	1130 lm	80 lm/W	•					
Mini BUZZ2	OD-7164	14 W	N/A	2700 K	520 lm	37 lm/W	•					7164-0-3-503-XX 7164-0-3-901-XX 7164-0-3-904-XX
				3000 K	550 lm	39 lm/W	•					
				4000 K	570 lm	40 lm/W	•					
Mini BUZZ3	OD-7165	14 W	N/A	3000 K	530 lm	37 lm/W	•					7165-0-3-901-XX
												
Mini BUZZ4	OD-7167	16 W	N/A	2700 K	500 lm	31 lm/W	•					7167-0-3-503-XX 7167-0-3-901-XX 7167-0-3-904-XX
				3000 K	530 lm	33 lm/W	•					
				4000 K	550 lm	34 lm/W	•					
				2700 K	500 lm	31 lm/W			•			7167-0-4-503-XX 7167-0-4-901-XX 7167-0-4-904-XX
				3000 K	530 lm	33 lm/W			•			
				4000 K	550 lm	34 lm/W			•			
				2700 K	500 lm	31 lm/W				•		7167-0-5-503-XX 7167-0-5-901-XX 7167-0-5-904-XX
				3000 K	530 lm	33 lm/W				•		
				4000 K	550 lm	34 lm/W				•		
				2700 K	500 lm	31 lm/W					•	7167-0-A-503-XX 7167-0-A-901-XX 7167-0-A-904-XX
				3000 K	530 lm	33 lm/W					•	
				4000 K	550 lm	34 lm/W					•	
BUZZ1	OD-7160	20 W	N/A	3000 K	1110 lm	55 lm/W		•				7160-0-3-873-XX 7160-0-3-887-XX 7160-0-3-891-XX 7160-0-3-877-XX 7160-0-3-902-XX
		27 W	N/A	3000 K	2040 lm	75 lm/W	•					
		4000 K		2100 lm	77 lm/W	•						
		30 W	N/A	3000 K	1670 lm	55 lm/W		•				
BUZZ2	OD-7161	20 W	N/A	3000 K	600 lm	30 lm/W		•				7161-0-3-873-XX 7161-0-3-887-XX 7161-0-3-891-XX 7161-0-3-902-XX
		27 W	N/A	3000 K	1100 lm	40 lm/W	•					
		40 W	N/A	2700 K	1540 lm	38 lm/W	•					
				3000 K	1610 lm	40 lm/W	•					
BUZZ3	OD-7162	27 W	N/A	3000 K	1120 lm	41 lm/W	•					7162-0-3-887-XX
BUZZ4	OD-7166	20 W	N/A	3000 K	640 lm	32 lm/W		•				7166-0-3-873-XX 7166-0-3-874-XX
				4000 K	680 lm	34 lm/W		•				
		27 W	N/A	2700 K	1130 lm	41 lm/W	•					7166-0-3-506-XX 7166-0-3-887-XX 7166-0-3-891-XX
				3000 K	1180 lm	43 lm/W	•					
				4000 K	1210 lm	44 lm/W	•					
				2700 K	1130 lm	41 lm/W			•			
				3000 K	1180 lm	43 lm/W			•			7166-0-4-506-XX 7166-0-4-887-XX 7166-0-4-891-XX
				4000 K	1210 lm	44 lm/W			•			
				2700 K	1130 lm	41 lm/W				•		
				3000 K	1180 lm	43 lm/W				•		
				4000 K	1210 lm	44 lm/W				•		7166-0-5-506-XX 7166-0-5-887-XX 7166-0-5-891-XX
				2700 K	1130 lm	41 lm/W					•	
				3000 K	1180 lm	43 lm/W					•	
				4000 K	1210 lm	44 lm/W					•	
		30 W	N/A	3000 K	960 lm	32 lm/W		•				7166-0-3-877-XX 7166-0-3-878-XX
				4000 K	1020 lm	34 lm/W		•				
		40 W	N/A	2700 K	1640 lm	41 lm/W	•					7166-0-3-505-XX 7166-0-3-902-XX 7166-0-3-905-XX
				3000 K	1720 lm	43 lm/W	•					
				4000 K	1760 lm	44 lm/W	•					
				2700 K	1640 lm	41 lm/W					•	7166-0-A-505-XX 7166-0-A-902-XX 7166-0-A-905-XX
				3000 K	1720 lm	43 lm/W					•	
				4000 K	1760 lm	44 lm/W					•	


*Please contact sales team for special request.

EQUINOX

■ POLE MOUNTED



EQUINOX is the trapezium-shaped linear light fixture for residential community, commercial area and public space. It is operated with the LED light source with high CRI and 3-step SDCM. It can be used on a pole as a pole top luminaire or with a clamping unit at different height. A wall mounted version for area light application is also available. With high quality LED in 3000K and 4000K **EQUINOX** is an economical luminaire that provides general illumination with excellent lighting levels. The exceptional lens system distributes the light efficiently onto the surfaces. Aluminum Poles, Galvanized steel poles and anchorage unit for concrete foundations are available as accessories.

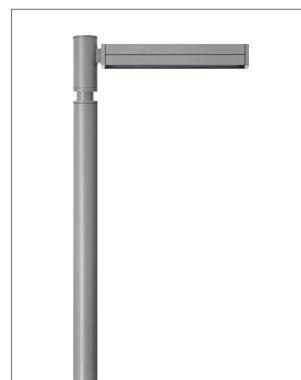

www.unilamp.co.th/en/p/equinox



Typical Application



Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum and extruded aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Molded Lens from renowned manufacturer.
- M20 cable gland/ weather proof TPE grommet.
- Installation work has to be carried out according to the enclosed product manual.

Available Color



****Custom colors are available on request.**

EQUINOX









Neo EQUINOX Clamp

Neo EQUINOX Clamp – DS

Neo EQUINOX

Neo EQUINOX – DS

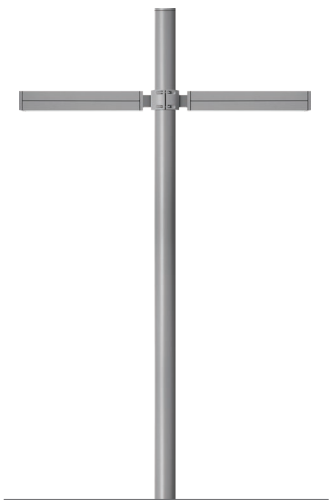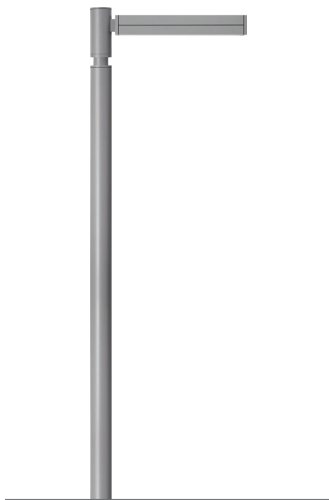

Neo EQUINOX

Application Type : Pole mounted
Subgroup : Urban ambient / Urban accent / Urban area

Neo EQUINOX Clamp / 7715
Neo EQUINOX Clamp – DS / 7716
Neo EQUINOX / 7717
Neo EQUINOX – DS / 7718

Luminaire Performance

2610 – 9880 lm
32 – 98 W
76 – 137 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

On-Off/ 1-10V/ DALI

Input Options

220-240Vac 50/60Hz

Accessories



Aluminum pole



Steel pole



Anchor bolt

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller			Ordering Code
									
OD-7715 	32 W	28°	3000 K	2980 lm	93 lm/W	•			7715-B-3-540-XX
			4000 K	3210 lm	100 lm/W	•			7715-B-3-541-XX
			3000 K	2980 lm	93 lm/W		•		7715-B-4-540-XX
			4000 K	3210 lm	100 lm/W		•		7715-B-4-541-XX
			3000 K	2980 lm	93 lm/W			•	7715-B-5-540-XX
			4000 K	3210 lm	100 lm/W			•	7715-B-5-541-XX
	32 W	80°	3000 K	2880 lm	90 lm/W	•			7715-E-3-540-XX
			4000 K	3110 lm	97 lm/W	•			7715-E-3-541-XX
			3000 K	2880 lm	90 lm/W		•		7715-E-4-540-XX
			4000 K	3110 lm	97 lm/W		•		7715-E-4-541-XX
			3000 K	2880 lm	90 lm/W			•	7715-E-5-540-XX
			4000 K	3110 lm	97 lm/W			•	7715-E-5-541-XX
	32 W	105°	2700 K	3000 lm	93 lm/W	•			7715-E-3-673-XX
			3000 K	3000 lm	93 lm/W	•			7715-E-3-674-XX
			4000 K	3200 lm	100 lm/W	•			7715-E-3-675-XX
			2700 K	3000 lm	93 lm/W		•		7715-E-4-673-XX
			3000 K	3000 lm	93 lm/W		•		7715-E-4-674-XX
			4000 K	3200 lm	100 lm/W		•		7715-E-4-675-XX
			2700 K	3000 lm	93 lm/W			•	7715-E-5-673-XX
			3000 K	3000 lm	93 lm/W			•	7715-E-5-674-XX
			4000 K	3200 lm	100 lm/W			•	7715-E-5-675-XX
	32 W	Asymmetric	2700 K	2980 lm	93 lm/W	•			7715-K-3-673-XX
			3000 K	2980 lm	93 lm/W	•			7715-K-3-674-XX
			4000 K	3180 lm	99 lm/W	•			7715-K-3-675-XX
			2700 K	2980 lm	93 lm/W		•		7715-K-4-673-XX
			3000 K	2980 lm	93 lm/W		•		7715-K-4-674-XX
			4000 K	3180 lm	99 lm/W		•		7715-K-4-675-XX
	32 W	Elliptical H	2700 K	2980 lm	93 lm/W			•	7715-K-5-673-XX
			3000 K	2980 lm	93 lm/W			•	7715-K-5-674-XX
			4000 K	3180 lm	99 lm/W			•	7715-K-5-675-XX
			2700 K	3110 lm	97 lm/W	•			7715-H-3-673-XX
			3000 K	3110 lm	97 lm/W	•			7715-H-3-674-XX
			4000 K	3330 lm	104 lm/W	•			7715-H-3-675-XX
			2700 K	3110 lm	97 lm/W		•		7715-H-4-673-XX
			3000 K	3110 lm	97 lm/W		•		7715-H-4-674-XX
			4000 K	3330 lm	104 lm/W		•		7715-H-4-675-XX
			2700 K	3110 lm	97 lm/W			•	7715-H-5-673-XX
			3000 K	3110 lm	97 lm/W			•	7715-H-5-674-XX
			4000 K	3330 lm	104 lm/W			•	7715-H-5-675-XX
	32 W	Road Optic	2700 K	2610 lm	81 lm/W	•			7715-I-3-673-XX
			3000 K	2610 lm	81 lm/W	•			7715-I-3-674-XX
			4000 K	2790 lm	87 lm/W	•			7715-I-3-675-XX
			2700 K	2610 lm	81 lm/W		•		7715-I-4-673-XX
			3000 K	2610 lm	81 lm/W		•		7715-I-4-674-XX
			4000 K	2790 lm	87 lm/W		•		7715-I-4-675-XX
			2700 K	2610 lm	81 lm/W			•	7715-I-5-673-XX
			3000 K	2610 lm	81 lm/W			•	7715-I-5-674-XX
	36 W	90°	4000 K	2790 lm	87 lm/W			•	7715-I-5-675-XX
			3000 K	4680 lm	130 lm/W	•			7715-E-3-666-XX
			4000 K	4940 lm	137 lm/W	•			7715-E-3-667-XX
			3000 K	4680 lm	130 lm/W		•		7715-E-4-666-XX
			4000 K	4940 lm	137 lm/W		•		7715-E-4-667-XX
			3000 K	4680 lm	130 lm/W			•	7715-E-5-666-XX
	36 W	Road Optic	4000 K	4940 lm	137 lm/W			•	7715-E-5-667-XX
			3000 K	4320 lm	120 lm/W	•			7715-I-3-666-XX
			4000 K	4560 lm	126 lm/W	•			7715-I-3-667-XX
			3000 K	4320 lm	120 lm/W		•		7715-I-4-666-XX
			4000 K	4560 lm	126 lm/W		•		7715-I-4-667-XX
			3000 K	4320 lm	120 lm/W			•	7715-I-5-666-XX
	49 W	105°	4000 K	4560 lm	126 lm/W			•	7715-I-5-667-XX
			2700 K	4320 lm	88 lm/W	•			7715-E-3-670-XX
			3000 K	4320 lm	88 lm/W	•			7715-E-3-671-XX
			4000 K	4620 lm	94 lm/W	•			7715-E-3-672-XX
			2700 K	4320 lm	88 lm/W		•		7715-E-4-670-XX
			3000 K	4320 lm	88 lm/W		•		7715-E-4-671-XX
			4000 K	4620 lm	94 lm/W		•		7715-E-4-672-XX
			2700 K	4320 lm	88 lm/W			•	7715-E-5-670-XX
	49 W	Asymmetric	3000 K	4320 lm	88 lm/W			•	7715-E-5-671-XX
			4000 K	4620 lm	94 lm/W			•	7715-E-5-672-XX
			2700 K	4300 lm	87 lm/W	•			7715-K-3-670-XX
			3000 K	4300 lm	87 lm/W	•			7715-K-3-671-XX
			4000 K	4600 lm	93 lm/W	•			7715-K-3-672-XX
			2700 K	4300 lm	87 lm/W		•		7715-K-4-670-XX
			3000 K	4300 lm	87 lm/W		•		7715-K-4-671-XX
			4000 K	4600 lm	93 lm/W		•		7715-K-4-672-XX
	49 W	Elliptical H	2700 K	4300 lm	87 lm/W			•	7715-K-5-670-XX
			3000 K	4300 lm	87 lm/W			•	7715-K-5-671-XX
			4000 K	4600 lm	93 lm/W			•	7715-K-5-672-XX
			2700 K	4490 lm	91 lm/W	•			7715-H-3-670-XX
			3000 K	4490 lm	91 lm/W	•			7715-H-3-671-XX
			4000 K	4810 lm	98 lm/W	•			7715-H-3-672-XX
	49 W	Elliptical H	2700 K	4490 lm	91 lm/W		•		7715-H-4-670-XX
			3000 K	4490 lm	91 lm/W		•		7715-H-4-671-XX
			4000 K	4810 lm	98 lm/W		•		7715-H-4-672-XX
			2700 K	4490 lm	91 lm/W			•	7715-H-4-673-XX

*Please contact sales team for special request.

Neo EQUINOX Clamp

Neo EQUINOX Clamp – DS

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller			Ordering Code
									
OD-7715 	49 W	Elliptical H	2700 K	4490 lm	91 lm/W			•	7715-H-5-670-XX
			3000 K	4490 lm	91 lm/W			•	7715-H-5-671-XX
			4000 K	4810 lm	98 lm/W			•	7715-H-5-672-XX
	49 W	Road Optic	2700 K	3770 lm	76 lm/W	•			7715-l-3-670-XX
			3000 K	3770 lm	76 lm/W	•			7715-l-3-671-XX
			4000 K	4030 lm	82 lm/W	•			7715-l-3-672-XX
			2700 K	3770 lm	76 lm/W		•		7715-l-4-670-XX
			3000 K	3770 lm	76 lm/W		•		7715-l-4-671-XX
			4000 K	4030 lm	82 lm/W		•		7715-l-4-672-XX
			2700 K	3770 lm	76 lm/W			•	7715-l-5-670-XX
			3000 K	3770 lm	76 lm/W			•	7715-l-5-671-XX
			4000 K	4030 lm	82 lm/W			•	7715-l-5-672-XX
OD-7716 	64 W	28°	3000 K	5960 lm	93 lm/W	•			7716-B-3-540-XX
			4000 K	6420 lm	100 lm/W	•			7716-B-3-541-XX
			3000 K	5960 lm	93 lm/W		•		7716-B-4-540-XX
			4000 K	6420 lm	100 lm/W		•		7716-B-4-541-XX
	64 W	80°	3000 K	5960 lm	93 lm/W			•	7716-B-5-540-XX
			4000 K	6420 lm	100 lm/W			•	7716-B-5-541-XX
			3000 K	5760 lm	90 lm/W	•			7716-E-3-540-XX
			4000 K	6220 lm	97 lm/W	•			7716-E-3-541-XX
			3000 K	5760 lm	90 lm/W		•		7716-E-4-540-XX
			4000 K	6220 lm	97 lm/W		•		7716-E-4-541-XX
			3000 K	5760 lm	90 lm/W			•	7716-E-5-540-XX
			4000 K	6220 lm	97 lm/W			•	7716-E-5-541-XX
	64 W	105°	2700 K	6000 lm	93 lm/W	•			7716-E-3-673-XX
			3000 K	6000 lm	93 lm/W	•			7716-E-3-674-XX
			4000 K	6400 lm	100 lm/W	•			7716-E-3-675-XX
			2700 K	6000 lm	93 lm/W		•		7716-E-4-673-XX
			3000 K	6000 lm	93 lm/W		•		7716-E-4-674-XX
			4000 K	6400 lm	100 lm/W		•		7716-E-4-675-XX
			2700 K	6000 lm	93 lm/W			•	7716-E-5-673-XX
			3000 K	6000 lm	93 lm/W			•	7716-E-5-674-XX
			4000 K	6400 lm	100 lm/W			•	7716-E-5-675-XX
	64 W	Asymmetric	2700 K	5960 lm	93 lm/W	•			7716-K-3-673-XX
			3000 K	5960 lm	93 lm/W	•			7716-K-3-674-XX
			4000 K	6360 lm	99 lm/W	•			7716-K-3-675-XX
			2700 K	5960 lm	93 lm/W		•		7716-K-4-673-XX
			3000 K	5960 lm	93 lm/W		•		7716-K-4-674-XX
			4000 K	6360 lm	99 lm/W		•		7716-K-4-675-XX
			2700 K	5960 lm	93 lm/W			•	7716-K-5-673-XX
			3000 K	5960 lm	93 lm/W			•	7716-K-5-674-XX
			4000 K	6360 lm	99 lm/W			•	7716-K-5-675-XX
	64 W	Elliptical H	2700 K	6220 lm	97 lm/W	•			7716-H-3-673-XX
			3000 K	6220 lm	97 lm/W	•			7716-H-3-674-XX
			4000 K	6660 lm	104 lm/W	•			7716-H-3-675-XX
			2700 K	6220 lm	97 lm/W		•		7716-H-4-673-XX
			3000 K	6220 lm	97 lm/W		•		7716-H-4-674-XX
			4000 K	6660 lm	104 lm/W		•		7716-H-4-675-XX
			2700 K	6220 lm	97 lm/W			•	7716-H-5-673-XX
			3000 K	6220 lm	97 lm/W			•	7716-H-5-674-XX
			4000 K	6660 lm	104 lm/W			•	7716-H-5-675-XX
	64 W	Road Optic	2700 K	5220 lm	81 lm/W	•			7716-l-3-673-XX
			3000 K	5220 lm	81 lm/W	•			7716-l-3-674-XX
			4000 K	5580 lm	87 lm/W	•			7716-l-3-675-XX
			2700 K	5220 lm	81 lm/W		•		7716-l-4-673-XX
			3000 K	5220 lm	81 lm/W		•		7716-l-4-674-XX
			4000 K	5580 lm	87 lm/W		•		7716-l-4-675-XX
			2700 K	5220 lm	81 lm/W			•	7716-l-5-673-XX
			3000 K	5220 lm	81 lm/W			•	7716-l-5-674-XX
			4000 K	5580 lm	87 lm/W			•	7716-l-5-675-XX
	72 W	90°	3000 K	9360 lm	130 lm/W	•			7716-E-3-666-XX
			4000 K	9880 lm	137 lm/W	•			7716-E-3-667-XX
			3000 K	9360 lm	130 lm/W		•		7716-E-4-666-XX
			4000 K	9880 lm	137 lm/W		•		7716-E-4-667-XX
	72 W	Road Optic	3000 K	9360 lm	130 lm/W			•	7716-E-5-666-XX
			4000 K	9880 lm	137 lm/W			•	7716-E-5-667-XX
			3000 K	8640 lm	120 lm/W	•			7716-l-3-666-XX
			4000 K	9120 lm	126 lm/W	•			7716-l-3-667-XX
			3000 K	8640 lm	120 lm/W		•		7716-l-4-666-XX
			4000 K	9120 lm	126 lm/W		•		7716-l-4-667-XX
			3000 K	8640 lm	120 lm/W			•	7716-l-5-666-XX
			4000 K	9120 lm	126 lm/W			•	7716-l-5-667-XX
	98 W	105°	2700 K	8640 lm	88 lm/W	•			7716-E-3-670-XX
			3000 K	8640 lm	88 lm/W	•			7716-E-3-671-XX
			4000 K	9240 lm	94 lm/W	•			7716-E-3-672-XX
			2700 K	8640 lm	88 lm/W		•		7716-E-4-670-XX
			3000 K	8640 lm	88 lm/W		•		7716-E-4-671-XX
			4000 K	9240 lm	94 lm/W		•		7716-E-4-672-XX
			2700 K	8640 lm	88 lm/W			•	7716-E-5-670-XX
			3000 K	8640 lm	88 lm/W			•	7716-E-5-671-XX
			4000 K	9240 lm	94 lm/W			•	7716-E-5-672-XX

Neo EQUINOX Clamp - DS

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller			Ordering Code
									
OD-7716 	98 W	Asymmetric	2700 K	8600 lm	87 lm/W	•			7716-K-3-670-XX
			3000 K	8600 lm	87 lm/W	•			7716-K-3-671-XX
			4000 K	9200 lm	93 lm/W	•			7716-K-3-672-XX
			2700 K	8600 lm	87 lm/W		•		7716-K-4-670-XX
			3000 K	8600 lm	87 lm/W		•		7716-K-4-671-XX
			4000 K	9200 lm	93 lm/W		•		7716-K-4-672-XX
		Elliptical H	2700 K	8600 lm	87 lm/W			•	7716-K-5-670-XX
			3000 K	8600 lm	87 lm/W			•	7716-K-5-671-XX
			4000 K	9200 lm	93 lm/W			•	7716-K-5-672-XX
			2700 K	8980 lm	91 lm/W	•			7716-H-3-670-XX
			3000 K	8980 lm	91 lm/W	•			7716-H-3-671-XX
			4000 K	9620 lm	98 lm/W	•			7716-H-3-672-XX
	98 W	Elliptical H	2700 K	8980 lm	91 lm/W		•		7716-H-4-670-XX
			3000 K	8980 lm	91 lm/W		•		7716-H-4-671-XX
			4000 K	9620 lm	98 lm/W		•		7716-H-4-672-XX
			2700 K	8980 lm	91 lm/W			•	7716-H-5-670-XX
			3000 K	8980 lm	91 lm/W			•	7716-H-5-671-XX
			4000 K	9620 lm	98 lm/W			•	7716-H-5-672-XX
	98 W	Road Optic	2700 K	7540 lm	76 lm/W	•			7716-I-3-670-XX
			3000 K	7540 lm	76 lm/W	•			7716-I-3-671-XX
			4000 K	8060 lm	82 lm/W	•			7716-I-3-672-XX
			2700 K	7540 lm	76 lm/W		•		7716-I-4-670-XX
			3000 K	7540 lm	76 lm/W		•		7716-I-4-671-XX
			4000 K	8060 lm	82 lm/W		•		7716-I-4-672-XX
			2700 K	7540 lm	76 lm/W			•	7716-I-5-670-XX
			3000 K	7540 lm	76 lm/W			•	7716-I-5-671-XX
			4000 K	8060 lm	82 lm/W			•	7716-I-5-672-XX
OD-7717 	32 W	28°	3000 K	2980 lm	93 lm/W	•			7717-B-3-540-XX
			4000 K	3210 lm	100 lm/W	•			7717-B-3-541-XX
			3000 K	2980 lm	93 lm/W		•		7717-B-4-540-XX
			4000 K	3210 lm	100 lm/W		•		7717-B-4-541-XX
			3000 K	2980 lm	93 lm/W			•	7717-B-5-540-XX
			4000 K	3210 lm	100 lm/W			•	7717-B-5-541-XX
	32 W	80°	3000 K	2880 lm	90 lm/W	•			7717-E-3-540-XX
			4000 K	3110 lm	97 lm/W	•			7717-E-3-541-XX
			3000 K	2880 lm	90 lm/W		•		7717-E-4-540-XX
			4000 K	3110 lm	97 lm/W		•		7717-E-4-541-XX
			3000 K	2880 lm	90 lm/W			•	7717-E-5-540-XX
			4000 K	3110 lm	97 lm/W			•	7717-E-5-541-XX
	32 W	105°	2700 K	3000 lm	93 lm/W	•			7717-E-3-673-XX
			3000 K	3000 lm	93 lm/W	•			7717-E-3-674-XX
			4000 K	3200 lm	100 lm/W	•			7717-E-3-675-XX
			2700 K	3000 lm	93 lm/W		•		7717-E-4-673-XX
			3000 K	3000 lm	93 lm/W		•		7717-E-4-674-XX
			4000 K	3200 lm	100 lm/W		•		7717-E-4-675-XX
			2700 K	3000 lm	93 lm/W			•	7717-E-5-673-XX
			3000 K	3000 lm	93 lm/W			•	7717-E-5-674-XX
			4000 K	3200 lm	100 lm/W			•	7717-E-5-675-XX
	32 W	Asymmetric	2700 K	2980 lm	93 lm/W	•			7717-K-3-673-XX
			3000 K	2980 lm	93 lm/W	•			7717-K-3-674-XX
			4000 K	3180 lm	99 lm/W	•			7717-K-3-675-XX
			2700 K	2980 lm	93 lm/W		•		7717-K-4-673-XX
			3000 K	2980 lm	93 lm/W		•		7717-K-4-674-XX
			4000 K	3180 lm	99 lm/W		•		7717-K-4-675-XX
	32 W	Elliptical H	2700 K	2980 lm	93 lm/W			•	7717-K-5-673-XX
			3000 K	2980 lm	93 lm/W			•	7717-K-5-674-XX
			4000 K	3180 lm	99 lm/W			•	7717-K-5-675-XX
			2700 K	3110 lm	97 lm/W	•			7717-H-3-673-XX
			3000 K	3110 lm	97 lm/W	•			7717-H-3-674-XX
			4000 K	3330 lm	104 lm/W	•			7717-H-3-675-XX
			2700 K	3110 lm	97 lm/W		•		7717-H-4-673-XX
			3000 K	3110 lm	97 lm/W		•		7717-H-4-674-XX
			4000 K	3330 lm	104 lm/W		•		7717-H-4-675-XX
	32 W	Road Optic	2700 K	3110 lm	97 lm/W			•	7717-H-5-673-XX
			3000 K	3110 lm	97 lm/W			•	7717-H-5-674-XX
			4000 K	3330 lm	104 lm/W			•	7717-H-5-675-XX
			2700 K	2610 lm	81 lm/W	•			7717-I-3-673-XX
			3000 K	2610 lm	81 lm/W	•			7717-I-3-674-XX
			4000 K	2790 lm	87 lm/W	•			7717-I-3-675-XX
			2700 K	2610 lm	81 lm/W		•		7717-I-4-673-XX
			3000 K	2610 lm	81 lm/W		•		7717-I-4-674-XX
			4000 K	2790 lm	87 lm/W		•		7717-I-4-675-XX
	32 W	Road Optic	2700 K	2610 lm	81 lm/W			•	7717-I-5-673-XX
			3000 K	2610 lm	81 lm/W			•	7717-I-5-674-XX
			4000 K	2790 lm	87 lm/W			•	7717-I-5-675-XX
	36 W	Road Optic	3000 K	4320 lm	120 lm/W	•			7717-I-3-666-XX
			4000 K	4560 lm	126 lm/W	•			7717-I-3-667-XX
			3000 K	4320 lm	120 lm/W		•		7717-I-4-666-XX
			4000 K	4560 lm	126 lm/W		•		7717-I-4-667-XX
			3000 K	4320 lm	120 lm/W			•	7717-I-5-666-XX
			4000 K	4560 lm	126 lm/W			•	7717-I-5-667-XX

Neo EQUINOX

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller			Ordering Code
									
OD-7717 	36 W	90°	3000 K	4680 lm	130 lm/W	•			7717-E-3-666-XX
			4000 K	4940 lm	137 lm/W	•			7717-E-3-667-XX
			3000 K	4680 lm	130 lm/W		•		7717-E-4-666-XX
			4000 K	4940 lm	137 lm/W		•		7717-E-4-667-XX
			3000 K	4680 lm	130 lm/W			•	7717-E-5-666-XX
			4000 K	4940 lm	137 lm/W			•	7717-E-5-667-XX
	49 W	105°	2700 K	4320 lm	88 lm/W	•			7717-E-3-670-XX
			3000 K	4320 lm	88 lm/W	•			7717-E-3-671-XX
			4000 K	4620 lm	94 lm/W	•			7717-E-3-672-XX
			2700 K	4320 lm	88 lm/W		•		7717-E-4-670-XX
			3000 K	4320 lm	88 lm/W		•		7717-E-4-671-XX
			4000 K	4620 lm	94 lm/W		•		7717-E-4-672-XX
			2700 K	4320 lm	88 lm/W			•	7717-E-5-670-XX
			3000 K	4320 lm	88 lm/W			•	7717-E-5-671-XX
			4000 K	4620 lm	94 lm/W			•	7717-E-5-672-XX
			2700 K	4300 lm	87 lm/W	•			7717-K-3-670-XX
			3000 K	4300 lm	87 lm/W	•			7717-K-3-671-XX
			4000 K	4600 lm	93 lm/W	•			7717-K-3-672-XX
	49 W	Asymmetric	2700 K	4300 lm	87 lm/W		•		7717-K-4-670-XX
			3000 K	4300 lm	87 lm/W		•		7717-K-4-671-XX
			4000 K	4600 lm	93 lm/W		•		7717-K-4-672-XX
			2700 K	4300 lm	87 lm/W			•	7717-K-5-670-XX
			3000 K	4300 lm	87 lm/W			•	7717-K-5-671-XX
			4000 K	4600 lm	93 lm/W			•	7717-K-5-672-XX
			2700 K	4490 lm	91 lm/W	•			7717-H-3-670-XX
			3000 K	4490 lm	91 lm/W	•			7717-H-3-671-XX
			4000 K	4810 lm	98 lm/W	•			7717-H-3-672-XX
			2700 K	4490 lm	91 lm/W		•		7717-H-4-670-XX
			3000 K	4490 lm	91 lm/W		•		7717-H-4-671-XX
			4000 K	4810 lm	98 lm/W		•		7717-H-4-672-XX
	49 W	Elliptical H	2700 K	4490 lm	91 lm/W			•	7717-H-5-670-XX
			3000 K	4490 lm	91 lm/W			•	7717-H-5-671-XX
			4000 K	4810 lm	98 lm/W			•	7717-H-5-672-XX
			2700 K	3770 lm	76 lm/W	•			7717-I-3-670-XX
			3000 K	3770 lm	76 lm/W	•			7717-I-3-671-XX
			4000 K	4030 lm	82 lm/W	•			7717-I-3-672-XX
	49 W	Road Optic	2700 K	3770 lm	76 lm/W		•		7717-I-4-670-XX
			3000 K	3770 lm	76 lm/W		•		7717-I-4-671-XX
			4000 K	4030 lm	82 lm/W		•		7717-I-4-672-XX
			2700 K	3770 lm	76 lm/W			•	7717-I-5-670-XX
			3000 K	3770 lm	76 lm/W			•	7717-I-5-671-XX
			4000 K	4030 lm	82 lm/W			•	7717-I-5-672-XX

Neo EQUINOX – D5

OD-7718 	64 W	28°	3000 K	5960 lm	93 lm/W	•			7718-B-3-540-XX
			4000 K	6420 lm	100 lm/W	•			7718-B-3-541-XX
			3000 K	5960 lm	93 lm/W		•		7718-B-4-540-XX
			4000 K	6420 lm	100 lm/W		•		7718-B-4-541-XX
			3000 K	5960 lm	93 lm/W			•	7718-B-5-540-XX
			4000 K	6420 lm	100 lm/W			•	7718-B-5-541-XX
	64 W	80°	3000 K	5760 lm	90 lm/W	•			7718-E-3-540-XX
			4000 K	6220 lm	97 lm/W	•			7718-E-3-541-XX
			3000 K	5760 lm	90 lm/W		•		7718-E-4-540-XX
			4000 K	6220 lm	97 lm/W		•		7718-E-4-541-XX
			3000 K	5760 lm	90 lm/W			•	7718-E-5-540-XX
			4000 K	6220 lm	97 lm/W			•	7718-E-5-541-XX
			2700 K	6000 lm	93 lm/W	•			7718-E-3-673-XX
			3000 K	6000 lm	93 lm/W	•			7718-E-3-674-XX
			4000 K	6400 lm	100 lm/W	•			7718-E-3-675-XX
			2700 K	6000 lm	93 lm/W		•		7718-E-4-673-XX
			3000 K	6000 lm	93 lm/W		•		7718-E-4-674-XX
			4000 K	6400 lm	100 lm/W		•		7718-E-4-675-XX
	64 W	105°	2700 K	6000 lm	93 lm/W			•	7718-E-5-673-XX
			3000 K	6000 lm	93 lm/W			•	7718-E-5-674-XX
			4000 K	6400 lm	100 lm/W			•	7718-E-5-675-XX
			2700 K	5960 lm	93 lm/W	•			7718-K-3-673-XX
			3000 K	5960 lm	93 lm/W	•			7718-K-3-674-XX
			4000 K	6360 lm	99 lm/W	•			7718-K-3-675-XX
			2700 K	5960 lm	93 lm/W		•		7718-K-4-673-XX
			3000 K	5960 lm	93 lm/W		•		7718-K-4-674-XX
			4000 K	6360 lm	99 lm/W		•		7718-K-4-675-XX
			2700 K	5960 lm	93 lm/W			•	7718-K-5-673-XX
			3000 K	5960 lm	93 lm/W			•	7718-K-5-674-XX
			4000 K	6360 lm	99 lm/W			•	7718-K-5-675-XX


Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller			Ordering Code
									
OD-7718 	64 W	Elliptical H	2700 K	6220 lm	97 lm/W	•			7718-H-3-673-XX
			3000 K	6220 lm	97 lm/W	•			7718-H-3-674-XX
			4000 K	6660 lm	104 lm/W	•			7718-H-3-675-XX
			2700 K	6220 lm	97 lm/W		•		7718-H-4-673-XX
			3000 K	6220 lm	97 lm/W		•		7718-H-4-674-XX
			4000 K	6660 lm	104 lm/W		•		7718-H-4-675-XX
			2700 K	6220 lm	97 lm/W			•	7718-H-5-673-XX
			3000 K	6220 lm	97 lm/W			•	7718-H-5-674-XX
			4000 K	6660 lm	104 lm/W			•	7718-H-5-675-XX
			2700 K	5220 lm	81 lm/W	•			7718-I-3-673-XX
			3000 K	5220 lm	81 lm/W	•			7718-I-3-674-XX
			4000 K	5580 lm	87 lm/W	•			7718-I-3-675-XX
	64 W	Road Optic	2700 K	5220 lm	81 lm/W		•		7718-I-4-673-XX
			3000 K	5220 lm	81 lm/W		•		7718-I-4-674-XX
			4000 K	5580 lm	87 lm/W		•		7718-I-4-675-XX
			2700 K	5220 lm	81 lm/W			•	7718-I-5-673-XX
			3000 K	5220 lm	81 lm/W			•	7718-I-5-674-XX
			4000 K	5580 lm	87 lm/W			•	7718-I-5-675-XX
			3000 K	9360 lm	130 lm/W	•			7718-E-3-666-XX
			4000 K	9880 lm	137 lm/W	•			7718-E-3-667-XX
			3000 K	9360 lm	130 lm/W		•		7718-E-4-666-XX
			4000 K	9880 lm	137 lm/W		•		7718-E-4-667-XX
			3000 K	9360 lm	130 lm/W			•	7718-E-5-666-XX
			4000 K	9880 lm	137 lm/W			•	7718-E-5-667-XX
	72 W	90°	3000 K	8640 lm	120 lm/W	•			7718-I-3-666-XX
			4000 K	9120 lm	126 lm/W	•			7718-I-3-667-XX
			3000 K	8640 lm	120 lm/W		•		7718-I-4-666-XX
			4000 K	9120 lm	126 lm/W		•		7718-I-4-667-XX
			3000 K	8640 lm	120 lm/W			•	7718-I-5-666-XX
			4000 K	9120 lm	126 lm/W			•	7718-I-5-667-XX
			2700 K	8640 lm	88 lm/W	•			7718-E-3-670-XX
			3000 K	8640 lm	88 lm/W	•			7718-E-3-671-XX
			4000 K	9240 lm	94 lm/W	•			7718-E-3-672-XX
			2700 K	8640 lm	88 lm/W		•		7718-E-4-670-XX
			3000 K	8640 lm	88 lm/W		•		7718-E-4-671-XX
			4000 K	9240 lm	94 lm/W		•		7718-E-4-672-XX
	98 W	105°	2700 K	8640 lm	88 lm/W			•	7718-E-5-670-XX
			3000 K	8640 lm	88 lm/W			•	7718-E-5-671-XX
			4000 K	9240 lm	94 lm/W			•	7718-E-5-672-XX
			2700 K	8600 lm	87 lm/W	•			7718-K-3-670-XX
			3000 K	8600 lm	87 lm/W	•			7718-K-3-671-XX
			4000 K	9200 lm	93 lm/W	•			7718-K-3-672-XX
			2700 K	8600 lm	87 lm/W		•		7718-K-4-670-XX
			3000 K	8600 lm	87 lm/W		•		7718-K-4-671-XX
			4000 K	9200 lm	93 lm/W		•		7718-K-4-672-XX
			2700 K	8600 lm	87 lm/W			•	7718-K-5-670-XX
			3000 K	8600 lm	87 lm/W			•	7718-K-5-671-XX
			4000 K	9200 lm	93 lm/W			•	7718-K-5-672-XX
	98 W	Asymmetric	2700 K	8980 lm	91 lm/W	•			7718-H-3-670-XX
			3000 K	8980 lm	91 lm/W	•			7718-H-3-671-XX
			4000 K	9620 lm	98 lm/W	•			7718-H-3-672-XX
			2700 K	8980 lm	91 lm/W		•		7718-H-4-670-XX
			3000 K	8980 lm	91 lm/W		•		7718-H-4-671-XX
			4000 K	9620 lm	98 lm/W		•		7718-H-4-672-XX
			2700 K	8980 lm	91 lm/W			•	7718-H-5-670-XX
			3000 K	8980 lm	91 lm/W			•	7718-H-5-671-XX
			4000 K	9620 lm	98 lm/W			•	7718-H-5-672-XX
			2700 K	7540 lm	76 lm/W	•			7718-I-3-670-XX
			3000 K	7540 lm	76 lm/W	•			7718-I-3-671-XX
			4000 K	8060 lm	82 lm/W	•			7718-I-3-672-XX
	98 W	Road Optic	2700 K	7540 lm	76 lm/W		•		7718-I-4-670-XX
			3000 K	7540 lm	76 lm/W		•		7718-I-4-671-XX
			4000 K	8060 lm	82 lm/W		•		7718-I-4-672-XX
			2700 K	7540 lm	76 lm/W			•	7718-I-5-670-XX
			3000 K	7540 lm	76 lm/W			•	7718-I-5-671-XX
			4000 K	8060 lm	82 lm/W			•	7718-I-5-672-XX

NEW Release KORNER

■ POLE MOUNTED

KORNER is minimalistic linear shaped pole luminaire and wall light. The use of clear lines, closed surfaces and hidden mounting hardware provide an attractive unobtrusive appearance, and easy installation. The unique 16 stage paint process and use of virtually copper free aluminum alloys guarantee an ultra-long product lifetime. **KORNER** is suitable for medium mounting heights when using aluminum poles and high mounting heights of up to 8m in combination of steel poles. Existing circular poles can be utilized with the use of the innovative clamping system.

KORNER uses high efficacy LED modules and CAD optimized optics. Ready for light management systems using the D4i protocol and Zhaga book 18 interface. Withstanding ambient temperatures of 50°C and electrical surges make **KORNER** applicable for most challenging environments.

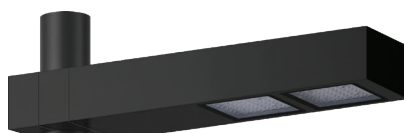

www.unilamp.co.th/en/p/korner

Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum and extruded. Aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Weather proof TPE grommet.
- Installation must be carried out according to the enclosed product manual.

Available Color



****Custom colors are available on request.**



* Pole is not included and has to be ordered separately

• MODULAR SOLUTIONS



Accessory		KORNER – Pole Top Light		KORNER – Pole Clamp	KORNER – Wall Mouth
	IP68 Water Tight Connecting Device Cable Diameter 7 – 12mm.	•	•	•	•
	IP68 Water Tight Connecting Device, 3 Pole, Cable Diameter 7.0 – 11.5mm.	•	•	•	•
	IP68 Water Tight Connecting Device 5 Pole, Cable Diameter 8 – 12.5mm. [1–10V or DALI]	•	•	•	•
	IP68 Water Tight Connecting Device, 3 Pole, Cable Diameter 5.0 – 9.5mm	•	•	•	•
	IP68 Water Tight Connecting Device 5 Pole, Cable Diameter 7.1 – 13mm. [1–10V or Dali]	•	•	•	•
	IP68 Water Tight Connecting Device with Distribution block, 3 pole, 1 input, 2 outputs, Cable Diameter 5.0 – 9.5mm.	•	•	•	–
	IP68 Water Tight Connecting Device with Distribution block, 5 pole, 1 input, 2 outputs, Cable Diameter 7.1 – 13mm. [1–10V or Dali]	•	•	•	–
	Anchor Bolt Kit for Aluminum Pole.	•	–	–	–
	Anchor Bolt Kit for Galvanized Steel Pole. [for Diameter 102mm. and 151x102mm.]	•	–	–	–
	Planted Root	–	•	–	–
	Aluminum Pole Clamp Diameter 60/76 mm.	–	–	•	–
	Wall Adapter	–	–	–	•
	Hot-Dipped Galvanized Steel Pole 151x102mm. Height 6000/7000/8000 mm. with Flange Base / with Internal Anchorage Unit	•	•	–	–
	Extruded Aluminum Pole 150x82mm. Height 4500mm. with Flange Base / with Internal Anchorage Unit	•	•	–	–
	Aluminum Pole Diameter 60/76 mm.	–	–	•	–




• MODULAR SOLUTIONS


■ KORNER + Accessory kit for Pole Mount Solutions



**Please see Poles & Anchor bolt section for pole mounting options*

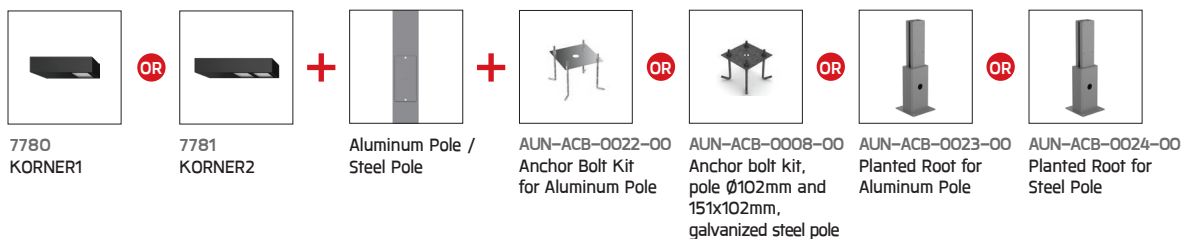

**Please see Poles & Anchor bolt section for pole mounting options*

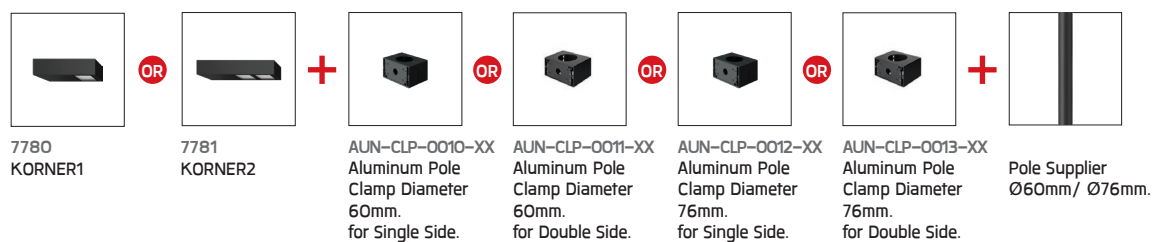

• MODULAR SOLUTIONS

■ **KORNER** + Accessory kit
for Wall Mount Solutions




7780
KORNER1

OR



7781
KORNER2

+




AUN-CLP-0010-XX
Aluminum Pole
Clamp Diameter
60mm.
for Single Side.

OR



AUN-CLP-0011-XX
Aluminum Pole
Clamp Diameter
60mm.
for Double Side.

OR



AUN-CLP-0012-XX
Aluminum Pole
Clamp Diameter
76mm.
for Single Side.

OR





AUN-CLP-0013-XX
Aluminum Pole
Clamp Diameter
76mm.
for Double Side.





KORNER



KORNER1

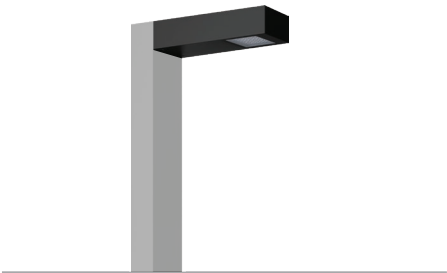

KORNER2

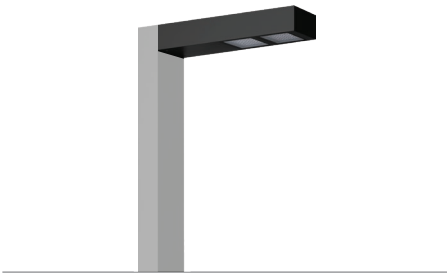

KORNER

NEW!

Application Type : Pole mounted
Subgroup : Urban area/ Urban ambient

KORNER1 / 7780	
KORNER2 / 7781	
Luminaire Performance	
2240 – 8340 lm	
27 – 70 W	
79 – 124 lm/W	
Beam Options	
Color Temperature	
3000K/ 4000K	
Controller	
On-Off/ 1-10V/ DALI/ CASAMBI	
Input Options	
220-240Vac 50/60Hz	

Accessories			
	Aluminum pole		Steel pole
	Anchor bolt		Planted Root
	IP68 Connector		Distribution box
	Wall Adapter		Pole Clamp

KORNER 1

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code
									CASAMBI	
OD-7780 	27 W	T1	3000 K	2840 lm	105 lm/W	•				7780-U-3-666-XX
			4000 K	2980 lm	110 lm/W	•				7780-U-3-667-XX
			3000 K	2840 lm	105 lm/W		•			7780-U-4-666-XX
			4000 K	2980 lm	110 lm/W		•			7780-U-4-667-XX
			3000 K	2840 lm	105 lm/W			•		7780-U-5-666-XX
			4000 K	2980 lm	110 lm/W			•		7780-U-5-667-XX
			3000 K	2840 lm	105 lm/W				•	7780-U-A-666-XX
			4000 K	2980 lm	110 lm/W				•	7780-U-A-667-XX
	27 W	T2	3000 K	2890 lm	107 lm/W	•				7780-I-3-666-XX
			4000 K	3040 lm	112 lm/W	•				7780-I-3-667-XX
			3000 K	2610 lm	96 lm/W	•				7780-R-3-666-XX
			4000 K	2740 lm	101 lm/W	•				7780-R-3-667-XX
			3000 K	2890 lm	107 lm/W		•			7780-I-4-666-XX
			4000 K	3040 lm	112 lm/W		•			7780-I-4-667-XX
			3000 K	2610 lm	96 lm/W		•			7780-R-4-666-XX
			4000 K	2740 lm	101 lm/W		•			7780-R-4-667-XX
		T3	3000 K	2890 lm	107 lm/W			•		7780-I-5-666-XX
			4000 K	3040 lm	112 lm/W			•		7780-I-5-667-XX
			3000 K	2610 lm	96 lm/W			•		7780-R-5-666-XX
			4000 K	2740 lm	101 lm/W			•		7780-R-5-667-XX
			3000 K	2890 lm	107 lm/W				•	7780-I-A-666-XX
			4000 K	3040 lm	112 lm/W				•	7780-I-A-667-XX
			3000 K	2610 lm	96 lm/W				•	7780-R-A-666-XX
			4000 K	2740 lm	101 lm/W				•	7780-R-A-667-XX
	27 W	T4	3000 K	2730 lm	101 lm/W	•				7780-J-3-666-XX
			4000 K	2870 lm	106 lm/W	•				7780-J-3-667-XX
			3000 K	3090 lm	114 lm/W	•				7780-S-3-666-XX
			4000 K	3250 lm	120 lm/W	•				7780-S-3-667-XX
			3000 K	2730 lm	101 lm/W		•			7780-J-4-666-XX
			4000 K	2870 lm	106 lm/W		•			7780-J-4-667-XX
			3000 K	3090 lm	114 lm/W		•			7780-S-4-666-XX
			4000 K	3250 lm	120 lm/W		•			7780-S-4-667-XX
		T5	3000 K	2730 lm	101 lm/W			•		7780-J-5-666-XX
			4000 K	2870 lm	106 lm/W			•		7780-J-5-667-XX
			3000 K	3090 lm	114 lm/W			•		7780-S-5-666-XX
			4000 K	3250 lm	120 lm/W			•		7780-S-5-667-XX
			3000 K	2730 lm	101 lm/W				•	7780-J-A-666-XX
			4000 K	2870 lm	106 lm/W				•	7780-J-A-667-XX
			3000 K	3090 lm	114 lm/W				•	7780-S-A-666-XX
			4000 K	3250 lm	120 lm/W				•	7780-S-A-667-XX
	27 W	T6	3000 K	2470 lm	91 lm/W	•				7780-K-3-666-XX
			4000 K	2590 lm	95 lm/W	•				7780-K-3-667-XX
			3000 K	2470 lm	91 lm/W		•			7780-K-4-666-XX
			4000 K	2590 lm	95 lm/W		•			7780-K-4-667-XX
			3000 K	2470 lm	91 lm/W			•		7780-K-5-666-XX
			4000 K	2590 lm	95 lm/W			•		7780-K-5-667-XX
			3000 K	2470 lm	91 lm/W				•	7780-K-A-666-XX
			4000 K	2590 lm	95 lm/W				•	7780-K-A-667-XX
	27 W	T7	3000 K	3190 lm	118 lm/W	•				7780-M-3-666-XX
			4000 K	3350 lm	124 lm/W	•				7780-M-3-667-XX
			3000 K	2240 lm	82 lm/W	•				7780-Y-3-666-XX
			4000 K	2350 lm	87 lm/W	•				7780-Y-3-667-XX
			3000 K	3190 lm	118 lm/W		•			7780-M-4-666-XX
			4000 K	3350 lm	124 lm/W		•			7780-M-4-667-XX
			3000 K	2240 lm	82 lm/W		•			7780-Y-4-666-XX
			4000 K	2350 lm	87 lm/W		•			7780-Y-4-667-XX
		T8	3000 K	3190 lm	118 lm/W			•		7780-M-5-666-XX
			4000 K	3350 lm	124 lm/W			•		7780-M-5-667-XX
			3000 K	2240 lm	82 lm/W			•		7780-Y-5-666-XX
			4000 K	2350 lm	87 lm/W			•		7780-Y-5-667-XX
			3000 K	3190 lm	118 lm/W				•	7780-M-A-666-XX
			4000 K	3350 lm	124 lm/W				•	7780-M-A-667-XX
			3000 K	2240 lm	82 lm/W				•	7780-Y-A-666-XX
			4000 K	2350 lm	87 lm/W				•	7780-Y-A-667-XX
	38 W	T1	3000 K	3870 lm	101 lm/W	•				7780-U-3-668-XX
			4000 K	4090 lm	107 lm/W	•				7780-U-3-669-XX
			3000 K	3870 lm	101 lm/W		•			7780-U-4-668-XX
			4000 K	4090 lm	107 lm/W		•			7780-U-4-669-XX
			3000 K	3870 lm	101 lm/W			•		7780-U-5-668-XX
			4000 K	4090 lm	107 lm/W			•		7780-U-5-669-XX
			3000 K	3940 lm	103 lm/W	•				7780-I-3-668-XX
			4000 K	4160 lm	109 lm/W	•				7780-I-3-669-XX
	38 W	T2	3000 K	3560 lm	93 lm/W	•				7780-R-3-668-XX
			4000 K	3760 lm	98 lm/W	•				7780-R-3-669-XX
			3000 K	3940 lm	103 lm/W		•			7780-I-4-668-XX
			4000 K	4160 lm	109 lm/W		•			7780-I-4-669-XX
			3000 K	3560 lm	93 lm/W		•			7780-R-4-668-XX
			4000 K	3760 lm	98 lm/W		•			7780-R-4-669-XX
			3000 K	3940 lm	103 lm/W			•		7780-I-5-668-XX
			4000 K	4160 lm	109 lm/W			•		7780-I-5-669-XX
		T3	3000 K	3560 lm	93 lm/W			•		7780-R-5-668-XX
			4000 K	3760 lm	98 lm/W			•		7780-R-5-669-XX

*Please contact sales team for special request.

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code
										CASAMBI	
KORNER 1	<div>OD-7780</div> 	38 W	T3	3000 K	3720 lm	97 lm/W	•				7780-J-3-668-XX
				4000 K	3930 lm	103 lm/W	•				7780-J-3-669-XX
				3000 K	4210 lm	110 lm/W	•				7780-S-3-668-XX
				4000 K	4450 lm	117 lm/W	•				7780-S-3-669-XX
			T3	3000 K	3720 lm	97 lm/W		•			7780-J-4-668-XX
				4000 K	3930 lm	103 lm/W		•			7780-J-4-669-XX
				3000 K	4210 lm	110 lm/W		•			7780-S-4-668-XX
				4000 K	4450 lm	117 lm/W		•			7780-S-4-669-XX
			T3	3000 K	3720 lm	97 lm/W			•		7780-J-5-668-XX
				4000 K	3930 lm	103 lm/W			•		7780-J-5-669-XX
				3000 K	4210 lm	110 lm/W			•		7780-S-5-668-XX
				4000 K	4450 lm	117 lm/W			•		7780-S-5-669-XX
		38 W	T4	3000 K	3370 lm	88 lm/W	•				7780-K-3-668-XX
				4000 K	3550 lm	93 lm/W	•				7780-K-3-669-XX
				3000 K	3370 lm	88 lm/W		•			7780-K-4-668-XX
				4000 K	3550 lm	93 lm/W		•			7780-K-4-669-XX
		38 W	T4	3000 K	3370 lm	88 lm/W			•		7780-K-5-668-XX
				4000 K	3550 lm	93 lm/W			•		7780-K-5-669-XX
		38 W	T5	3000 K	4350 lm	114 lm/W	•				7780-M-3-668-XX
				4000 K	4590 lm	120 lm/W	•				7780-M-3-669-XX
				3000 K	3050 lm	80 lm/W	•				7780-Y-3-668-XX
				4000 K	3220 lm	84 lm/W	•				7780-Y-3-669-XX
				3000 K	4350 lm	114 lm/W		•			7780-M-4-668-XX
				4000 K	4590 lm	120 lm/W		•			7780-M-4-669-XX
				3000 K	3050 lm	80 lm/W		•			7780-Y-4-668-XX
				4000 K	3220 lm	84 lm/W		•			7780-Y-4-669-XX
			T5	3000 K	4350 lm	114 lm/W			•		7780-M-5-668-XX
				4000 K	4590 lm	120 lm/W			•		7780-M-5-669-XX
				3000 K	3050 lm	80 lm/W			•		7780-Y-5-668-XX
				4000 K	3220 lm	84 lm/W			•		7780-Y-5-669-XX
KORNER 2	<div>OD-7781</div> 	50 W	T1	3000 K	5130 lm	102 lm/W	•				7781-U-3-666-XX
				4000 K	5390 lm	107 lm/W	•				7781-U-3-667-XX
				3000 K	5130 lm	102 lm/W		•			7781-U-4-666-XX
				4000 K	5390 lm	107 lm/W		•			7781-U-4-667-XX
			T1	3000 K	5130 lm	102 lm/W			•		7781-U-5-666-XX
				4000 K	5390 lm	107 lm/W			•		7781-U-5-667-XX
				3000 K	5130 lm	102 lm/W				•	7781-U-A-666-XX
				4000 K	5390 lm	107 lm/W				•	7781-U-A-667-XX
		50 W	T2	3000 K	5320 lm	106 lm/W	•				7781-I-3-666-XX
				4000 K	5590 lm	111 lm/W	•				7781-I-3-667-XX
				3000 K	4820 lm	96 lm/W	•				7781-R-3-666-XX
				4000 K	5070 lm	101 lm/W	•				7781-R-3-667-XX
				3000 K	5320 lm	106 lm/W		•			7781-I-4-666-XX
				4000 K	5590 lm	111 lm/W		•			7781-I-4-667-XX
				3000 K	4820 lm	96 lm/W		•			7781-R-4-666-XX
				4000 K	5070 lm	101 lm/W		•			7781-R-4-667-XX
			T2	3000 K	5320 lm	106 lm/W			•		7781-I-5-666-XX
				4000 K	5590 lm	111 lm/W			•		7781-I-5-667-XX
				3000 K	4820 lm	96 lm/W			•		7781-R-5-666-XX
				4000 K	5070 lm	101 lm/W			•		7781-R-5-667-XX
				3000 K	5320 lm	106 lm/W				•	7781-I-A-666-XX
				4000 K	5590 lm	111 lm/W				•	7781-I-A-667-XX
				3000 K	4820 lm	96 lm/W				•	7781-R-A-666-XX
				4000 K	5070 lm	101 lm/W				•	7781-R-A-667-XX
		50 W	T3	3000 K	5010 lm	100 lm/W	•				7781-J-3-666-XX
				4000 K	5270 lm	105 lm/W	•				7781-J-3-667-XX
				3000 K	4600 lm	92 lm/W	•				7781-S-3-666-XX
				4000 K	4830 lm	96 lm/W	•				7781-S-3-667-XX
				3000 K	5010 lm	100 lm/W		•			7781-J-4-666-XX
				4000 K	5270 lm	105 lm/W		•			7781-J-4-667-XX
				3000 K	4600 lm	92 lm/W		•			7781-S-4-666-XX
				4000 K	4830 lm	96 lm/W		•			7781-S-4-667-XX
			T3	3000 K	5010 lm	100 lm/W			•		7781-J-5-666-XX
				4000 K	5270 lm	105 lm/W			•		7781-J-5-667-XX
				3000 K	4600 lm	92 lm/W			•		7781-S-5-666-XX
				4000 K	4830 lm	96 lm/W			•		7781-S-5-667-XX
				3000 K	5010 lm	100 lm/W				•	7781-J-A-666-XX
				4000 K	5270 lm	105 lm/W				•	7781-J-A-667-XX
				3000 K	4600 lm	92 lm/W				•	7781-S-A-666-XX
				4000 K	4830 lm	96 lm/W				•	7781-S-A-667-XX
		50 W	T4	3000 K	4510 lm	90 lm/W	•				7781-K-3-666-XX
				4000 K	4740 lm	94 lm/W	•				7781-K-3-667-XX
				3000 K	4510 lm	90 lm/W		•			7781-K-4-666-XX
				4000 K	4740 lm	94 lm/W		•			7781-K-4-667-XX
				3000 K	4510 lm	90 lm/W			•		7781-K-5-666-XX
				4000 K	4740 lm	94 lm/W			•		7781-K-5-667-XX
				3000 K	4510 lm	90 lm/W				•	7781-K-A-666-XX
				4000 K	4740 lm	94 lm/W				•	7781-K-A-667-XX

KORNER 2

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code
									CASAMBI	
OD-7781 	50 W	T5	3000 K	5790 lm	115 lm/W	•				7781-M-3-666-XX
			4000 K	6090 lm	121 lm/W	•				7781-M-3-667-XX
			3000 K	4090 lm	81 lm/W	•				7781-Y-3-666-XX
			4000 K	4300 lm	86 lm/W	•				7781-Y-3-667-XX
			3000 K	5790 lm	115 lm/W		•			7781-M-4-666-XX
			4000 K	6090 lm	121 lm/W		•			7781-M-4-667-XX
			3000 K	4090 lm	81 lm/W		•			7781-Y-4-666-XX
			4000 K	4300 lm	86 lm/W		•			7781-Y-4-667-XX
		T5	3000 K	5790 lm	115 lm/W			•		7781-M-5-666-XX
			4000 K	6090 lm	121 lm/W			•		7781-M-5-667-XX
			3000 K	4090 lm	81 lm/W			•		7781-Y-5-666-XX
			4000 K	4300 lm	86 lm/W			•		7781-Y-5-667-XX
			3000 K	5790 lm	115 lm/W				•	7781-M-A-666-XX
			4000 K	6090 lm	121 lm/W				•	7781-M-A-667-XX
			3000 K	4090 lm	81 lm/W				•	7781-Y-A-666-XX
			4000 K	4300 lm	86 lm/W				•	7781-Y-A-667-XX
	70 W	T1	3000 K	7000 lm	100 lm/W	•				7781-U-3-668-XX
			4000 K	7390 lm	105 lm/W	•				7781-U-3-669-XX
			3000 K	7000 lm	100 lm/W		•			7781-U-4-668-XX
			4000 K	7390 lm	105 lm/W		•			7781-U-4-669-XX
		T1	3000 K	7000 lm	100 lm/W			•		7781-U-5-668-XX
			4000 K	7390 lm	105 lm/W			•		7781-U-5-669-XX
		T2	3000 K	7260 lm	103 lm/W	•				7781-I-3-668-XX
			4000 K	7660 lm	109 lm/W	•				7781-I-3-669-XX
			3000 K	6570 lm	93 lm/W	•				7781-R-3-668-XX
			4000 K	6940 lm	99 lm/W	•				7781-R-3-669-XX
			3000 K	7260 lm	103 lm/W		•			7781-I-4-668-XX
			4000 K	7660 lm	109 lm/W		•			7781-I-4-669-XX
			3000 K	6570 lm	93 lm/W		•			7781-R-4-668-XX
			4000 K	6940 lm	99 lm/W		•			7781-R-4-669-XX
	70 W	T2	3000 K	7260 lm	103 lm/W			•		7781-I-5-668-XX
			4000 K	7660 lm	109 lm/W			•		7781-I-5-669-XX
			3000 K	6570 lm	93 lm/W			•		7781-R-5-668-XX
			4000 K	6940 lm	99 lm/W			•		7781-R-5-669-XX
		T3	3000 K	6830 lm	97 lm/W	•				7781-J-3-668-XX
			4000 K	7210 lm	103 lm/W	•				7781-J-3-669-XX
			3000 K	6270 lm	89 lm/W	•				7781-S-3-668-XX
			4000 K	6620 lm	94 lm/W	•				7781-S-3-669-XX
	70 W	T3	3000 K	6830 lm	97 lm/W		•			7781-J-4-668-XX
			4000 K	7210 lm	103 lm/W		•			7781-J-4-669-XX
			3000 K	6270 lm	89 lm/W		•			7781-S-4-668-XX
			4000 K	6620 lm	94 lm/W		•			7781-S-4-669-XX
		T3	3000 K	6830 lm	97 lm/W			•		7781-J-5-668-XX
			4000 K	7210 lm	103 lm/W			•		7781-J-5-669-XX
			3000 K	6270 lm	89 lm/W			•		7781-S-5-668-XX
			4000 K	6620 lm	94 lm/W			•		7781-S-5-669-XX
	70 W	T4	3000 K	6150 lm	87 lm/W	•				7781-K-3-668-XX
			4000 K	6490 lm	92 lm/W	•				7781-K-3-669-XX
			3000 K	6150 lm	87 lm/W		•			7781-K-4-668-XX
			4000 K	6490 lm	92 lm/W		•			7781-K-4-669-XX
	70 W	T5	3000 K	6150 lm	87 lm/W			•		7781-K-5-668-XX
			4000 K	6490 lm	92 lm/W			•		7781-K-5-669-XX
		T5	3000 K	7900 lm	112 lm/W	•				7781-M-3-668-XX
			4000 K	8340 lm	119 lm/W	•				7781-M-3-669-XX
			3000 K	5580 lm	79 lm/W	•				7781-Y-3-668-XX
			4000 K	5890 lm	84 lm/W	•				7781-Y-3-669-XX
		T5	3000 K	7900 lm	112 lm/W		•			7781-M-4-668-XX
			4000 K	8340 lm	119 lm/W		•			7781-M-4-669-XX
			3000 K	5580 lm	79 lm/W		•			7781-Y-4-668-XX
			4000 K	5890 lm	84 lm/W		•			7781-Y-4-669-XX
	70 W	T5	3000 K	7900 lm	112 lm/W			•		7781-M-5-668-XX
			4000 K	8340 lm	119 lm/W			•		7781-M-5-669-XX
			3000 K	5580 lm	79 lm/W			•		7781-Y-5-668-XX
			4000 K	5890 lm	84 lm/W			•		7781-Y-5-669-XX

HELIOS

■ POLE MOUNTED

HELIOS is a large wall mounted or pole-top luminaire with symmetrical and asymmetrical indirect light distribution. The indirect light from the luminaire generates a uniform and glare free illumination. The recommended mounting height is between 3 – 5 meters from the ground.

HELIOS is available with COB LED light source in two wattages in 2700K, 3000K or 4000K. It is suitable for parking lots, public parks, pedestrian, squares and open areas where glare control is required. The luminaire blends well with all contemporary architectural design during the day and night. Available as an option are Aluminum Poles, Galvanized steel poles and anchorage unit for concrete foundations.



Content
by Application



Content
by Family



www.unilamp.co.th/en/p/helios

Specification


- Designed, manufactured and tested according to IEC 60598.
- LM6 die-cast aluminum housing.
- GFR polymer disc.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.

Available Color



****Custom colors are available on request.**


HELIOS




HELIOS

Application Type : Pole mounted

Subgroup : Urban ambient

HELIOS / 7221	
HELIOS / 7224	
Luminaire Performance	
4690 – 6440 lm	
57 – 75 W	
81 – 86 lm/W	
Beam Options	
	
Color Temperature	
3000K/ 4000K	
Controller	
On-Off / 1-10V	
Input Voltage	
220-240VAC 50/60HZ	
Accessories	
	Aluminum pole
	Steel pole
	Anchor bolt

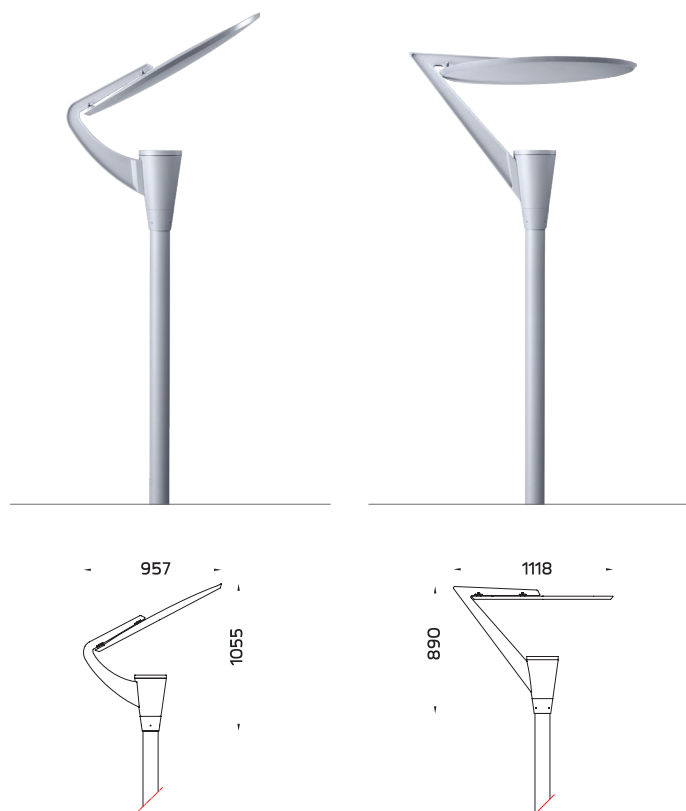

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller		Ordering Code
									
HELIOS	OD-7221	57 W	N/A	3000 K	4690 lm	82 lm/W	•		7221-0-3-888-XX
		75 W	N/A	4000 K	4930 lm	86 lm/W	•		7221-0-3-892-XX
	OD-7224	75 W	N/A	3000 K	6130 lm	81 lm/W	•		7221-0-3-903-XX
				4000 K	6440 lm	85 lm/W	•		7221-0-3-906-XX
		57 W	N/A	3000 K	4690 lm	82 lm/W	•		7224-0-3-888-XX
		75 W	N/A	3000 K	6130 lm	81 lm/W	•		7224-0-3-903-XX
				4000 K	6440 lm	85 lm/W		•	7224-0-4-906-XX


*Please contact sales team for special request.

MARANELLO

■ POLE MOUNTED

MARANELLO is a family of large wall mounted and pole-top luminaires with symmetrical low glare indirect light distribution. It is available with COB LED in two wattages in 2700K, 3000K or 4000K.

MARANELLO blends well with all contemporary architectural design during the day and night. It has proven its success in both design and quality. The recommended mounting height is between 3 – 5 metres. Available as an option are Aluminum Poles, Galvanized steel poles and anchorage unit for concrete foundations.

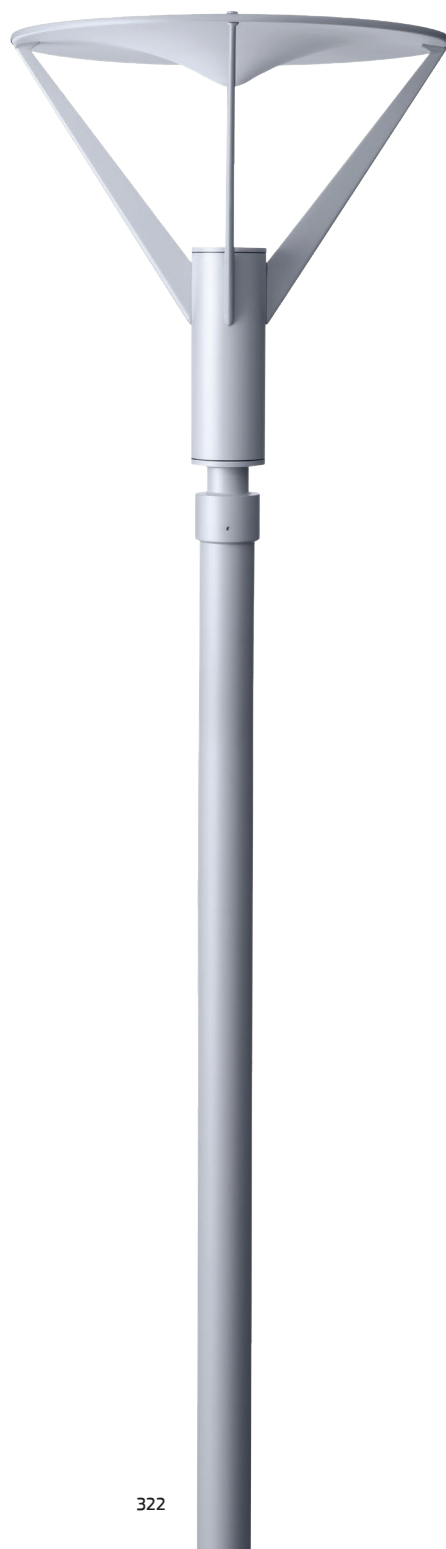

www.unilamp.co.th/en/p/maranello

Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum and extruded aluminum body.
- Spun Aluminum disc.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass diffuser.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual


Available Color



****Custom colors are available on request.**



MARANELLO



MARANELLO

Application Type : Pole mounted
Subgroup : Urban ambient

MARANELLO/ 7222

Luminaire Performance

2550 – 3500 lm
57 – 75 W
44 – 47 lm/W

Beam Options



Color Temperature

3000K/ 4000K

Controller

On-off

Input Voltage

220-240VAC 50/60HZ

Accessories



Aluminum pole



Steel pole



Anchor bolt

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller	Ordering Code
							⏻	
MARANELLO	OD-7222	57 W	N/A	3000 K	2550 lm	44 lm/W	•	7222-0-3-888-XX
				4000 K	2680 lm	47 lm/W	•	7222-0-3-892-XX
		75 W	N/A	3000 K	3330 lm	44 lm/W	•	7222-0-3-903-XX
				4000 K	3500 lm	46 lm/W	•	7222-0-3-906-XX

*Please contact sales team for special request.

BLAZE

■ POLE MOUNTED



BLAZE is a family of large size wall mount and pole-top luminaires. The top reflector is easily adjustable from symmetric to asymmetric distribution to get the desired light delivered for most applications and assists with glare control.

BLAZE is made for smooth and uniform light distribution on designated areas. The recommended mounting height is between 3 – 5 meters from the ground. It is equipped with high CRI COB LED and is available in 2700K, 3000K and 4000K. It is most suited in parking lots, public parks, pedestrian and open spaces.

BLAZE is the perfect solution for a glare free installation. Available as an option are Aluminum Poles, Galvanized steel poles and anchorage unit for concrete foundations.



www.unilamp.co.th/en/p/blade

Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum housing.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.

Available Color



***Custom colors are available on request.*


Typical Application



BLAZE



BLAZE



BLAZE

Application Type : Pole mounted
Subgroup : Urban ambient

BLAZE / 7223	
Luminaire Performance	
4510 – 5670 lm	
57 W	
79 – 99 lm/W	
Beam Options	
Color Temperature	
2700K/ 3000K/ 4000K	
Controller	
On-Off/ DALI	
Input Options	
220–240Vac 50/60Hz	

Accessories	
	Aluminum pole
	Steel pole
	Anchor bolt

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller		Ordering Code
									
BLAZE	OD-7223	57 W	N/A	2700 K	4510 lm	79 lm/W	• • •	•	7223-0-3-507-XX 7223-0-3-903-XX 7223-0-5-903-XX 7223-0-3-906-XX
				3000 K	5400 lm	94 lm/W			
				3000 K	5400 lm	94 lm/W			
				4000 K	5670 lm	99 lm/W			

**Please contact sales team for special request.*



City Land Mall – DUBAI

NEWLY Added NeoPLACE

■ POLE MOUNTED

NeoPLACE is a family of large wall light and pole-top luminaires with symmetrical low glare indirect light distribution. The recommended mounting height is between 3 – 5 meters. It is available in LED light source in 2 different color temperature 3000K and 4000K with DALI dimming option.

NeoPLACE is suitable for the place where glare control is preferred. It is a perfect alternative to replace old style cone-shaped conventional luminaires. It is suitable to illuminate parking lots, public parks, pedestrian and open spaces. Available as an option are Aluminum Poles, Galvanized steel poles and anchorage unit for concrete foundations.



Content
by Application



Content
by Family




www.unilamp.co.th/en/p/neoplace



NeoPLACE



* Pole is not included and has to be ordered separately.



Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum and spun Aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Polycarbonate protective cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Pre-wired cable from the factory.
- Installation work must be carried out according to the enclosed product manual.

Available Color



**Custom colors are available on request.

NeoPLACE

Application Type : Pole mounted
Subgroup : Urban ambient

NeoPLACE/ 7220

Luminaire Performance

2180 – 3130 lm
25 – 35 W
84 – 91 lm/W

Beam Options



Color Temperature

3000K/ 4000K

Controller

On-off

Input Voltage

220-240VAC 50/60HZ

Accessories



Upright shield




Aluminum pole



Steel pole



Anchor bolt

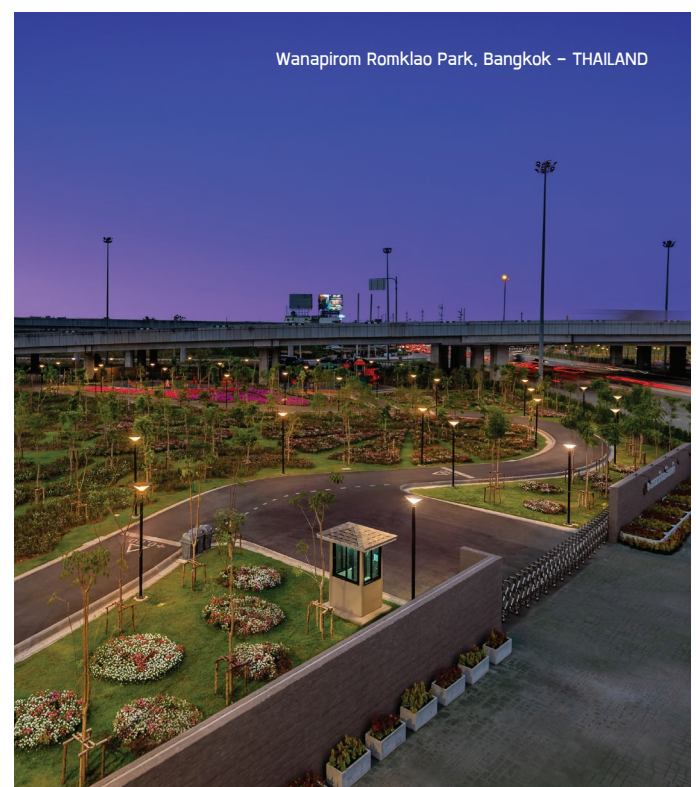

Wanapirom Romklao Park, Bangkok – THAILAND


NeoPLACE



NeoPLACE Direct




* Pole is not included and has to be ordered separately.



NeoPLACE Direct – DS



* Pole is not included and has to be ordered separately.




NeoPLACE Direct

Application Type : Pole mounted

Subgroup : Urban ambient/ Urban area

NeoPLACE Direct/ 7760	
NeoPLACE Direct – DS/ 7761	
Luminaire Performance	
1990 – 6440 lm	
24 – 72 W	
75 – 97 lm/W	
Beam Options	
	
Color Temperature	
2700K/ 3000K/ 4000K	
Controller	
On-off/ 1-10V/ DALI/ CASAMBI	
Input Voltage	
220-240VAC 50/60Hz	

Accessories

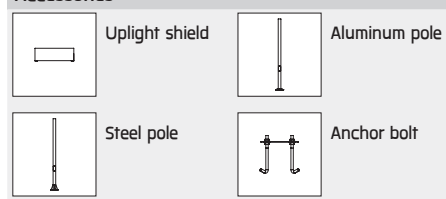

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code		
										CASAMBI			
NeoPLACE	OD-7220												
	25 W		N/A	3000 K 4000 K	2180 lm 2290 lm	87 lm/W 91 lm/W	• •				7220-0-3-666-XX 7220-0-3-667-XX		
	35 W		N/A	3000 K 4000 K	2970 lm 3130 lm	84 lm/W 89 lm/W	• •				7220-0-3-668-XX 7220-0-3-669-XX		
NeoPLACE Direct	OD-7760		24 W	T2	4000 K	2280 lm	95 lm/W	•	•	•	•	•	7760-I-3-547-XX 7760-I-4-547-XX 7760-I-5-547-XX 7760-I-A-547-XX
	4000 K				2280 lm	95 lm/W							
	4000 K				2280 lm	95 lm/W							
	4000 K				2280 lm	95 lm/W							
	24 W		T3	4000 K	2120 lm	88 lm/W	•	•	•	•	7760-J-3-547-XX 7760-J-4-547-XX 7760-J-5-547-XX 7760-J-A-547-XX		
				4000 K	2120 lm	88 lm/W							
				4000 K	2120 lm	88 lm/W							
				4000 K	2120 lm	88 lm/W							
	24 W		T4	4000 K	2210 lm	92 lm/W	•	•	•	•	7760-K-3-547-XX 7760-K-4-547-XX 7760-K-5-547-XX 7760-K-A-547-XX		
				4000 K	2210 lm	92 lm/W							
				4000 K	2210 lm	92 lm/W							
				4000 K	2210 lm	92 lm/W							
	24 W		T5	4000 K	2120 lm	88 lm/W	•	•	•	•	7760-W-3-547-XX 7760-L-3-547-XX 7760-W-4-547-XX 7760-L-4-547-XX 7760-W-5-547-XX 7760-L-5-547-XX		
				4000 K	2350 lm	97 lm/W	•						
				4000 K	2120 lm	88 lm/W							
				4000 K	2350 lm	97 lm/W							
				4000 K	2120 lm	88 lm/W							
				4000 K	2350 lm	97 lm/W							
				4000 K	2120 lm	88 lm/W							
				4000 K	2350 lm	97 lm/W							
	25 W		T2	2700 K	2140 lm	85 lm/W	•		•	•	7760-I-3-677-XX 7760-I-4-677-XX 7760-I-5-677-XX 7760-I-A-677-XX 7760-I-A-546-XX		
				3000 K	2140 lm	85 lm/W	•						
				2700 K	2140 lm	85 lm/W							
				3000 K	2140 lm	85 lm/W							
				2700 K	2140 lm	85 lm/W							
				3000 K	2140 lm	85 lm/W							
				2700 K	2140 lm	85 lm/W							
				3000 K	2140 lm	85 lm/W							
	25 W		T3	2700 K	1990 lm	79 lm/W	•		•	•	7760-J-3-677-XX 7760-J-3-546-XX 7760-J-4-677-XX 7760-J-4-546-XX 7760-J-5-677-XX 7760-J-5-546-XX		
				3000 K	1990 lm	79 lm/W	•						
				2700 K	1990 lm	79 lm/W							
				3000 K	1990 lm	79 lm/W							
				2700 K	1990 lm	79 lm/W							
				3000 K	1990 lm	79 lm/W							
				2700 K	1990 lm	79 lm/W							
				3000 K	1990 lm	79 lm/W							
	25 W		T4	2700 K	2080 lm	83 lm/W	•		•	•	7760-K-3-677-XX 7760-K-3-546-XX 7760-K-4-677-XX 7760-K-4-546-XX 7760-K-5-677-XX 7760-K-5-546-XX		
				3000 K	2080 lm	83 lm/W	•						
				2700 K	2080 lm	83 lm/W							
				3000 K	2080 lm	83 lm/W							
				2700 K	2080 lm	83 lm/W							
				3000 K	2080 lm	83 lm/W							
	25 W		T5	2700 K	1990 lm	79 lm/W	•		•	•	7760-W-3-677-XX 7760-L-3-677-XX 7760-W-3-546-XX 7760-L-3-546-XX		
				2700 K	2200 lm	88 lm/W	•						
				3000 K	1990 lm	79 lm/W	•						
				3000 K	2200 lm	88 lm/W	•						
	25 W		T5	2700 K	1990 lm	79 lm/W		•	•	•	7760-W-4-677-XX 7760-L-4-677-XX 7760-W-4-546-XX 7760-L-4-546-XX		
				2700 K	2200 lm	88 lm/W							
3000 K		1990 lm		79 lm/W									
3000 K		2200 lm		88 lm/W									
25 W	T5	2700 K	1990 lm	79 lm/W		•	•	•	7760-W-5-677-XX 7760-L-5-677-XX 7760-W-5-546-XX 7760-L-5-546-XX				
		2700 K	2200 lm	88 lm/W									
		3000 K	1990 lm	79 lm/W									
		3000 K	2200 lm	88 lm/W									
25 W	T5	2700 K	1990 lm	79 lm/W		•	•	•	7760-W-A-677-XX 7760-L-A-677-XX 7760-W-A-546-XX 7760-L-A-546-XX				
		2700 K	2200 lm	88 lm/W									
		3000 K	1990 lm	79 lm/W									
		3000 K	2200 lm	88 lm/W									
34 W	T2	4000 K	3130 lm	92 lm/W	•	•	•	•	7760-I-3-545-XX 7760-I-4-545-XX 7760-I-5-545-XX 7760-I-A-545-XX				
		4000 K	3130 lm	92 lm/W									
		4000 K	3130 lm	92 lm/W									
		4000 K	3130 lm	92 lm/W									
34 W	T3	4000 K	2910 lm	85 lm/W	•	•	•	•	7760-J-3-545-XX 7760-J-4-545-XX 7760-J-5-545-XX 7760-J-A-545-XX				
		4000 K	2910 lm	85 lm/W									
		4000 K	2910 lm	85 lm/W									
		4000 K	2910 lm	85 lm/W									
34 W	T4	4000 K	3040 lm	89 lm/W	•	•	•	•	7760-K-3-545-XX 7760-K-4-545-XX 7760-K-5-545-XX 7760-K-A-545-XX				
		4000 K	3040 lm	89 lm/W									
		4000 K	3040 lm	89 lm/W									
		4000 K	3040 lm	89 lm/W									
34 W	T5	4000 K	2910 lm	85 lm/W	•		•	•	7760-W-3-545-XX 7760-L-3-545-XX 7760-W-4-545-XX 7760-L-4-545-XX				
		4000 K	3220 lm	94 lm/W	•								
		4000 K	2910 lm	85 lm/W									
		4000 K	3220 lm	94 lm/W									

NeoPLACE Direct

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code
										
OD-7760 	34 W	T5	4000 K	2910 lm	85 lm/W			•		7760-W-5-545-XX
			4000 K	3220 lm	94 lm/W			•		7760-L-5-545-XX
			4000 K	2910 lm	85 lm/W				•	7760-W-A-545-XX
			4000 K	3220 lm	94 lm/W				•	7760-L-A-545-XX
	36 W	T2	2700 K	2940 lm	81 lm/W	•				7760-I-3-676-XX
			3000 K	2940 lm	81 lm/W	•				7760-I-3-544-XX
			2700 K	2940 lm	81 lm/W		•			7760-I-4-676-XX
			3000 K	2940 lm	81 lm/W		•			7760-I-4-544-XX
			2700 K	2940 lm	81 lm/W			•		7760-I-5-676-XX
			3000 K	2940 lm	81 lm/W			•		7760-I-5-544-XX
			2700 K	2940 lm	81 lm/W				•	7760-I-A-676-XX
			3000 K	2940 lm	81 lm/W				•	7760-I-A-544-XX
	36 W	T3	2700 K	2730 lm	75 lm/W	•				7760-J-3-676-XX
			3000 K	2730 lm	75 lm/W	•				7760-J-3-544-XX
			2700 K	2730 lm	75 lm/W		•			7760-J-4-676-XX
			3000 K	2730 lm	75 lm/W		•			7760-J-4-544-XX
			2700 K	2730 lm	75 lm/W			•		7760-J-5-676-XX
			3000 K	2730 lm	75 lm/W			•		7760-J-5-544-XX
			2700 K	2730 lm	75 lm/W				•	7760-J-A-676-XX
			3000 K	2730 lm	75 lm/W				•	7760-J-A-544-XX
	36 W	T4	2700 K	2850 lm	79 lm/W	•				7760-K-3-676-XX
			3000 K	2850 lm	79 lm/W	•				7760-K-3-544-XX
			2700 K	2850 lm	79 lm/W		•			7760-K-4-676-XX
			3000 K	2850 lm	79 lm/W		•			7760-K-4-544-XX
			2700 K	2850 lm	79 lm/W			•		7760-K-5-676-XX
			3000 K	2850 lm	79 lm/W			•		7760-K-5-544-XX
			2700 K	2850 lm	79 lm/W				•	7760-K-A-676-XX
			3000 K	2850 lm	79 lm/W				•	7760-K-A-544-XX
	36 W	T5	2700 K	2730 lm	75 lm/W	•				7760-W-3-676-XX
			2700 K	3020 lm	83 lm/W	•				7760-L-3-676-XX
			3000 K	2730 lm	75 lm/W	•				7760-W-3-544-XX
			3000 K	3020 lm	83 lm/W	•				7760-L-3-544-XX
	36 W	T5	2700 K	2730 lm	75 lm/W		•			7760-W-4-676-XX
			2700 K	3020 lm	83 lm/W		•			7760-L-4-676-XX
			3000 K	2730 lm	75 lm/W		•			7760-W-4-544-XX
			3000 K	3020 lm	83 lm/W		•			7760-L-4-544-XX
	36 W	T5	2700 K	2730 lm	75 lm/W			•		7760-W-5-676-XX
			2700 K	3020 lm	83 lm/W			•		7760-L-5-676-XX
			3000 K	2730 lm	75 lm/W			•		7760-W-5-544-XX
			3000 K	3020 lm	83 lm/W			•		7760-L-5-544-XX
	36 W	T5	2700 K	2730 lm	75 lm/W				•	7760-W-A-676-XX
			2700 K	3020 lm	83 lm/W				•	7760-L-A-676-XX
			3000 K	2730 lm	75 lm/W				•	7760-W-A-544-XX
			3000 K	3020 lm	83 lm/W				•	7760-L-A-544-XX

NeoPLACE Direct- DS

OD-7761 	48 W	T2	4000 K	4560 lm	95 lm/W	•				7761-I-3-547-XX
			4000 K	4560 lm	95 lm/W		•			7761-I-4-547-XX
			4000 K	4560 lm	95 lm/W			•		7761-I-5-547-XX
			4000 K	4560 lm	95 lm/W				•	7761-I-A-547-XX
	48 W	T3	4000 K	4240 lm	88 lm/W	•				7761-J-3-547-XX
			4000 K	4240 lm	88 lm/W		•			7761-J-4-547-XX
			4000 K	4240 lm	88 lm/W			•		7761-J-5-547-XX
			4000 K	4240 lm	88 lm/W				•	7761-J-A-547-XX
	48 W	T4	4000 K	4420 lm	92 lm/W	•				7761-K-3-547-XX
			4000 K	4420 lm	92 lm/W		•			7761-K-4-547-XX
			4000 K	4420 lm	92 lm/W			•		7761-K-5-547-XX
			4000 K	4420 lm	92 lm/W				•	7761-K-A-547-XX
	48 W	T5	4000 K	4240 lm	88 lm/W	•				7761-W-3-547-XX
			4000 K	4700 lm	97 lm/W	•				7761-L-3-547-XX
			4000 K	4240 lm	88 lm/W		•			7761-W-4-547-XX
			4000 K	4700 lm	97 lm/W		•			7761-L-4-547-XX
			4000 K	4240 lm	88 lm/W			•		7761-W-5-547-XX
			4000 K	4700 lm	97 lm/W			•		7761-L-5-547-XX
			4000 K	4240 lm	88 lm/W				•	7761-W-A-547-XX
			4000 K	4700 lm	97 lm/W				•	7761-L-A-547-XX
	50 W	T2	2700 K	4280 lm	85 lm/W	•				7761-I-3-677-XX
			3000 K	4280 lm	85 lm/W	•				7761-I-3-546-XX
			2700 K	4280 lm	85 lm/W		•			7761-I-4-677-XX
			3000 K	4280 lm	85 lm/W		•			7761-I-4-546-XX
			2700 K	4280 lm	85 lm/W			•		7761-I-5-677-XX
			3000 K	4280 lm	85 lm/W			•		7761-I-5-546-XX
			2700 K	4280 lm	85 lm/W				•	7761-I-A-677-XX
			3000 K	4280 lm	85 lm/W				•	7761-I-A-546-XX
	50 W	T3	2700 K	3980 lm	79 lm/W	•				7761-J-3-677-XX
			3000 K	3980 lm	79 lm/W	•				7761-J-3-546-XX
			2700 K	3980 lm	79 lm/W		•			7761-J-4-677-XX
			3000 K	3980 lm	79 lm/W		•			7761-J-4-546-XX
			2700 K	3980 lm	79 lm/W			•		7761-J-5-677-XX
			3000 K	3980 lm	79 lm/W			•		7761-J-5-546-XX
			2700 K	3980 lm	79 lm/W				•	7761-J-A-677-XX
			3000 K	3980 lm	79 lm/W				•	7761-J-A-546-XX
	50 W	T4	2700 K	4160 lm	83 lm/W	•				7761-K-3-677-XX
			3000 K	4160 lm	83 lm/W	•				7761-K-3-546-XX

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code
										
OD-7761 	50 W	T4	2700 K	4160 lm	83 lm/W		•			7761-K-4-677-XX
			3000 K	4160 lm	83 lm/W		•			7761-K-4-546-XX
			2700 K	4160 lm	83 lm/W			•		7761-K-5-677-XX
			3000 K	4160 lm	83 lm/W			•		7761-K-5-546-XX
			2700 K	4160 lm	83 lm/W				•	7761-K-A-677-XX
			3000 K	4160 lm	83 lm/W				•	7761-K-A-546-XX
	50 W	T5	2700 K	3980 lm	79 lm/W	•				7761-W-3-677-XX
			2700 K	4400 lm	88 lm/W	•				7761-L-3-677-XX
			3000 K	3980 lm	79 lm/W	•				7761-W-3-546-XX
			3000 K	4400 lm	88 lm/W	•				7761-L-3-546-XX
	50 W	T5	2700 K	3980 lm	79 lm/W		•			7761-W-4-677-XX
			2700 K	4400 lm	88 lm/W		•			7761-L-4-677-XX
			3000 K	3980 lm	79 lm/W		•			7761-W-4-546-XX
			3000 K	4400 lm	88 lm/W		•			7761-L-4-546-XX
	50 W	T5	2700 K	3980 lm	79 lm/W			•		7761-W-5-677-XX
			2700 K	4400 lm	88 lm/W			•		7761-L-5-677-XX
			3000 K	3980 lm	79 lm/W			•		7761-W-5-546-XX
			3000 K	4400 lm	88 lm/W			•		7761-L-5-546-XX
	50 W	T5	2700 K	3980 lm	79 lm/W				•	7761-W-A-677-XX
			2700 K	4400 lm	88 lm/W				•	7761-L-A-677-XX
			3000 K	3980 lm	79 lm/W				•	7761-W-A-546-XX
			3000 K	4400 lm	88 lm/W				•	7761-L-A-546-XX
	68 W	T2	4000 K	6260 lm	92 lm/W	•				7761-I-3-545-XX
			4000 K	6260 lm	92 lm/W		•			7761-I-4-545-XX
			4000 K	6260 lm	92 lm/W			•		7761-I-5-545-XX
			4000 K	6260 lm	92 lm/W				•	7761-I-A-545-XX
	68 W	T3	4000 K	5820 lm	85 lm/W	•				7761-J-3-545-XX
			4000 K	5820 lm	85 lm/W		•			7761-J-4-545-XX
			4000 K	5820 lm	85 lm/W			•		7761-J-5-545-XX
			4000 K	5820 lm	85 lm/W				•	7761-J-A-545-XX
	68 W	T4	4000 K	6080 lm	89 lm/W	•				7761-K-3-545-XX
			4000 K	6080 lm	89 lm/W		•			7761-K-4-545-XX
			4000 K	6080 lm	89 lm/W			•		7761-K-5-545-XX
			4000 K	6080 lm	89 lm/W				•	7761-K-A-545-XX
	68 W	T5	4000 K	5820 lm	85 lm/W	•				7761-W-3-545-XX
			4000 K	6440 lm	94 lm/W	•				7761-L-3-545-XX
			4000 K	5820 lm	85 lm/W		•			7761-W-4-545-XX
			4000 K	6440 lm	94 lm/W		•			7761-L-4-545-XX
			4000 K	5820 lm	85 lm/W			•		7761-W-5-545-XX
			4000 K	6440 lm	94 lm/W			•		7761-L-5-545-XX
			4000 K	5820 lm	85 lm/W				•	7761-W-A-545-XX
			4000 K	6440 lm	94 lm/W				•	7761-L-A-545-XX
	72 W	T2	2700 K	5880 lm	81 lm/W	•				7761-I-3-676-XX
			3000 K	5880 lm	81 lm/W	•				7761-I-3-544-XX
			2700 K	5880 lm	81 lm/W		•			7761-I-4-676-XX
			3000 K	5880 lm	81 lm/W		•			7761-I-4-544-XX
			2700 K	5880 lm	81 lm/W			•		7761-I-5-676-XX
			3000 K	5880 lm	81 lm/W			•		7761-I-5-544-XX
			2700 K	5880 lm	81 lm/W				•	7761-I-A-676-XX
			3000 K	5880 lm	81 lm/W				•	7761-I-A-544-XX
	72 W	T3	2700 K	5460 lm	75 lm/W	•				7761-J-3-676-XX
			3000 K	5460 lm	75 lm/W	•				7761-J-3-544-XX
			2700 K	5460 lm	75 lm/W		•			7761-J-4-676-XX
			3000 K	5460 lm	75 lm/W		•			7761-J-4-544-XX
			2700 K	5460 lm	75 lm/W			•		7761-J-5-676-XX
			3000 K	5460 lm	75 lm/W			•		7761-J-5-544-XX
			2700 K	5460 lm	75 lm/W				•	7761-J-A-676-XX
			3000 K	5460 lm	75 lm/W				•	7761-J-A-544-XX
	72 W	T4	2700 K	5700 lm	79 lm/W	•				7761-K-3-676-XX
			3000 K	5700 lm	79 lm/W	•				7761-K-3-544-XX
			2700 K	5700 lm	79 lm/W		•			7761-K-4-676-XX
			3000 K	5700 lm	79 lm/W		•			7761-K-4-544-XX
			2700 K	5700 lm	79 lm/W			•		7761-K-5-676-XX
			3000 K	5700 lm	79 lm/W			•		7761-K-5-544-XX
			2700 K	5700 lm	79 lm/W				•	7761-K-A-676-XX
			3000 K	5700 lm	79 lm/W				•	7761-K-A-544-XX
	72 W	T5	2700 K	5460 lm	75 lm/W	•				7761-W-3-676-XX
			2700 K	6040 lm	83 lm/W	•				7761-L-3-676-XX
			3000 K	5460 lm	75 lm/W	•				7761-W-3-544-XX
			3000 K	6040 lm	83 lm/W	•				7761-L-3-544-XX
	72 W	T5	2700 K	5460 lm	75 lm/W		•			7761-W-4-676-XX
			2700 K	6040 lm	83 lm/W		•			7761-L-4-676-XX
			3000 K	5460 lm	75 lm/W		•			7761-W-4-544-XX
			3000 K	6040 lm	83 lm/W		•			7761-L-4-544-XX
	72 W	T5	2700 K	5460 lm	75 lm/W			•		7761-W-5-676-XX
			2700 K	6040 lm	83 lm/W			•		7761-L-5-676-XX
			3000 K	5460 lm	75 lm/W			•		7761-W-5-544-XX
			3000 K	6040 lm	83 lm/W			•		7761-L-5-544-XX
	72 W	T5	2700 K	5460 lm	75 lm/W				•	7761-W-A-676-XX
			2700 K	6040 lm	83 lm/W				•	7761-L-A-676-XX
			3000 K	5460 lm	75 lm/W				•	7761-W-A-544-XX
			3000 K	6040 lm	83 lm/W				•	7761-L-A-544-XX

NEWLY Added STICK



■ POLE MOUNTED



STICK is cylindrical-shaped light column with symmetrical light distribution. The LED light source in combination with a unique 250 degree wide spread lens provides uniform light. It is available with the choices of three different color temperatures from 2700K, 3000K or 4000K in high color consistency and remarkable color rendering index.

STICK with HID light source and E27 holder for retrofit lamps are also available. The internal glare suppression louver improves the lighting quality by limiting the upward light emission.

STICK is generally installed in the walkways, gardens, parks, commercial areas and open spaces to provide the general lighting from mid-high level. The recommended mounting height is between 3 – 4 meters above the ground.

STICK Direct is an evolution of the existing **STICK** product line. The cylindrical shaped luminaire is available with symmetric or asymmetric light distribution. The efficacy of **STICK** has been improved to at least 120lm/W and virtually uplight free.

The ambient temperature is rated up to 50°C. **STICK direct** is available as light column or pole-top light. This makes **STICK direct** a great choice for new installations and site upgrades.



www.unilamp.co.th/en/p/stick

Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum and extruded aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- PC protective cover.
- Anodized aluminum louvers.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Installation must be carried out according to the enclosed product manual.

Available Color





***Custom colors are available on request.*



STICK



STICK

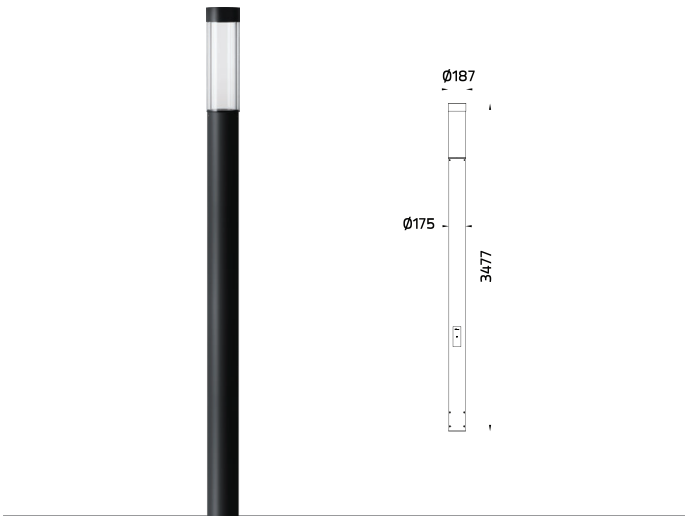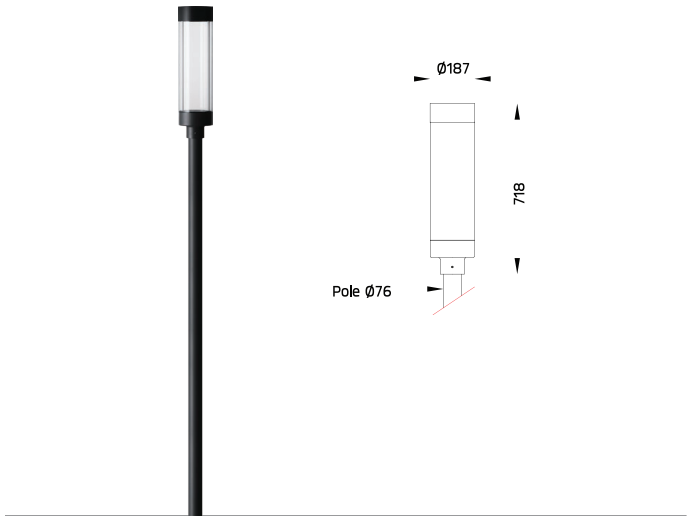


* Pole is not included and has to be ordered separately.

STICK

NEW!


Application Type : Light column
Subgroup : Urban area / Urban ambient

STICK / 7268	
Luminaire Performance	
3090 – 4770 lm	
26 – 36 W	
117 – 133 lm/W	
Beam Options	
	
Color Temperature	
3000K/ 4000K	
Controller	
On-off/ DIM 1-10V/ DALI/ Casambi	
Input Voltage	
220-240Vac 50/60Hz	

STICK

NEW!

Application Type : Pole mounted
Subgroup : Urban area / Urban ambient

STICK / 7269	
Luminaire Performance	
3090 – 4770 lm	
26 – 36 W	
117 – 133 lm/W	
Beam Options	
	
Color Temperature	
3000K/ 4000K	
Controller	
On-off/ DIM 1-10V/ DALI/ Casambi	
Input Voltage	
220-240Vac 50/60Hz	

Accessories

 Aluminum pole

 Steel pole

 Anchor bolt

STICK

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code
										
OD-7268 	26 W	T1	3000 K	3210 lm	123 lm/W	•				7268-U-3-668-XX
			4000 K	3380 lm	130 lm/W	•				7268-U-3-669-XX
			3000 K	3210 lm	123 lm/W		•			7268-U-4-668-XX
			4000 K	3380 lm	130 lm/W		•			7268-U-4-669-XX
			3000 K	3210 lm	123 lm/W			•		7268-U-5-668-XX
			4000 K	3380 lm	130 lm/W			•		7268-U-5-669-XX
	26 W	T1	3000 K	3210 lm	123 lm/W				•	7268-U-A-668-XX
			4000 K	3380 lm	130 lm/W				•	7268-U-A-669-XX
			3000 K	3200 lm	123 lm/W	•				7268-V-3-668-XX
			4000 K	3360 lm	129 lm/W	•				7268-V-3-669-XX
			3000 K	3200 lm	123 lm/W		•			7268-V-4-668-XX
			4000 K	3360 lm	129 lm/W		•			7268-V-4-669-XX
	26 W	T5	3000 K	3200 lm	123 lm/W			•		7268-V-5-668-XX
			4000 K	3360 lm	129 lm/W			•		7268-V-5-669-XX
			3000 K	3200 lm	123 lm/W				•	7268-V-A-668-XX
			4000 K	3360 lm	129 lm/W				•	7268-V-A-669-XX
			3000 K	3090 lm	118 lm/W	•				7268-L-3-668-XX
			4000 K	3260 lm	125 lm/W	•				7268-L-3-669-XX
	26 W	T5	3000 K	3090 lm	118 lm/W		•			7268-L-4-668-XX
			4000 K	3260 lm	125 lm/W		•			7268-L-4-669-XX
			3000 K	3090 lm	118 lm/W			•		7268-L-5-668-XX
			4000 K	3260 lm	125 lm/W			•		7268-L-5-669-XX
			3000 K	3090 lm	118 lm/W				•	7268-L-A-668-XX
			4000 K	3260 lm	125 lm/W				•	7268-L-A-669-XX
	26 W	T5	3000 K	3310 lm	127 lm/W	•				7268-M-3-668-XX
			4000 K	3480 lm	133 lm/W	•				7268-M-3-669-XX
			3000 K	3310 lm	127 lm/W		•			7268-M-4-668-XX
			4000 K	3480 lm	133 lm/W		•			7268-M-4-669-XX
			3000 K	3310 lm	127 lm/W			•		7268-M-5-668-XX
			4000 K	3480 lm	133 lm/W			•		7268-M-5-669-XX
	36 W	T1	3000 K	3310 lm	127 lm/W				•	7268-M-A-668-XX
			4000 K	3480 lm	133 lm/W				•	7268-M-A-669-XX
			3000 K	4390 lm	121 lm/W	•				7268-U-3-666-XX
			4000 K	4630 lm	128 lm/W	•				7268-U-3-667-XX
			3000 K	4390 lm	121 lm/W		•			7268-U-4-666-XX
			4000 K	4630 lm	128 lm/W		•			7268-U-4-667-XX
	36 W	T1	3000 K	4390 lm	121 lm/W			•		7268-U-5-666-XX
			4000 K	4630 lm	128 lm/W			•		7268-U-5-667-XX
			3000 K	4390 lm	121 lm/W				•	7268-U-A-666-XX
			4000 K	4630 lm	128 lm/W				•	7268-U-A-667-XX
			3000 K	4370 lm	121 lm/W	•				7268-V-3-666-XX
			4000 K	4610 lm	128 lm/W	•				7268-V-3-667-XX
	36 W	T1	3000 K	4370 lm	121 lm/W		•			7268-V-4-666-XX
			4000 K	4610 lm	128 lm/W		•			7268-V-4-667-XX
			3000 K	4370 lm	121 lm/W			•		7268-V-5-666-XX
			4000 K	4610 lm	128 lm/W			•		7268-V-5-667-XX
			3000 K	4370 lm	121 lm/W				•	7268-V-A-666-XX
			4000 K	4610 lm	128 lm/W				•	7268-V-A-667-XX
	36 W	T5	3000 K	4230 lm	117 lm/W	•				7268-L-3-666-XX
			4000 K	4460 lm	123 lm/W	•				7268-L-3-667-XX
			3000 K	4230 lm	117 lm/W		•			7268-L-4-666-XX
			4000 K	4460 lm	123 lm/W		•			7268-L-4-667-XX
			3000 K	4230 lm	117 lm/W			•		7268-L-5-666-XX
			4000 K	4460 lm	123 lm/W			•		7268-L-5-667-XX
	36 W	T5	3000 K	4230 lm	117 lm/W				•	7268-L-A-666-XX
			4000 K	4460 lm	123 lm/W				•	7268-L-A-667-XX
			3000 K	4520 lm	125 lm/W	•				7268-M-3-666-XX
			4000 K	4770 lm	132 lm/W	•				7268-M-3-667-XX
			3000 K	4520 lm	125 lm/W		•			7268-M-4-666-XX
			4000 K	4770 lm	132 lm/W		•			7268-M-4-667-XX
	36 W	T5	3000 K	4520 lm	125 lm/W			•		7268-M-5-666-XX
			4000 K	4770 lm	132 lm/W			•		7268-M-5-667-XX
			3000 K	4520 lm	125 lm/W				•	7268-M-A-666-XX
			4000 K	4770 lm	132 lm/W				•	7268-M-A-667-XX

*Please contact sales team for special request.

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code
									CASAMBI	
OD-7268 	26 W	T1	3000 K	3210 lm	123 lm/W	•				7269-U-3-668-XX
			4000 K	3380 lm	130 lm/W	•				7269-U-3-669-XX
			3000 K	3210 lm	123 lm/W		•			7269-U-4-668-XX
			4000 K	3380 lm	130 lm/W		•			7269-U-4-669-XX
			3000 K	3210 lm	123 lm/W			•		7269-U-5-668-XX
			4000 K	3380 lm	130 lm/W			•		7269-U-5-669-XX
	26 W	T1	3000 K	3210 lm	123 lm/W				•	7269-U-A-668-XX
			4000 K	3380 lm	130 lm/W				•	7269-U-A-669-XX
			3000 K	3200 lm	123 lm/W	•				7269-V-3-668-XX
			4000 K	3360 lm	129 lm/W	•				7269-V-3-669-XX
			3000 K	3200 lm	123 lm/W		•			7269-V-4-668-XX
			4000 K	3360 lm	129 lm/W		•			7269-V-4-669-XX
	26 W	T5	3000 K	3200 lm	123 lm/W			•		7269-V-5-668-XX
			4000 K	3360 lm	129 lm/W			•		7269-V-5-669-XX
			3000 K	3200 lm	123 lm/W				•	7269-V-A-668-XX
			4000 K	3360 lm	129 lm/W				•	7269-V-A-669-XX
			3000 K	3090 lm	118 lm/W	•				7269-L-3-668-XX
			4000 K	3260 lm	125 lm/W	•				7269-L-3-669-XX
	26 W	T5	3000 K	3090 lm	118 lm/W		•			7269-L-4-668-XX
			4000 K	3260 lm	125 lm/W		•			7269-L-4-669-XX
			3000 K	3090 lm	118 lm/W			•		7269-L-5-668-XX
			4000 K	3260 lm	125 lm/W			•		7269-L-5-669-XX
			3000 K	3090 lm	118 lm/W				•	7269-L-A-668-XX
			4000 K	3260 lm	125 lm/W				•	7269-L-A-669-XX
	26 W	T5	3000 K	3310 lm	127 lm/W	•				7269-M-3-668-XX
			4000 K	3480 lm	133 lm/W	•				7269-M-3-669-XX
			3000 K	3310 lm	127 lm/W		•			7269-M-4-668-XX
			4000 K	3480 lm	133 lm/W		•			7269-M-4-669-XX
			3000 K	3310 lm	127 lm/W			•		7269-M-5-668-XX
			4000 K	3480 lm	133 lm/W			•		7269-M-5-669-XX
	36 W	T1	3000 K	4390 lm	121 lm/W				•	7269-M-A-668-XX
			4000 K	4630 lm	128 lm/W				•	7269-M-A-669-XX
			3000 K	4390 lm	121 lm/W	•				7269-U-3-666-XX
			4000 K	4630 lm	128 lm/W	•				7269-U-3-667-XX
			3000 K	4390 lm	121 lm/W		•			7269-U-4-666-XX
			4000 K	4630 lm	128 lm/W		•			7269-U-4-667-XX
	36 W	T1	3000 K	4390 lm	121 lm/W			•		7269-U-5-666-XX
			4000 K	4630 lm	128 lm/W			•		7269-U-5-667-XX
			3000 K	4390 lm	121 lm/W				•	7269-U-A-666-XX
			4000 K	4630 lm	128 lm/W				•	7269-U-A-667-XX
			3000 K	4370 lm	121 lm/W	•				7269-V-3-666-XX
			4000 K	4610 lm	128 lm/W	•				7269-V-3-667-XX
	36 W	T1	3000 K	4370 lm	121 lm/W		•			7269-V-4-666-XX
			4000 K	4610 lm	128 lm/W		•			7269-V-4-667-XX
			3000 K	4370 lm	121 lm/W			•		7269-V-5-666-XX
			4000 K	4610 lm	128 lm/W			•		7269-V-5-667-XX
			3000 K	4370 lm	121 lm/W				•	7269-V-A-666-XX
			4000 K	4610 lm	128 lm/W				•	7269-V-A-667-XX
	36 W	T5	3000 K	4230 lm	117 lm/W	•				7269-L-3-666-XX
			4000 K	4460 lm	123 lm/W	•				7269-L-3-667-XX
			3000 K	4230 lm	117 lm/W		•			7269-L-4-666-XX
			4000 K	4460 lm	123 lm/W		•			7269-L-4-667-XX
			3000 K	4230 lm	117 lm/W			•		7269-L-5-666-XX
			4000 K	4460 lm	123 lm/W			•		7269-L-5-667-XX
	36 W	T5	3000 K	4230 lm	117 lm/W				•	7269-L-A-666-XX
			4000 K	4460 lm	123 lm/W				•	7269-L-A-667-XX
			3000 K	4520 lm	125 lm/W	•				7269-M-3-666-XX
			4000 K	4770 lm	132 lm/W	•				7269-M-3-667-XX
			3000 K	4520 lm	125 lm/W		•			7269-M-4-666-XX
			4000 K	4770 lm	132 lm/W		•			7269-M-4-667-XX
	36 W	T5	3000 K	4520 lm	125 lm/W			•		7269-M-5-666-XX
			4000 K	4770 lm	132 lm/W			•		7269-M-5-667-XX
			3000 K	4520 lm	125 lm/W				•	7269-M-A-666-XX
			4000 K	4770 lm	132 lm/W				•	7269-M-A-667-XX

Typical Application



NEW Release PRIMUS

■ POLE MOUNTED

The design of **PRIMUS** is inspired by urban furniture elements. The distinctive circular shape with or without uplight shield adds a playful architectural option for urban spaces, walkways, parks and plazas. The excellent luminaire performance creates pleasant glare free illumination suitable for most pedestrian and bicycle ways. The clear version of **PRIMUS** with CAD optimized lens array allows highly energy efficient lighting schemes with wide luminaire spacing.

PRIMUS is suitable for pole diameters from Ø60mm to Ø76mm. The luminaire is equipped with a surge protection device and on request can be integrated in light management system by utilizing a Zhaga book 18 connector and DALI2 control gear.



Content
by Application



Content
by Family



PRIMUS



PRIMUS Opal



www.unilamp.co.th/en/p/primus


Specification

- High quality LED module and driver.
- designed, manufactured and tested according to IEC 60598.
- Stainless steel screws.
- Post-cured silicone gasket.
- Nano ceramic surface conversion.
- Polycarbonate protective cover.
- Double layer coating.
- Pre-wired cable from the factory.
- LM6 die cast aluminum and spun aluminum body.
- Shaded option for comfortable glare free illumination.
- Clear option with CAD optimized optical lenses.
- Prewired with 600mm long H05RN-F or equivalent cable
- Built-in pressure equalization element
- Installation work must carried out according to the enclosed product manual.


Available Color




****Custom colors are available on request.**

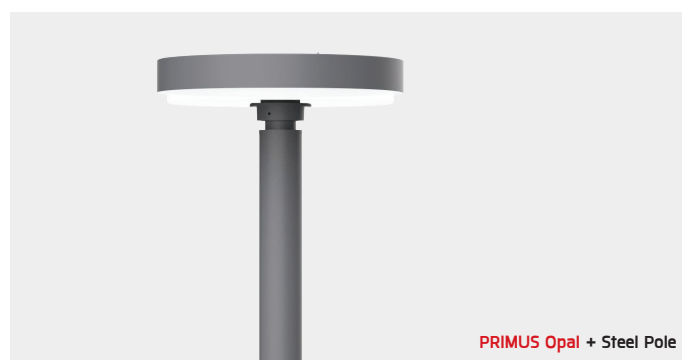

• MODULAR SOLUTIONS

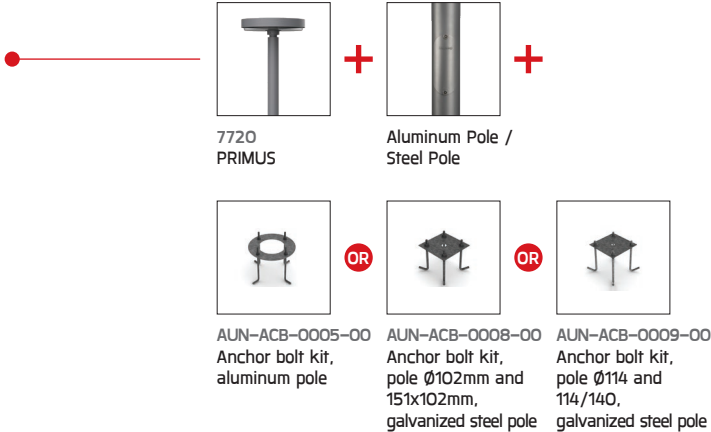

**Please see Poles & Anchor bolt section for pole mounting options*

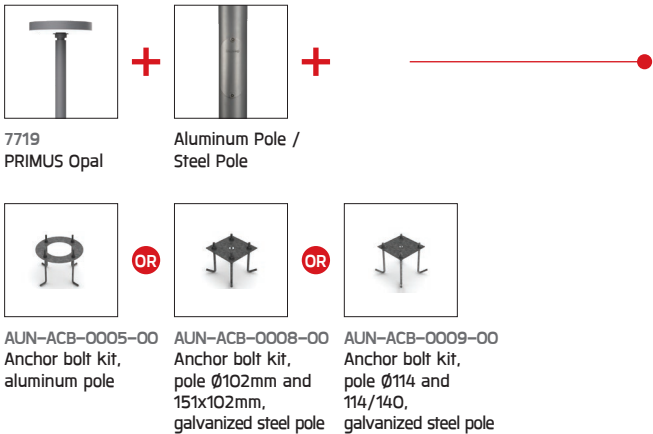


**Please see Poles & Anchor bolt section for pole mounting options*

Typical Application



Typical Application

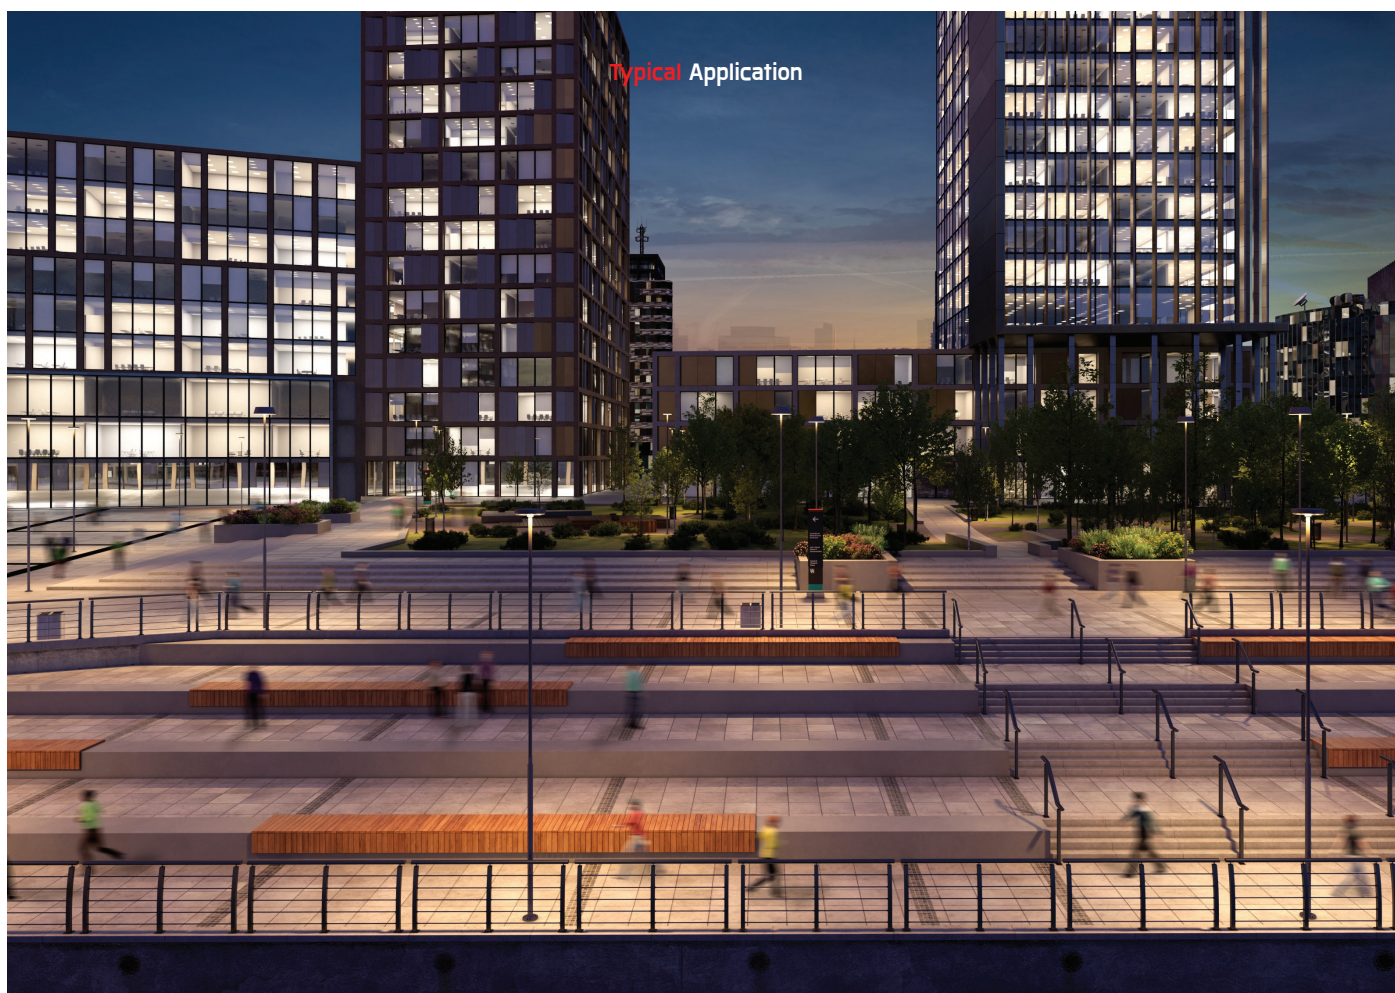

PRIMUS



PRIMUS Opal




* Pole is not included and has to be ordered separately.

PRIMUS




* Pole is not included and has to be ordered separately.




PRIMUS

NEW!

Application Type : Pole mounted
Subgroup : Urban ambient

PRIMUS Opal / 7719	
Luminaire Performance	
3150 – 4670 lm	
38 – 55 W	
80 – 87 lm/W	
Beam Options	
	
Color Temperature	
3000K/ 4000K	
Controller	
On-off/ DIM 1-10V/ DALI/ CASAMBI	
Input Voltage	
220-240VAC 50/60HZ	


Accessories



PRIMUS

NEW!

Application Type : Pole mounted
Subgroup : Urban area/ Urban ambient

PRIMUS / 7720	
Luminaire Performance	
5270 – 10250 lm	
44 – 67 W	
116 – 152 lm/W	
Beam Options	
	
Color Temperature	
3000K/ 4000K	
Controller	
On-off/ DIM 1-10V/ DALI/ CASAMBI	
Input Voltage	
220-240VAC 50/60HZ	

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code
										CASAMBI	
PRIMUS Opal	OD-7719 	38 W	T5	3000 K	3150 lm	82 lm/W	•				7719-L-3-458-XX
				4000 K	3320 lm	87 lm/W	•				7719-L-3-459-XX
				3000 K	3150 lm	82 lm/W		•			7719-L-4-458-XX
				4000 K	3320 lm	87 lm/W		•			7719-L-4-459-XX
				3000 K	3150 lm	82 lm/W			•		7719-L-5-458-XX
				4000 K	3320 lm	87 lm/W			•		7719-L-5-459-XX
		55 W	T5	3000 K	3150 lm	82 lm/W				•	7719-L-A-458-XX
				4000 K	3320 lm	87 lm/W				•	7719-L-A-459-XX
				3000 K	4420 lm	80 lm/W	•				7719-L-3-448-XX
				4000 K	4670 lm	84 lm/W	•				7719-L-3-449-XX
				3000 K	4420 lm	80 lm/W		•			7719-L-4-448-XX
				4000 K	4670 lm	84 lm/W		•			7719-L-4-449-XX
		55 W	T5	3000 K	4420 lm	80 lm/W			•		7719-L-5-448-XX
				4000 K	4670 lm	84 lm/W			•		7719-L-5-449-XX
				3000 K	4420 lm	80 lm/W				•	7719-L-A-448-XX
				4000 K	4670 lm	84 lm/W				•	7719-L-A-449-XX
PRIMUS	OD-7720 	44 W	T3	3000 K	5670 lm	128 lm/W	•				7720-J-3-666-XX
				4000 K	5970 lm	135 lm/W	•				7720-J-3-667-XX
				3000 K	5670 lm	128 lm/W		•			7720-J-4-666-XX
				4000 K	5970 lm	135 lm/W		•			7720-J-4-667-XX
				3000 K	5670 lm	128 lm/W			•		7720-J-5-666-XX
				4000 K	5970 lm	135 lm/W			•		7720-J-5-667-XX
		44 W	T4	3000 K	5670 lm	128 lm/W				•	7720-J-A-666-XX
				4000 K	5970 lm	135 lm/W				•	7720-J-A-667-XX
				3000 K	5270 lm	119 lm/W	•				7720-K-3-666-XX
				4000 K	5550 lm	126 lm/W	•				7720-K-3-667-XX
				3000 K	5270 lm	119 lm/W		•			7720-K-4-666-XX
				4000 K	5550 lm	126 lm/W		•			7720-K-4-667-XX
		50 W	T5	3000 K	5270 lm	119 lm/W			•		7720-K-5-666-XX
				4000 K	5550 lm	126 lm/W			•		7720-K-5-667-XX
				3000 K	5270 lm	119 lm/W				•	7720-K-A-666-XX
				4000 K	5550 lm	126 lm/W				•	7720-K-A-667-XX
				3000 K	7010 lm	140 lm/W	•				7720-L-3-666-XX
				4000 K	7400 lm	148 lm/W	•				7720-L-3-667-XX
		50 W	T5	3000 K	6670 lm	133 lm/W	•				7720-W-3-666-XX
				4000 K	7040 lm	140 lm/W	•				7720-W-3-667-XX
				3000 K	7010 lm	140 lm/W		•			7720-L-4-666-XX
				4000 K	7400 lm	148 lm/W		•			7720-L-4-667-XX
				3000 K	6670 lm	133 lm/W		•			7720-W-4-666-XX
				4000 K	7040 lm	140 lm/W		•			7720-W-4-667-XX
		50 W	T5	3000 K	7010 lm	140 lm/W			•		7720-L-5-666-XX
				4000 K	7400 lm	148 lm/W			•		7720-L-5-667-XX
				3000 K	6670 lm	133 lm/W			•		7720-W-5-666-XX
				4000 K	7040 lm	140 lm/W			•		7720-W-5-667-XX
				3000 K	7010 lm	140 lm/W				•	7720-L-A-666-XX
				4000 K	7400 lm	148 lm/W				•	7720-L-A-667-XX
		62 W	T3	3000 K	6670 lm	133 lm/W				•	7720-W-A-666-XX
				4000 K	7040 lm	140 lm/W				•	7720-W-A-667-XX
				3000 K	7900 lm	127 lm/W	•				7720-J-3-668-XX
				4000 K	8310 lm	134 lm/W	•				7720-J-3-669-XX
				3000 K	7900 lm	127 lm/W		•			7720-J-4-668-XX
				4000 K	8310 lm	134 lm/W		•			7720-J-4-669-XX
		62 W	T4	3000 K	7900 lm	127 lm/W			•		7720-J-5-668-XX
				4000 K	8310 lm	134 lm/W			•		7720-J-5-669-XX
				3000 K	7340 lm	118 lm/W	•				7720-K-3-668-XX
				4000 K	7720 lm	124 lm/W	•				7720-K-3-669-XX
				3000 K	7340 lm	118 lm/W		•			7720-K-4-668-XX
				4000 K	7720 lm	124 lm/W		•			7720-K-4-669-XX
		63 W	T3	3000 K	7340 lm	118 lm/W			•		7720-K-5-668-XX
				4000 K	7720 lm	124 lm/W			•		7720-K-5-669-XX
				3000 K	7900 lm	125 lm/W				•	7720-J-A-668-XX
				4000 K	8310 lm	131 lm/W				•	7720-J-A-669-XX
				3000 K	7340 lm	116 lm/W				•	7720-K-A-668-XX
				4000 K	7720 lm	122 lm/W				•	7720-K-A-669-XX
		67 W	T5	3000 K	9740 lm	145 lm/W	•				7720-L-3-668-XX
				4000 K	10250 lm	152 lm/W	•				7720-L-3-669-XX
				3000 K	9270 lm	138 lm/W	•				7720-W-3-668-XX
				4000 K	9760 lm	145 lm/W	•				7720-W-3-669-XX
				3000 K	9740 lm	145 lm/W		•			7720-L-4-668-XX
				4000 K	10250 lm	152 lm/W		•			7720-L-4-669-XX
		67 W	T5	3000 K	9270 lm	138 lm/W		•			7720-W-4-668-XX
				4000 K	9760 lm	145 lm/W		•			7720-W-4-669-XX
				3000 K	9740 lm	145 lm/W			•		7720-L-5-668-XX
				4000 K	10250 lm	152 lm/W			•		7720-L-5-669-XX
				3000 K	9270 lm	138 lm/W			•		7720-W-5-668-XX
				4000 K	9760 lm	145 lm/W			•		7720-W-5-669-XX
		67 W	T5	3000 K	9740 lm	145 lm/W				•	7720-L-A-668-XX
				4000 K	10250 lm	152 lm/W				•	7720-L-A-669-XX
				3000 K	9270 lm	138 lm/W				•	7720-W-A-668-XX
				4000 K	9760 lm	145 lm/W				•	7720-W-A-669-XX

*Please contact sales team for special request.

NEWLY Added PILLAR

- CATENARY LUMINAIRES
- BOLLARD
- LIGHT COLUMN
- WALL SURFACE MOUNT



Mini PILLAR
Catenary luminaires

PILLAR family is a cylindrical shaped light column, bollard and wall mount luminaire with unshielded and diffused symmetrical light distribution. This creates a uniform look throughout the lighting project. The classic slim shape is the perfect choice for small to large sized spaces. Its timeless design can be used with various architectural themes and blends equally well in parks. It is utilizing multiple LED with integrated constant current driver and surge protection device. State of the art dimming options are available as well as different color temperatures and wattage options.

The standard height of this luminaire is presented in this catalogue; however, it can be customized according to specific requirement. An anchorage unit is available as an accessory.



www.unilamp.co.th/en/p/pillar


Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum, cast aluminum and extruded aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- PMMA diffusing lens.
- Post-cured silicone gasket.
- High quality LED module and driver.
- GFR PA6.6 terminal block.
- Installation must be carried out according to the enclosed product manual.

Available Color




****Custom colors are available on request.**

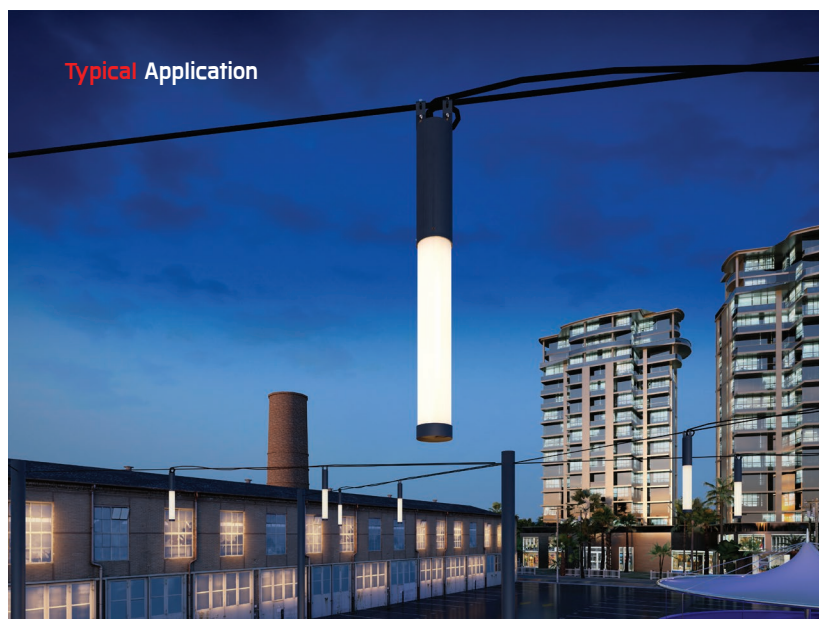

PILLAR



Mini PILLAR



Mini PILLAR



PILLAR

NEW!

Application Type : Catenary luminaires
Subgroup : Urban ambient

Mini PILLAR/ 1902	
Luminaire Performance	
810 – 860 lm	
14 W	
57 – 61 lm/W	
Beam Options	
	
Color Temperature	
3000K/ 4000K	
Controller	
On-off/ DALI	
Input Voltage	
220–240VAC 50/60HZ	

Accessories			
	IP68 Connector		Distribution box
	IP68 Connector		

PILLAR

Application Type : Bollard
Subgroup : General bollard


Mini PILLAR/ 7190	
Luminaire Performance	
810 – 860 lm	
14 W	
57 – 61 lm/W	
Beam Options	
	
Color Temperature	
3000K/ 4000K	
Controller	
On-off/ DALI	
Input Voltage	
220–240VAC 50/60HZ	

Accessories	
	Anchor bolt



PILLAR

Mini PILLAR



PILLAR

Application Type : Light column
Subgroup : Urban ambient

PILLAR/ 7219	
Mini PILLAR/ 7289	
Luminaire Performance	
	2100 – 6550 lm
	31 – 80 W
	67 – 83 lm/W
Beam Options	
Color Temperature	
	3000K/ 4000K
Controller	
	On-off/ DALI
Input Voltage	
	220–240VAC 50/60HZ


Accessories

Anchor bolt

PILLAR




Mini PILLAR



PILLAR	
Application Type : Wall surface mount	
Subgroup : General wall light	
Mini PILLAR/ 7590	
Luminaire Performance	
810 – 860 lm	
14 W	
57 – 61 lm/W	
Beam Options	
Color Temperature	
3000K/ 4000K	
Controller	
On-off/ DALI	
Input Voltage	
220–240VAC 50/60HZ	

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller			Ordering Code
										
Mini PILLAR	OD-1902	14 W	N/A	3000 K	810 lm	57 lm/W				1902-0-3-639-XX
	4000 K			860 lm	61 lm/W					
				3000 K	810 lm	57 lm/W				1902-0-5-639-XX
				4000 K	860 lm	61 lm/W				
PILLAR	OD-7190	14 W	N/A	3000 K	810 lm	57 lm/W				7190-0-3-639-XX
	4000 K			860 lm	61 lm/W					
				3000 K	810 lm	57 lm/W				7190-0-5-639-XX
				4000 K	860 lm	61 lm/W				
PILLAR	OD-7219	78 W	N/A	3000 K	6550 lm	83 lm/W				7219-0-3-937-XX
		80 W		4000 K	6020 lm	75 lm/W				
Mini PILLAR	OD-7289	31 W	N/A	3000 K	2100 lm	67 lm/W				7289-0-3-639-XX
	4000 K			2250 lm	72 lm/W					
				3000 K	2100 lm	67 lm/W				7289-0-5-639-XX
				4000 K	2250 lm	72 lm/W				
Mini PILLAR	OD-7590	14 W	N/A	3000 K	810 lm	57 lm/W				7590-0-3-639-XX
	4000 K			860 lm	61 lm/W					
				3000 K	810 lm	57 lm/W				7590-0-5-639-XX
				4000 K	860 lm	61 lm/W				

*Please contact sales team for special request.

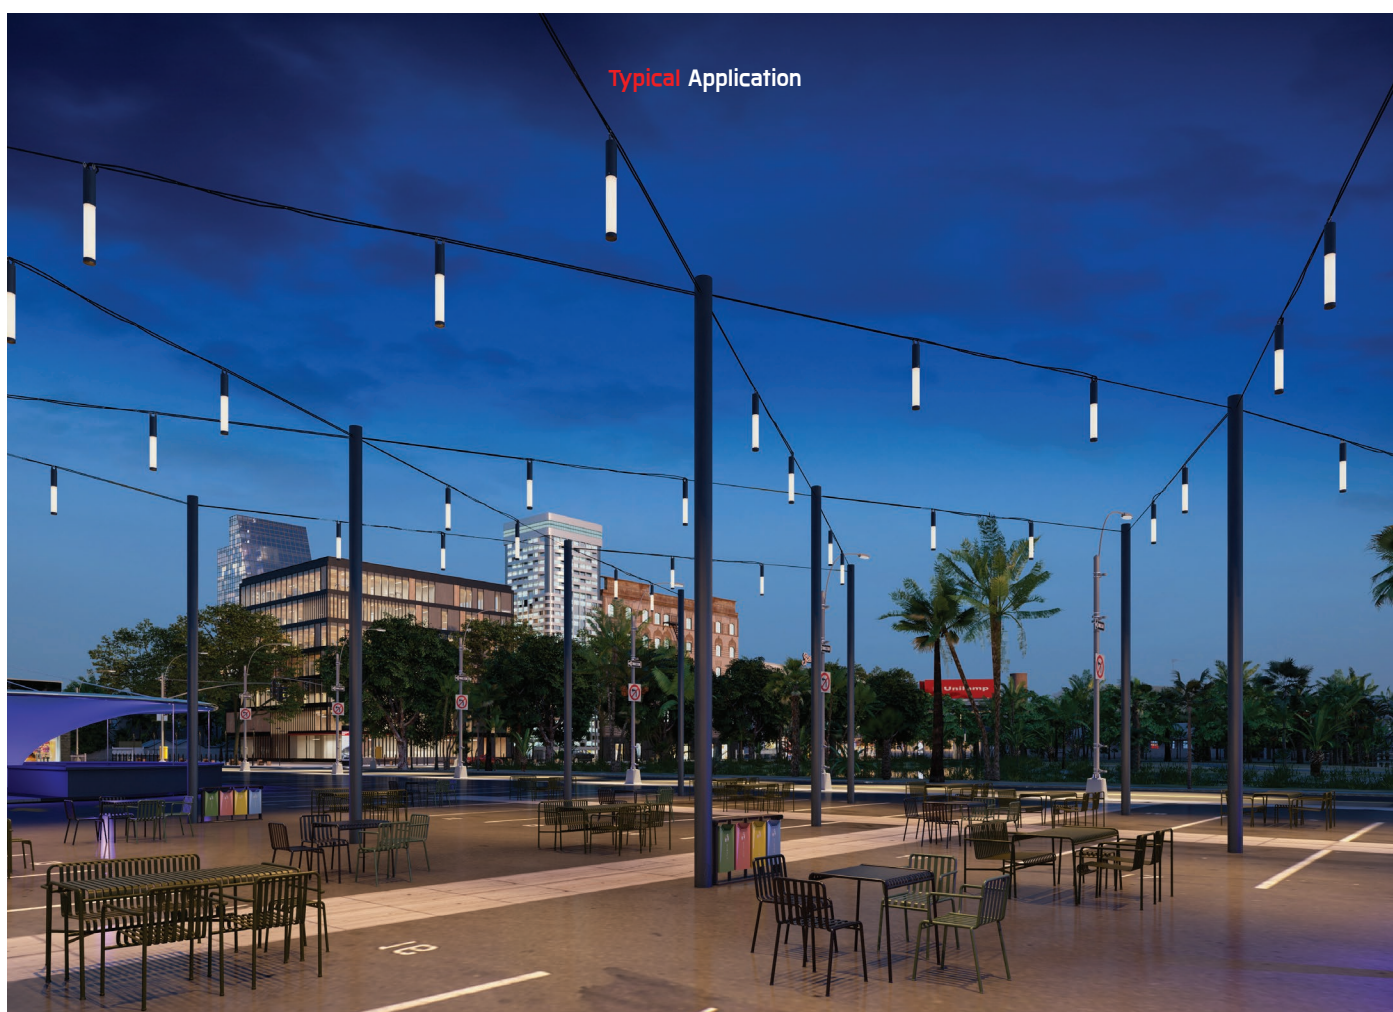


BICEPS

- BOLLARD
- LIGHT COLUMN



BICEPS is a light tower and bollard designed for architectural spaces with functional low glare light output. It is generally installed in walkways, parks, commercial areas and open spaces to illuminate the areas and give direction to people. It is designed and built for a high power COB LED utilizing top performance vacuum metalized reflector. It generates an even symmetrical downward light distribution and emits no upward light in accordance to light pollution regulation. Manufactured in impact resistant welded aluminum structure and maximized thermal management through integrated heat sink. Available in six colors and coated with Nano Ceramic film and super durable polyester powder. **BICEPS** is a bold statement to a modern landscape.

The new addition to **BICEPS** series. The new **BICEPS** pole light with asymmetric light distributions enables a wider installation spacing without compromising the visual comfort. The light column is available with single sided or double-sided light emission. The single sided configuration produces minimal amount of back lighting for comfortable glare free light installations. The minimized amount of up light makes **BICEPS** asymmetric suitable for sensitive lighting projects.

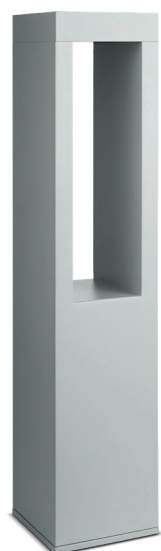

www.unilamp.co.th/en/p/biceps



Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum and extruded aluminum housing.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- GFR PA6.6 terminal block.
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.

Available Color




****Custom colors are available on request.**

BICEPS



BICEPS

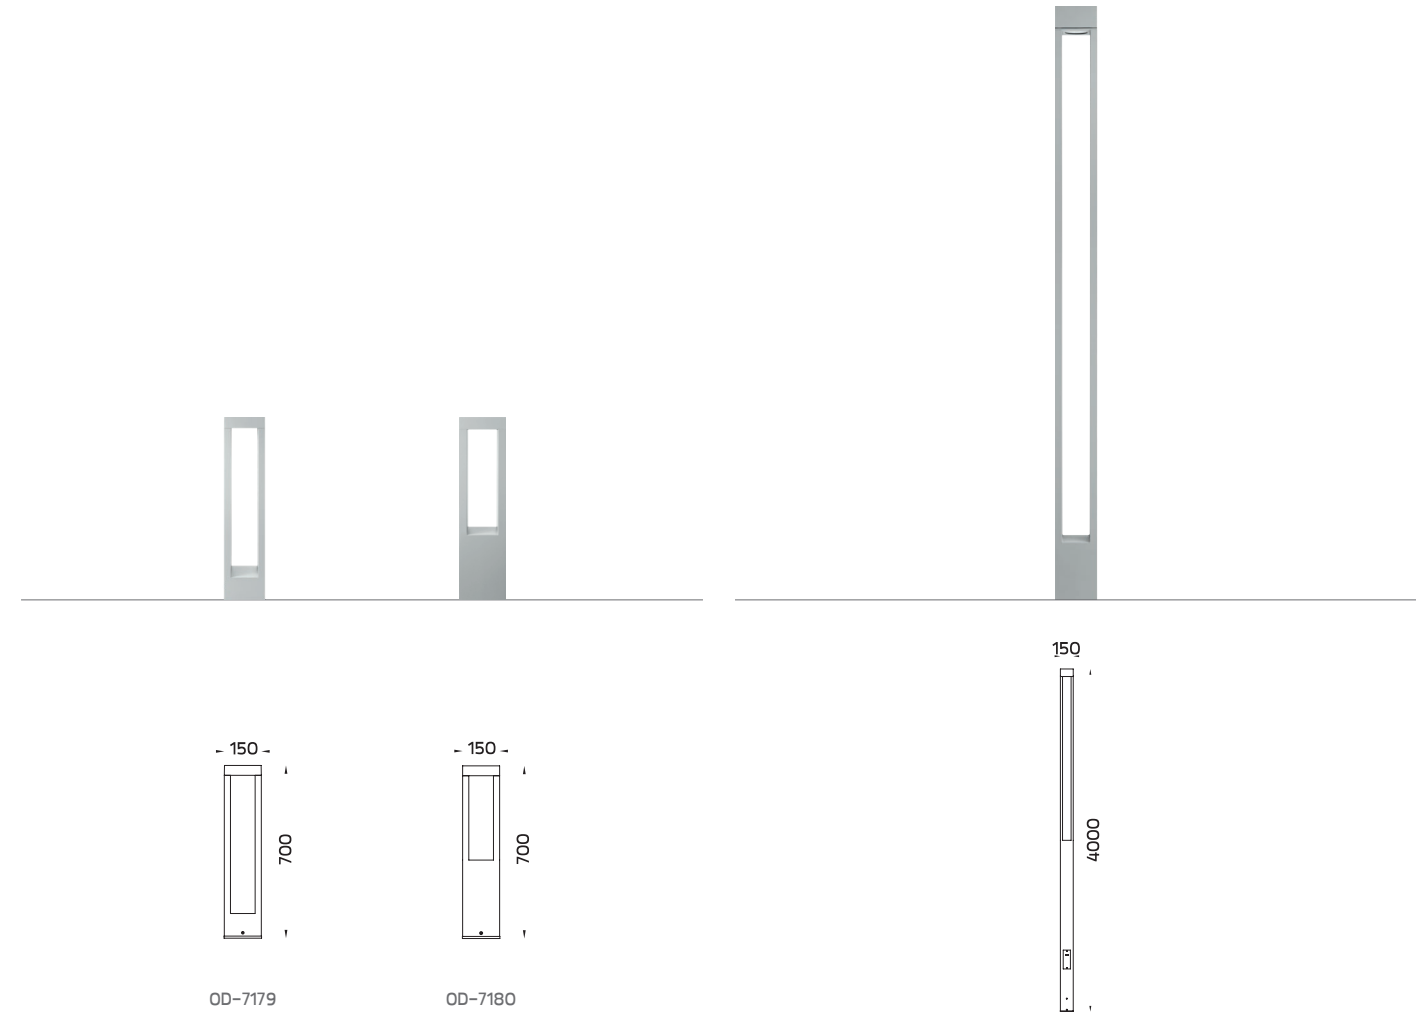

BICEPS

Application Type : Bollard
Subgroup : Shielded bollard

BICEPS / 7179 BICEPS / 7180	
Luminaire Performance	
	320 – 800 lm 10 – 25 W 29 – 39 lm/W
Beam Options	
Color Temperature	
	3000K/ 4000K
Controller	
	On-Off/ DALI On-Off [AC LED]
Input Options	
	220–240Vac 50/60Hz

Accessories

Anchor bolt

IP68 Connector

BICEPS

Application Type : Light column
Subgroup : Urban accent

BICEPS / 7710	
Luminaire Performance	
	1500 – 2780 lm 38 – 57 W 34 – 48 lm/W
Beam Options	
Color Temperature	
	2700K/ 3000K/ 4000K
Controller	
	On-Off/ 1-10V
Input Options	
	220–240Vac 50/60Hz


Accessories

Anchor bolt

IP68 Connector

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code
										
OD-7179 	10 W	N/A	4000 K	390 lm	39 lm/W		•			7179-0-3-870-XX
	11 W	N/A	3000 K	380 lm	34 lm/W		•			7179-0-3-869-XX
	20 W	N/A	3000 K	750 lm	37 lm/W		•			7179-0-3-873-XX
			4000 K	790 lm	39 lm/W		•			7179-0-3-874-XX
OD-7180 	10 W	N/A	4000 K	330 lm	33 lm/W		•			7180-0-3-870-XX
	11 W	N/A	3000 K	320 lm	29 lm/W		•			7180-0-3-869-XX
	20 W	N/A	3000 K	630 lm	31 lm/W		•			7180-0-3-873-XX
			4000 K	660 lm	33 lm/W		•			7180-0-3-874-XX
	25 W	N/A	3000 K	800 lm	32 lm/W	•				7180-0-3-902-XX
			3000 K	800 lm	32 lm/W				•	7180-0-5-902-XX
OD-7710 	38 W	N/A	3000 K	1790 lm	47 lm/W	•				7710-0-3-888-XX
	43 W	T4	3000 K	1500 lm	34 lm/W	•				7710-K-3-535-XX
			4000 K	1520 lm	35 lm/W	•				7710-T-3-536-XX
	57 W	N/A	3000 K	2650 lm	46 lm/W	•				7710-0-3-903-XX
			4000 K	2780 lm	48 lm/W	•				7710-0-3-906-XX
			2700 K	2200 lm	38 lm/W			•		7710-0-4-507-XX
			3000 K	2650 lm	46 lm/W			•		7710-0-4-903-XX

*Please contact sales team for special request.

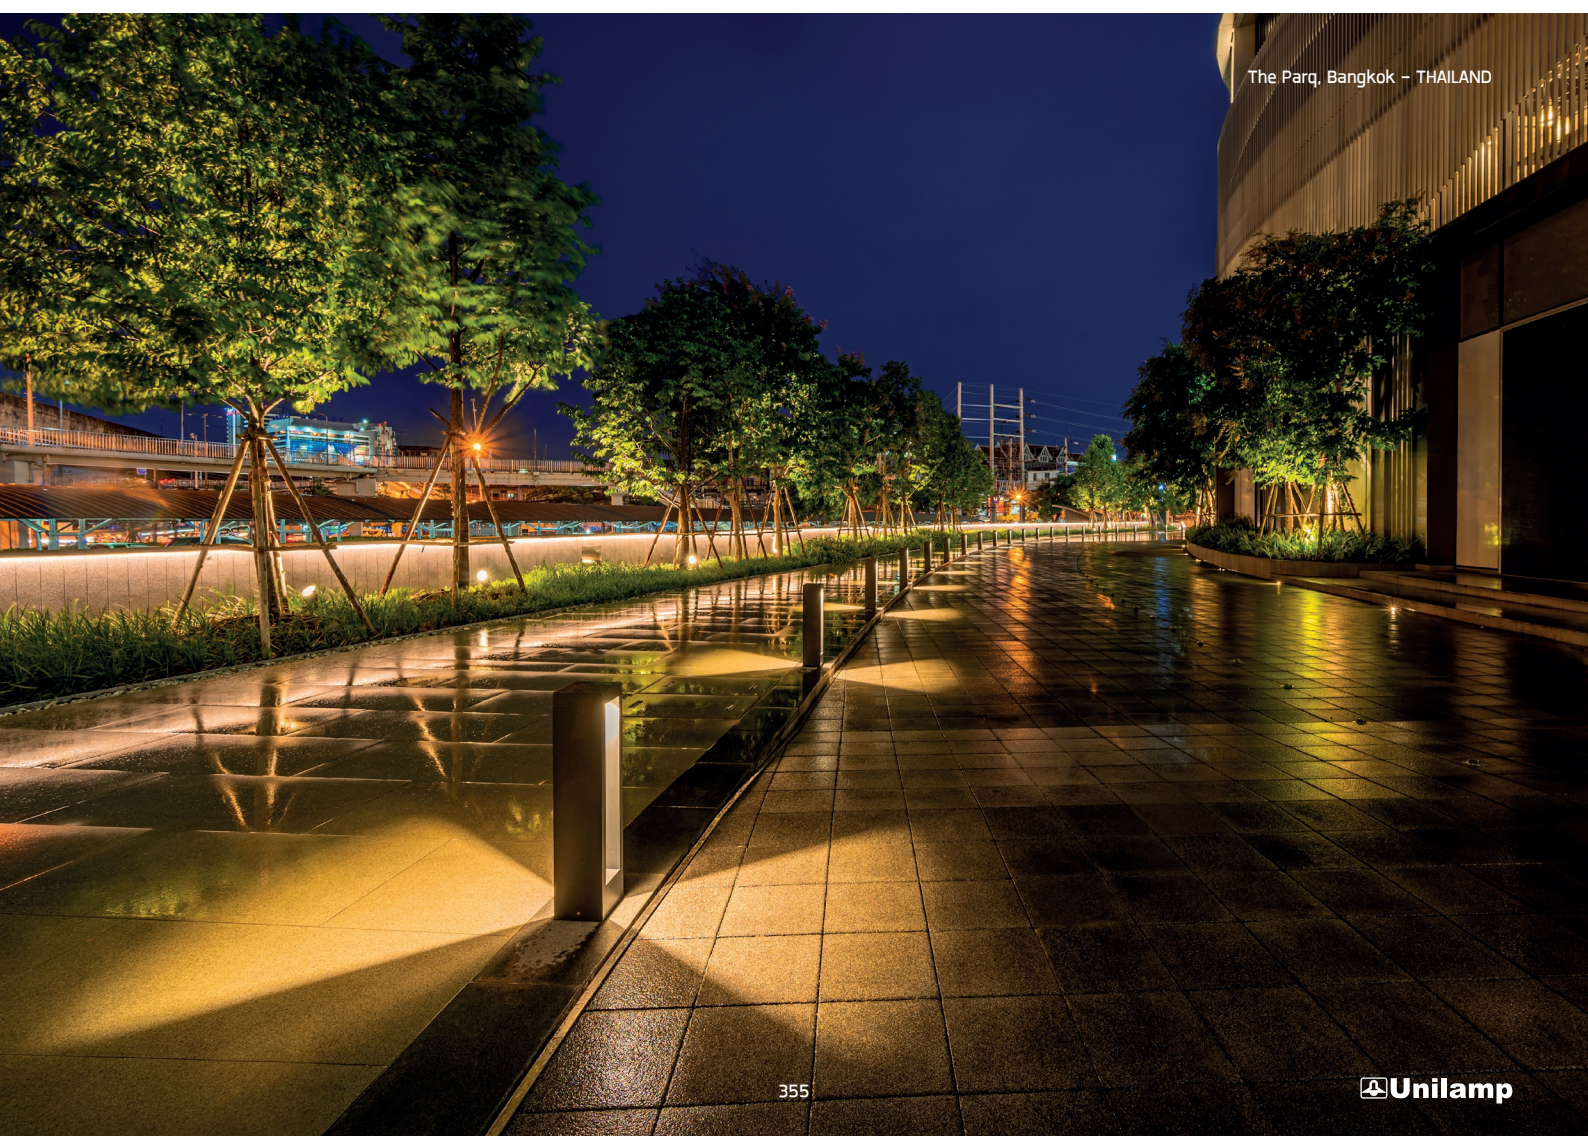

The Parq, Bangkok - THAILAND

NEOS

- PROJECTOR
- POLE MOUNTED



NEOS is a small sized high performing area light. Outstanding optical efficacy, high ambient temperature rating and a wide range of mounting accessory makes **NEOS** a highly competitive product. The smooth curved design eliminates accumulation of water and dust. The unobtrusive slim design is a great match for commercial and residential lighting tasks. The area light can be either equipped with a photocell, DALI-2 control or basic on-off control gear.

NEOS can be equipped with mounting accessories for pole integrated mounting, pole bracket, wall and wall corner. The pole bracket is suitable for Pole diameters up to 105 mm.



www.unilamp.co.th/en/p/neos

Specification



- Designed, manufactured and tested according to IEC 60598.
- High-pressure die cast aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.

Available Color




****Custom colors are available on request.**

Illumination level : 20 lux Ave.

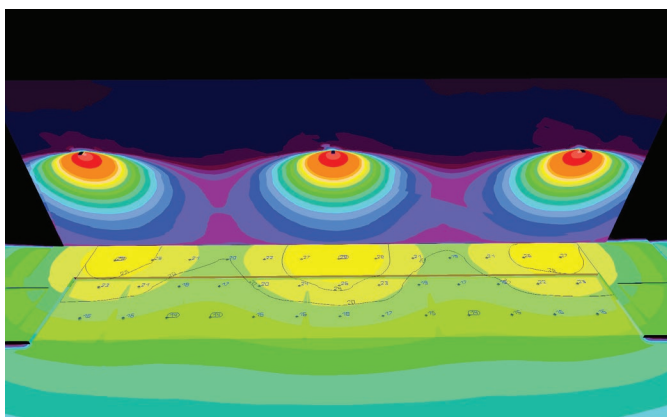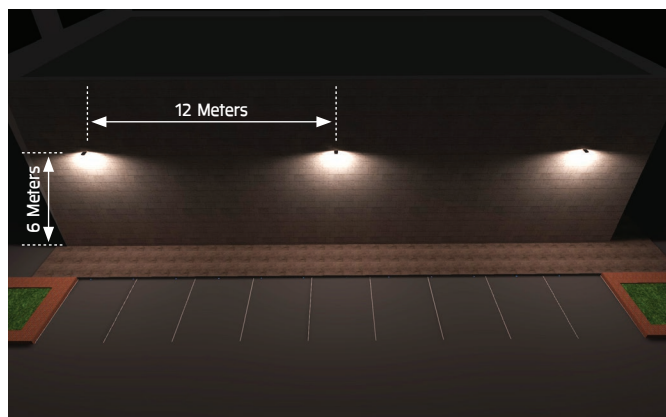


Infotar Office Building, Tallinn – ESTONIA

• MODULAR SOLUTIONS



- **Photo Cell**
for NEOS Flood Light /
NEOS Area Light
**Pre-assembly from factory*

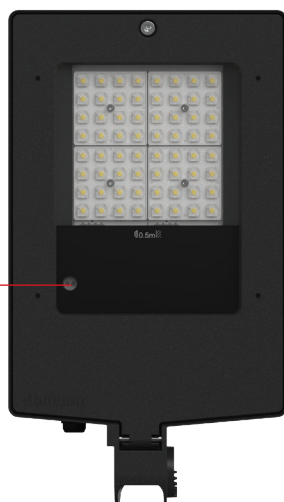

- **Glare Shield Cap**
for NEOS Flood Light /
NEOS Area Light

NEOS Projector

For Pole Mount Adaptor Configuration



2356
NEOS







- Pole mount adaptor for rectangular pole.
- Pole mount adaptor for pole dia 60mm.
- Pole mount adaptor for pole dia 76mm.
- Pole mount adaptor for pole dia 102-105mm.

• MODULAR SOLUTIONS


NEOS Projector

For Ground Mount / Wall Mount Configuration

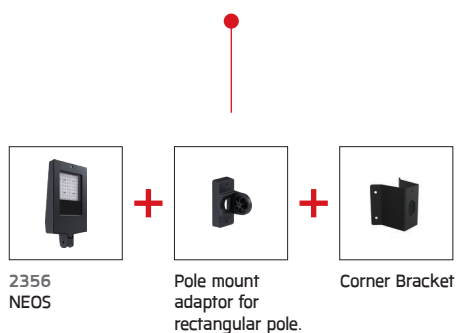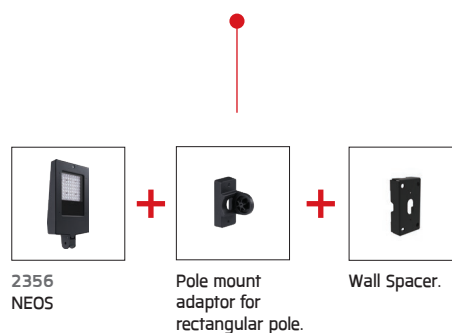

• MODULAR SOLUTIONS

NEOS – Pole mounted
Single Sided/ Double Sided

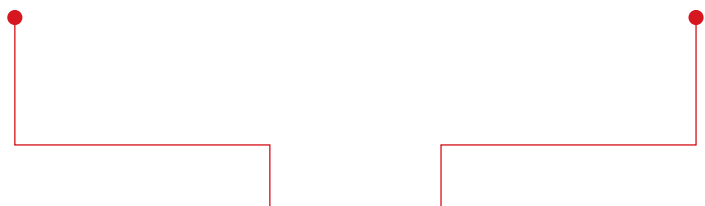

7246
NEOS
Single Sided

OR



7247
NEOS
Double Sided

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor bolt kit,
aluminum pole

OR



AUN-ACB-0008-00
Anchor bolt kit,
pole Ø102mm and
151x102mm,
galvanized steel pole

OR



AUN-ACB-0009-00
Anchor bolt kit,
pole Ø114 and
114/140,
galvanized steel pole


• MODULAR SOLUTIONS

				
Accessory		NEOS – Projector	NEOS – Pole mounted / Single Sided	NEOS – Pole mounted / Double Sided
	Photo Cell – Control one luminaire. [Pre-assembly from factory].	•	•	•
	Glare Shield Cap.	•	•	•
	Pole mount adaptor for rectangular pole.	•	–	–
	Pole mount adaptor for pole dia 60 mm.	•	–	–
	Pole mount adaptor for pole dia 76 mm.	•	–	–
	Pole mount adaptor for pole dia 102–105 mm.	•	–	–
	Ground mount base or Wall mount base.	•	–	–
	Turnable round base for Ground mount or Wall mount.	•	–	–
	Wall Spacer.	•	–	–
	Corner Bracket.	•	–	–
	Anchor Bolt Kit for Aluminum Pole	–	•	•
	Anchor Bolt Kit for Galvanized Steel Pole. [for Diameter 102mm. and 151x102mm.]	–	•	•
	Anchor Bolt Kit for Galvanized Steel Pole. [for pole Diameter 114mm. and Diameter 114&140mm.]	–	•	•
	Aluminum Pole Diameter 105 mm. Height 3000 mm. / 3500 mm. / 4000 mm. with Spigot Size 76 mm.	–	•	•
	Steel Pole Diameter 114 mm. Height 6000mm. / Steel Pole Diameter 140&114 mm. Height 7000 mm. / 8000 mm. with Spigot Size 76 mm.	–	•	•

NEOS



NEOS



NEOS

Application Type : Projector
Subgroup : Rectangular

NEOS/ 2356	
Luminaire Performance	
3050 – 5150 lm	
25 – 34 W	
122 – 151 lm/W	
Beam Options	
Wide	T1
T2	T3
Color Temperature	
3000K/ 4000K	
Controller	
On-off/ 1-10V/ DALI/ CASAMBI	
Input Voltage	
220-240VAC 50/60HZ	



Accessories			
	Pole mount		Ground mount / Wall mount
	Corner Bracket		Turnable round base
	IP68 Connector		Photo Cell
	Wall Spacer		Glare Shield Cap



NEOS



NEOS – DS

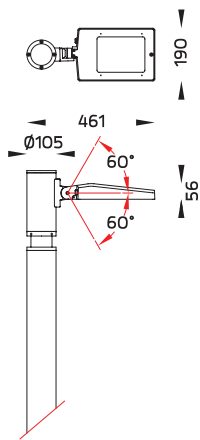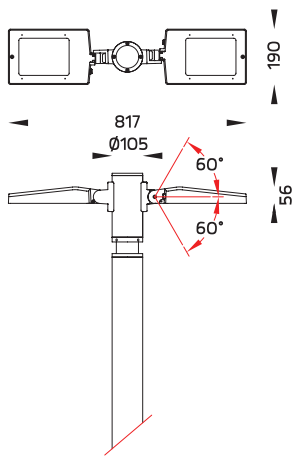

NEOS

Application Type : Pole mounted
Subgroup : Urban ambient/ Urban area

NEOS/ 7246	
NEOS – DS/ 7247	
Luminaire Performance	
3050 – 10300 lm	
25 – 68 W	
122 – 151 lm/W	
Beam Options	
Wide	T1 T2 T3
Color Temperature	
3000K/ 4000K	
Controller	
On-off/ 1-10V/ DALI/ CASAMBI	
Input Voltage	
220-240VAC 50/60HZ	

Accessories			
	Aluminum pole		Steel pole
	Glare Shield Cap		IP68 Connector
	Anchor Bolt		Photo Cell

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code
										CASAMBI	
NEOS	OD-2356 	25 W	90°	3000 K	3570 lm	142 lm/W	•				2356-E-3-668-XX
				4000 K	3760 lm	150 lm/W	•				2356-E-3-669-XX
				3000 K	3570 lm	142 lm/W		•			2356-E-4-668-XX
				4000 K	3760 lm	150 lm/W		•			2356-E-4-669-XX
				3000 K	3570 lm	142 lm/W			•		2356-E-5-668-XX
				4000 K	3760 lm	150 lm/W			•		2356-E-5-669-XX
		25 W	T1	3000 K	3570 lm	142 lm/W				•	2356-E-A-668-XX
				4000 K	3760 lm	150 lm/W				•	2356-E-A-669-XX
				3000 K	3300 lm	132 lm/W	•				2356-U-3-668-XX
				4000 K	3470 lm	138 lm/W	•				2356-U-3-669-XX
				3000 K	3300 lm	132 lm/W		•			2356-U-4-668-XX
				4000 K	3470 lm	138 lm/W		•			2356-U-4-669-XX
		25 W	T2	3000 K	3300 lm	132 lm/W			•		2356-U-5-668-XX
				4000 K	3470 lm	138 lm/W			•		2356-U-5-669-XX
				3000 K	3300 lm	132 lm/W				•	2356-U-A-668-XX
				4000 K	3470 lm	138 lm/W				•	2356-U-A-669-XX
				3000 K	3400 lm	136 lm/W	•				2356-I-3-668-XX
				4000 K	3570 lm	142 lm/W	•				2356-I-3-669-XX
		25 W	T3	3000 K	3400 lm	136 lm/W		•			2356-I-4-668-XX
				4000 K	3570 lm	142 lm/W		•			2356-I-4-669-XX
				3000 K	3400 lm	136 lm/W			•		2356-I-5-668-XX
				4000 K	3570 lm	142 lm/W			•		2356-I-5-669-XX
				3000 K	3400 lm	136 lm/W				•	2356-I-A-668-XX
				4000 K	3570 lm	142 lm/W				•	2356-I-A-669-XX
		25 W	T3	3000 K	3050 lm	122 lm/W	•				2356-J-3-668-XX
				4000 K	3210 lm	128 lm/W	•				2356-J-3-669-XX
				3000 K	3050 lm	122 lm/W		•			2356-J-4-668-XX
				4000 K	3210 lm	128 lm/W		•			2356-J-4-669-XX
				3000 K	3050 lm	122 lm/W			•		2356-J-5-668-XX
				4000 K	3210 lm	128 lm/W			•		2356-J-5-669-XX
		34 W	90°	3000 K	3050 lm	122 lm/W				•	2356-J-A-668-XX
				4000 K	3210 lm	128 lm/W				•	2356-J-A-669-XX
				3000 K	4870 lm	143 lm/W	•				2356-E-3-666-XX
				4000 K	5150 lm	151 lm/W	•				2356-E-3-667-XX
				3000 K	4870 lm	143 lm/W		•			2356-E-4-666-XX
				4000 K	5150 lm	151 lm/W		•			2356-E-4-667-XX
		34 W	T1	3000 K	4870 lm	143 lm/W			•		2356-E-5-666-XX
				4000 K	5150 lm	151 lm/W			•		2356-E-5-667-XX
				3000 K	4870 lm	143 lm/W				•	2356-E-A-666-XX
				4000 K	5150 lm	151 lm/W				•	2356-E-A-667-XX
				3000 K	4500 lm	132 lm/W	•				2356-U-3-666-XX
				4000 K	4760 lm	140 lm/W	•				2356-U-3-667-XX
		34 W	T2	3000 K	4500 lm	132 lm/W		•			2356-U-4-666-XX
				4000 K	4760 lm	140 lm/W		•			2356-U-4-667-XX
				3000 K	4500 lm	132 lm/W			•		2356-U-5-666-XX
				4000 K	4760 lm	140 lm/W			•		2356-U-5-667-XX
				3000 K	4500 lm	132 lm/W				•	2356-U-A-666-XX
				4000 K	4760 lm	140 lm/W				•	2356-U-A-667-XX
		34 W	T3	3000 K	4640 lm	136 lm/W	•				2356-I-3-666-XX
				4000 K	4900 lm	144 lm/W	•				2356-I-3-667-XX
				3000 K	4640 lm	136 lm/W		•			2356-I-4-666-XX
				4000 K	4900 lm	144 lm/W		•			2356-I-4-667-XX
				3000 K	4640 lm	136 lm/W			•		2356-I-5-666-XX
				4000 K	4900 lm	144 lm/W			•		2356-I-5-667-XX
		34 W	T3	3000 K	4640 lm	136 lm/W				•	2356-I-A-666-XX
				4000 K	4900 lm	144 lm/W				•	2356-I-A-667-XX
				3000 K	4160 lm	122 lm/W	•				2356-J-3-666-XX
				4000 K	4400 lm	129 lm/W	•				2356-J-3-667-XX
				3000 K	4160 lm	122 lm/W		•			2356-J-4-666-XX
				4000 K	4400 lm	129 lm/W		•			2356-J-4-667-XX
		34 W	T3	3000 K	4160 lm	122 lm/W			•		2356-J-5-666-XX
				4000 K	4400 lm	129 lm/W			•		2356-J-5-667-XX
				3000 K	4160 lm	122 lm/W				•	2356-J-A-666-XX
				4000 K	4400 lm	129 lm/W				•	2356-J-A-667-XX

*Please contact sales team for special request.

NEOS	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code
											
NEOS	OD-7246 	25 W	90°	3000 K	3570 lm	142 lm/W	•				7246-E-3-668-XX
				4000 K	3760 lm	150 lm/W	•				7246-E-3-669-XX
				3000 K	3570 lm	142 lm/W		•			7246-E-4-668-XX
				4000 K	3760 lm	150 lm/W		•			7246-E-4-669-XX
				3000 K	3570 lm	142 lm/W			•		7246-E-5-668-XX
				4000 K	3760 lm	150 lm/W			•		7246-E-5-669-XX
		25 W	T1	3000 K	3570 lm	142 lm/W				•	7246-E-A-668-XX
				4000 K	3760 lm	150 lm/W				•	7246-E-A-669-XX
				3000 K	3300 lm	132 lm/W	•				7246-U-3-668-XX
				4000 K	3470 lm	138 lm/W	•				7246-U-3-669-XX
				3000 K	3300 lm	132 lm/W		•			7246-U-4-668-XX
				4000 K	3470 lm	138 lm/W		•			7246-U-4-669-XX
				3000 K	3300 lm	132 lm/W			•		7246-U-5-668-XX
				4000 K	3470 lm	138 lm/W			•		7246-U-5-669-XX
				3000 K	3300 lm	132 lm/W				•	7246-U-A-668-XX
				4000 K	3470 lm	138 lm/W				•	7246-U-A-669-XX
		25 W	T2	3000 K	3400 lm	136 lm/W	•				7246-I-3-668-XX
				4000 K	3570 lm	142 lm/W	•				7246-I-3-669-XX
				3000 K	3400 lm	136 lm/W		•			7246-I-4-668-XX
				4000 K	3570 lm	142 lm/W		•			7246-I-4-669-XX
				3000 K	3400 lm	136 lm/W			•		7246-I-5-668-XX
				4000 K	3570 lm	142 lm/W			•		7246-I-5-669-XX
				3000 K	3400 lm	136 lm/W				•	7246-I-A-668-XX
				4000 K	3570 lm	142 lm/W				•	7246-I-A-669-XX
			T3	3000 K	3050 lm	122 lm/W	•				7246-J-3-668-XX
				4000 K	3210 lm	128 lm/W	•				7246-J-3-669-XX
				3000 K	3050 lm	122 lm/W		•			7246-J-4-668-XX
				4000 K	3210 lm	128 lm/W		•			7246-J-4-669-XX
				3000 K	3050 lm	122 lm/W			•		7246-J-5-668-XX
				4000 K	3210 lm	128 lm/W			•		7246-J-5-669-XX
				3000 K	3050 lm	122 lm/W				•	7246-J-A-668-XX
				4000 K	3210 lm	128 lm/W				•	7246-J-A-669-XX
		34 W	90°	3000 K	4870 lm	143 lm/W	•				7246-E-3-666-XX
				4000 K	5150 lm	151 lm/W	•				7246-E-3-667-XX
				3000 K	4870 lm	143 lm/W		•			7246-E-4-666-XX
				4000 K	5150 lm	151 lm/W		•			7246-E-4-667-XX
				3000 K	4870 lm	143 lm/W			•		7246-E-5-666-XX
				4000 K	5150 lm	151 lm/W			•		7246-E-5-667-XX
				3000 K	4870 lm	143 lm/W				•	7246-E-A-666-XX
				4000 K	5150 lm	151 lm/W				•	7246-E-A-667-XX
		34 W	T1	3000 K	4500 lm	132 lm/W	•				7246-U-3-666-XX
				4000 K	4760 lm	140 lm/W	•				7246-U-3-667-XX
				3000 K	4500 lm	132 lm/W		•			7246-U-4-666-XX
				4000 K	4760 lm	140 lm/W		•			7246-U-4-667-XX
				3000 K	4500 lm	132 lm/W			•		7246-U-5-666-XX
				4000 K	4760 lm	140 lm/W			•		7246-U-5-667-XX
				3000 K	4500 lm	132 lm/W				•	7246-U-A-666-XX
				4000 K	4760 lm	140 lm/W				•	7246-U-A-667-XX
		34 W	T2	3000 K	4640 lm	136 lm/W	•				7246-I-3-666-XX
				4000 K	4900 lm	144 lm/W	•				7246-I-3-667-XX
				3000 K	4640 lm	136 lm/W		•			7246-I-4-666-XX
				4000 K	4900 lm	144 lm/W		•			7246-I-4-667-XX
				3000 K	4640 lm	136 lm/W			•		7246-I-5-666-XX
				4000 K	4900 lm	144 lm/W			•		7246-I-5-667-XX
				3000 K	4640 lm	136 lm/W				•	7246-I-A-666-XX
				4000 K	4900 lm	144 lm/W				•	7246-I-A-667-XX
		34 W	T3	3000 K	4160 lm	122 lm/W	•				7246-J-3-666-XX
				4000 K	4400 lm	129 lm/W	•				7246-J-3-667-XX
				3000 K	4160 lm	122 lm/W		•			7246-J-4-666-XX
				4000 K	4400 lm	129 lm/W		•			7246-J-4-667-XX
				3000 K	4160 lm	122 lm/W			•		7246-J-5-666-XX
				4000 K	4400 lm	129 lm/W			•		7246-J-5-667-XX
				3000 K	4160 lm	122 lm/W				•	7246-J-A-666-XX
				4000 K	4400 lm	129 lm/W				•	7246-J-A-667-XX

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code
										
OD-7247 	50 W	90°	3000 K	7140 lm	142 lm/W	•				7247-E-3-668-XX
			4000 K	7520 lm	150 lm/W	•				7247-E-3-669-XX
			3000 K	7140 lm	142 lm/W		•			7247-E-4-668-XX
			4000 K	7520 lm	150 lm/W		•			7247-E-4-669-XX
			3000 K	7140 lm	142 lm/W			•		7247-E-5-668-XX
			4000 K	7520 lm	150 lm/W			•		7247-E-5-669-XX
	50 W	T1	3000 K	7140 lm	142 lm/W				•	7247-E-A-668-XX
			4000 K	7520 lm	150 lm/W				•	7247-E-A-669-XX
			3000 K	6600 lm	132 lm/W	•				7247-U-3-668-XX
			4000 K	6940 lm	138 lm/W	•				7247-U-3-669-XX
			3000 K	6600 lm	132 lm/W		•			7247-U-4-668-XX
			4000 K	6940 lm	138 lm/W		•			7247-U-4-669-XX
	50 W	T2	3000 K	6600 lm	132 lm/W			•		7247-U-5-668-XX
			4000 K	6940 lm	138 lm/W			•		7247-U-5-669-XX
			3000 K	6600 lm	132 lm/W				•	7247-U-A-668-XX
			4000 K	6940 lm	138 lm/W				•	7247-U-A-669-XX
			3000 K	6800 lm	136 lm/W	•				7247-I-3-668-XX
			4000 K	7140 lm	142 lm/W	•				7247-I-3-669-XX
	50 W	T3	3000 K	6800 lm	136 lm/W		•			7247-I-4-668-XX
			4000 K	7140 lm	142 lm/W		•			7247-I-4-669-XX
			3000 K	6800 lm	136 lm/W			•		7247-I-5-668-XX
			4000 K	7140 lm	142 lm/W			•		7247-I-5-669-XX
			3000 K	6800 lm	136 lm/W				•	7247-I-A-668-XX
			4000 K	7140 lm	142 lm/W				•	7247-I-A-669-XX
	68 W	90°	3000 K	6100 lm	122 lm/W	•				7247-J-3-668-XX
			4000 K	6420 lm	128 lm/W	•				7247-J-3-669-XX
			3000 K	6100 lm	122 lm/W		•			7247-J-4-668-XX
			4000 K	6420 lm	128 lm/W		•			7247-J-4-669-XX
			3000 K	6100 lm	122 lm/W			•		7247-J-5-668-XX
			4000 K	6420 lm	128 lm/W			•		7247-J-5-669-XX
	68 W	T1	3000 K	6100 lm	122 lm/W				•	7247-J-A-668-XX
			4000 K	6420 lm	128 lm/W				•	7247-J-A-669-XX
			3000 K	9740 lm	143 lm/W	•				7247-E-3-666-XX
			4000 K	10300 lm	151 lm/W	•				7247-E-3-667-XX
			3000 K	9740 lm	143 lm/W		•			7247-E-4-666-XX
			4000 K	10300 lm	151 lm/W		•			7247-E-4-667-XX
	68 W	T2	3000 K	9740 lm	143 lm/W			•		7247-E-5-666-XX
			4000 K	10300 lm	151 lm/W			•		7247-E-5-667-XX
			3000 K	9740 lm	143 lm/W				•	7247-E-A-666-XX
			4000 K	10300 lm	151 lm/W				•	7247-E-A-667-XX
			3000 K	9000 lm	132 lm/W	•				7247-U-3-666-XX
			4000 K	9520 lm	140 lm/W	•				7247-U-3-667-XX
	68 W	T3	3000 K	9000 lm	132 lm/W		•			7247-U-4-666-XX
			4000 K	9520 lm	140 lm/W		•			7247-U-4-667-XX
			3000 K	9000 lm	132 lm/W			•		7247-U-5-666-XX
			4000 K	9520 lm	140 lm/W			•		7247-U-5-667-XX
			3000 K	9000 lm	132 lm/W				•	7247-U-A-666-XX
			4000 K	9520 lm	140 lm/W				•	7247-U-A-667-XX
	68 W	T2	3000 K	9280 lm	136 lm/W	•				7247-I-3-666-XX
			4000 K	9800 lm	144 lm/W	•				7247-I-3-667-XX
			3000 K	9280 lm	136 lm/W		•			7247-I-4-666-XX
			4000 K	9800 lm	144 lm/W		•			7247-I-4-667-XX
			3000 K	9280 lm	136 lm/W			•		7247-I-5-666-XX
			4000 K	9800 lm	144 lm/W			•		7247-I-5-667-XX
	68 W	T3	3000 K	9280 lm	136 lm/W				•	7247-I-A-666-XX
			4000 K	9800 lm	144 lm/W				•	7247-I-A-667-XX
			3000 K	8320 lm	122 lm/W	•				7247-J-3-666-XX
			4000 K	8800 lm	129 lm/W	•				7247-J-3-667-XX
			3000 K	8320 lm	122 lm/W		•			7247-J-4-666-XX
			4000 K	8800 lm	129 lm/W		•			7247-J-4-667-XX
	68 W	T3	3000 K	8320 lm	122 lm/W			•		7247-J-5-666-XX
			4000 K	8800 lm	129 lm/W			•		7247-J-5-667-XX
			3000 K	8320 lm	122 lm/W				•	7247-J-A-666-XX
			4000 K	8800 lm	129 lm/W				•	7247-J-A-667-XX

Phoneix Market City Mall, Pune - INDIA



SIROCCO

- WALL SURFACE MOUNT
- POLE MOUNTED
- PROJECTOR



SIROCCO is a solid outdoor luminaire for public space illumination. Available in various light distribution, symmetric, asymmetric, bi-symmetric and road optic.

SIROCCO equipped with a high power LED with high CRI in 2700K, 3000K or 4000K color temperature with 3 SDCM. Lenses and reflectors for **SIROCCO** have been engineered utilizing the latest technology and software for maximum performance. The heat management has been delicately designed and tested under high ambient thermal condition. An integrated scale allows precise aiming of the luminaire to achieve the desired illumination level.

SIROCCO is suitable to illuminate medium to large size objects or areas such as signage boards, building facades, parking lots, public parks, pedestrian, small streets and squares. Presented with a range of mounting accessories including ground mount base, pole top mount, and wall/pole mounting arm as well as aluminum Poles, galvanized steel poles and anchorage unit for concrete foundations.



www.unilamp.co.th/en/p/sirocco


Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die-cast aluminum housing.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- High performance PC lens/ aluminum reflector.
- Post-cured silicone gasket.
- High quality LED module.
- Installation must be carried out according to the enclosed product manual.

Available Color



****Custom colors are available on request.**

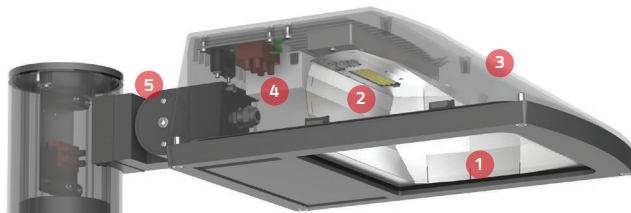

SIROCCO

- 1. Reflector**
High reflection CNC formed miro reflector.
- 2. LED**
Array of High power LED from world renowned manufacturer. Module attached directly to the body for fastest heat transfer. 3000K and 4000K CRI>80 3-Step SDCM.
- 3. Body Housing**
Enhanced LM6 Die-Cast Aluminum housing with 16-step coating process including nano ceramic film. Low copper content <0.1%
- 4. Driver**
High quality DALI and Dimmable Driver [1-10V] in constant current. Conform to applicable safety standards and electromagnetic compatibility.
- 5. Aiming**
Graduated scale with locking mechanism. Adjustable with Hexagon tool.



Keen Sriracha, Chonburi – THAILAND

SIROCCO



Small SIROCCO




Asymmetric



Bi-symmetric



Optic



SIROCCO

Application Type : Projector

Subgroup : Rectangular

Small SIROCCO / 2240

Small SIROCCO / 2241

Small SIROCCO / 2244

Luminaire Performance

4740 – 8120 lm

57 – 80 W

76 – 102 lm/W

Beam Options



Color Temperature

3000K/ 4000K

Controller

On-off/ 1-10V/ DALI

Input Voltage

220-240VAC 50/60HZ

Accessories



Mounting base



Pole top mount adaptor



Wall/ Pole mount arm



Pole clamp



Aluminum pole



Steel pole




Anchor bolt



IP68 Connector



Small SIROCCO



SIROCCO


Application Type : Wall surface mount
Subgroup : Area wall light/ Directed wall light

Small SIROCCO / 2340	
Small SIROCCO / 2341	
Small SIROCCO / 2344	
Luminaire Performance	
4740 – 8920 lm	
57 – 84 W	
76 – 111 lm/W	
Beam Options	
Asymmetric	Bi-Symmetric
Road Optic	99°/13°
Color Temperature	
3000K/ 4000K	
Controller	
On-off/ 1-10V/ DALI	
Input Voltage	
220-240VAC 50/60HZ	

SIROCCO



Small SIROCCO

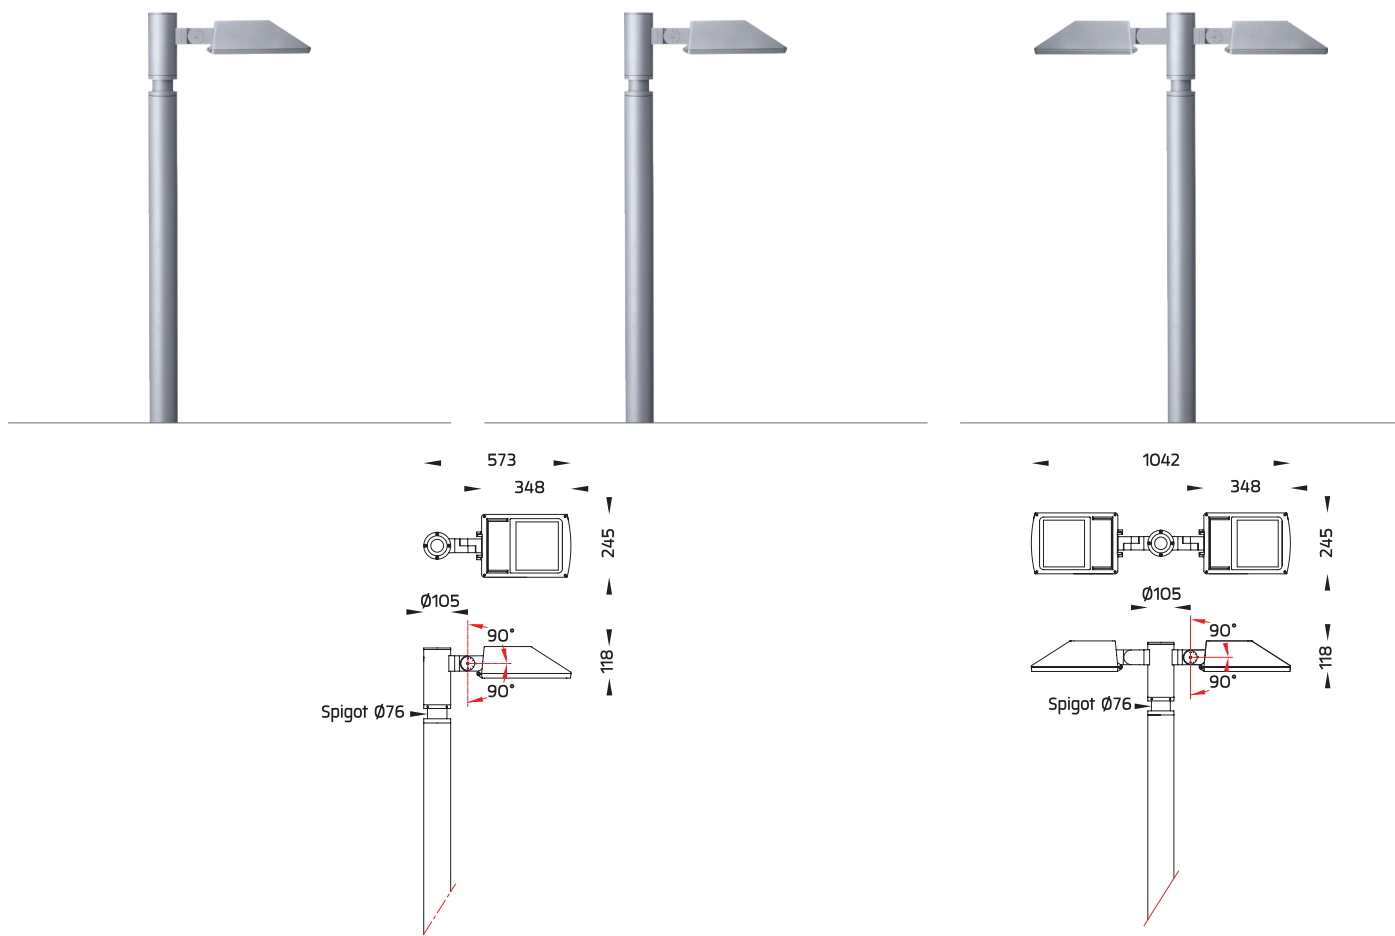

SIROCCO

Application Type : Pole mounted

Subgroup : Urban area/ Urban ambient

Small SIROCCO / 7240

Small SIROCCO / 7241

Small SIROCCO / 7242


Luminaire Performance

4740 - 16240 lm

59 - 160 W

79 - 102 lm/W

Beam Options



Color Temperature

3000K/ 4000K

Controller

On-off/ DALI

Input Voltage

220-240VAC 50/60HZ

Accessories



Aluminum pole



Steel pole




Anchor bolt

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller			Ordering Code	
											
Small SIROCCO / Small SIROCCO Optic	OD-2240		57 W	Asymmetric	3000 K	5230 lm	91 lm/W	•			2240-K-3-674-XX
	59 W		Asymmetric	4000 K	5980 lm	101 lm/W	•			2240-K-3-675-XX	
	60 W		Asymmetric	4000 K	5080 lm	84 lm/W	•			2240-1-3-907-XX	
				3000 K	4740 lm	79 lm/W	•			2240-1-3-929-XX	
				3000 K	4740 lm	79 lm/W		•		2240-1-4-929-XX	
	78 W		Asymmetric	4000 K	7310 lm	93 lm/W	•			2240-1-3-860-XX	
	80 W		Asymmetric	3000 K	8120 lm	101 lm/W	•			2240-1-3-859-XX	
				3000 K	6870 lm	85 lm/W	•			2240-K-3-671-XX	
				3000 K	6870 lm	85 lm/W			•	2240-K-5-671-XX	
	OD-2241		60 W	Bi-Symmetric	3000 K	5210 lm	86 lm/W	•			2241-7-3-929-XX
	78 W		Bi-Symmetric	4000 K	8020 lm	102 lm/W	•			2241-7-3-860-XX	
				4000 K	8020 lm	102 lm/W		•		2241-7-4-860-XX	
	80 W		12°	3000 K	7930 lm	99 lm/W	•			2241-A-3-671-XX	
	OD-2244		59 W	Road Optic	4000 K	5360 lm	90 lm/W	•			2244-I-3-675-XX
	80 W		3000 K		6150 lm	76 lm/W	•			2244-I-3-671-XX	
	OD-2340		57 W	Asymmetric	3000 K	5230 lm	91 lm/W	•			2340-K-3-674-XX
	60 W		Asymmetric	4000 K	5080 lm	84 lm/W	•			2340-1-3-907-XX	
				3000 K	4740 lm	79 lm/W	•			2340-1-3-929-XX	
	78 W		Asymmetric	4000 K	7310 lm	93 lm/W	•			2340-1-3-860-XX	
				4000 K	7310 lm	93 lm/W			•	2340-1-5-860-XX	
	80 W		Asymmetric	3000 K	8120 lm	101 lm/W	•			2340-1-3-859-XX	
				3000 K	8120 lm	101 lm/W			•	2340-1-5-859-XX	
				3000 K	6870 lm	85 lm/W	•			2340-K-3-671-XX	
				3000 K	6870 lm	85 lm/W			•	2340-K-5-671-XX	
	84 W	Asymmetric	3000 K	8110 lm	96 lm/W	•			2340-K-3-672-XX		
OD-2341		57 W	99°/13°	3000 K	5310 lm	93 lm/W	•			2341-H-3-674-XX	
60 W		Bi-Symmetric	3000 K	5210 lm	86 lm/W	•			2341-7-3-929-XX		
			3000 K	5210 lm	86 lm/W		•		2341-7-4-929-XX		
80 W		Bi-Symmetric	3000 K	8920 lm	111 lm/W	•			2341-7-3-859-XX		
99°/13°	3000 K	6970 lm	87 lm/W	•			2341-H-3-671-XX				
OD-2344		59 W	Road Optic	4000 K	5360 lm	90 lm/W	•			2344-I-3-675-XX	
80 W		3000 K		6150 lm	76 lm/W			•	2344-I-5-671-XX		
OD-7240		59 W	Asymmetric	4000 K	5980 lm	101 lm/W	•			7240-K-3-675-XX	
60 W		Asymmetric	4000 K	5080 lm	84 lm/W	•			7240-1-3-907-XX		
			3000 K	4740 lm	79 lm/W	•			7240-1-3-929-XX		
78 W		Asymmetric	4000 K	7310 lm	93 lm/W	•			7240-1-3-860-XX		
80 W		Asymmetric	3000 K	6870 lm	85 lm/W	•			7240-K-3-671-XX		
			3000 K	8120 lm	101 lm/W	•			7240-1-3-859-XX		
84 W		Asymmetric	4000 K	8110 lm	96 lm/W	•			7240-K-3-672-XX		
	4000 K		8110 lm	96 lm/W			•	7240-K-5-672-XX			
OD-7241		60 W	Bi-Symmetric	4000 K	5580 lm	93 lm/W	•			7241-7-3-907-XX	
78 W		Bi-Symmetric	4000 K	8020 lm	102 lm/W	•			7241-7-3-860-XX		
OD-7242		120 W	Asymmetric	4000 K	10160 lm	84 lm/W	•			7242-1-3-907-XX	
3000 K				9480 lm	79 lm/W	•			7242-1-3-929-XX		
160 W		Asymmetric	3000 K	16240 lm	101 lm/W	•			7242-1-3-859-XX		

*Please contact sales team for special request.

KRONOS

- PROJECTOR
- WALL SURFACE MOUNT
- POLE MOUNTED

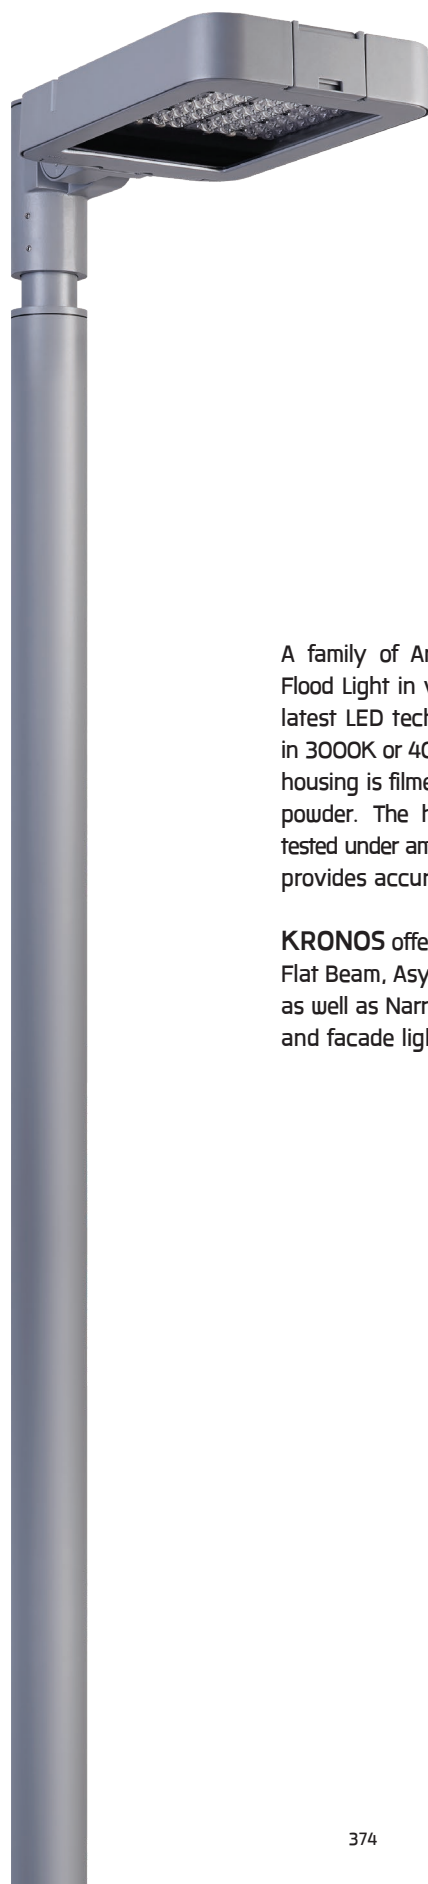

A family of Area Light, Surface Washer and Architectural-Grade Flood Light in various mounting application **KRONOS** utilizes the latest LED technology from renowned manufacturers with high CRI in 3000K or 4000K. The high quality corrosion resistance aluminum housing is filmed with Nano Ceramic and coated with super durable powder. The heat management has been delicately designed and tested under ambient thermal condition Ta 50°C. A graduated scale provides accurate aiming of the luminaire.

KRONOS offers various light distribution patterns e.g. Asymmetric Flat Beam, Asymmetric Forward Throw for squares and open spaces, as well as Narrow, Medium, Wide and Elliptical beams for floodlight and facade light applications.



www.unilamp.co.th/en/p/kronos

Specification

- Designed, manufactured and tested according to IEC 60598.
- High-pressure die cast aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.

Available Color




***Custom colors are available on request.*



Living Complex, Bangkok – THAILAND

• MODULAR SOLUTIONS

KRONOS + Mounting Base

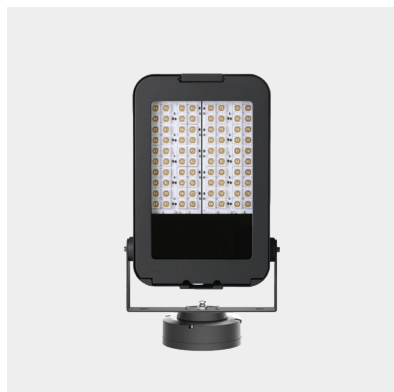

2270
KRONOS -
Flood Light

OR





2271
KRONOS -
Flood Light

+




AUN-MOT-0003-XX
Mounting Base for
dimming interface
[1-10V or Dali]

KRONOS + Pole Top Mount + Pole

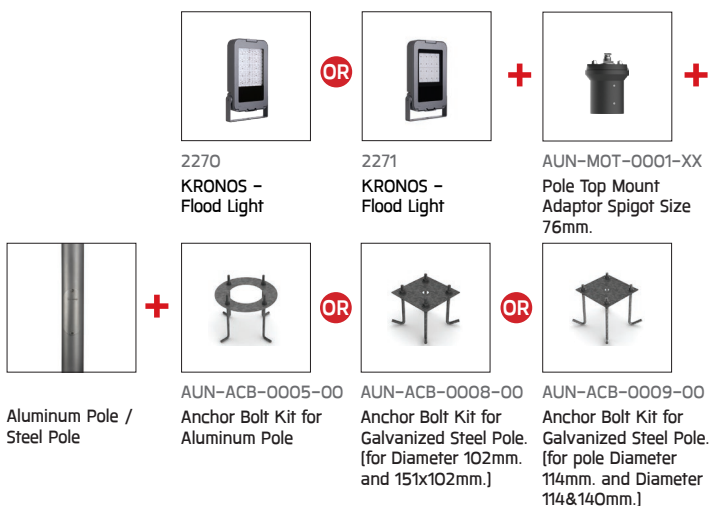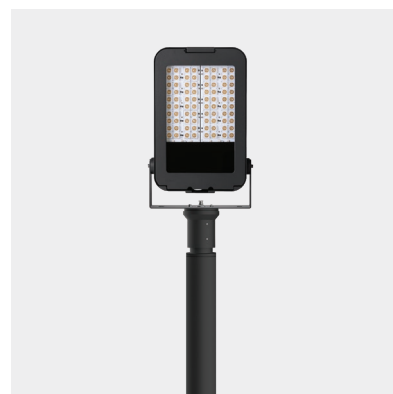

KRONOS + Pole Clamp + Pole

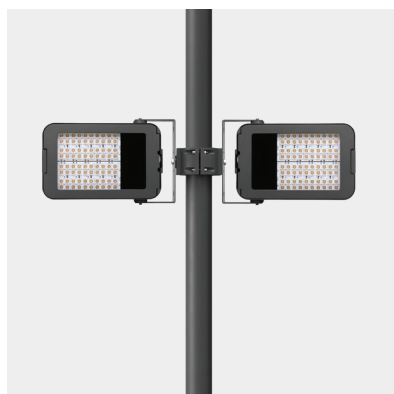


2270
KRONOS -
Flood Light

OR



2271
KRONOS -
Flood Light

+



AUN-CLP-0002-XX
Pole Clamp
Diameter
102-105mm.

OR



AUN-CLP-0003-XX
Pole Clamp
Diameter 114mm.

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit for
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor Bolt Kit for
Galvanized Steel Pole.
[for Diameter 102mm.
and 151x102mm.]


OR



AUN-ACB-0009-00
Anchor Bolt Kit for
Galvanized Steel Pole.
[for pole Diameter
114mm. and Diameter
114&140mm.]

• MODULAR SOLUTIONS

KRONOS + Mounting Arm + Pole

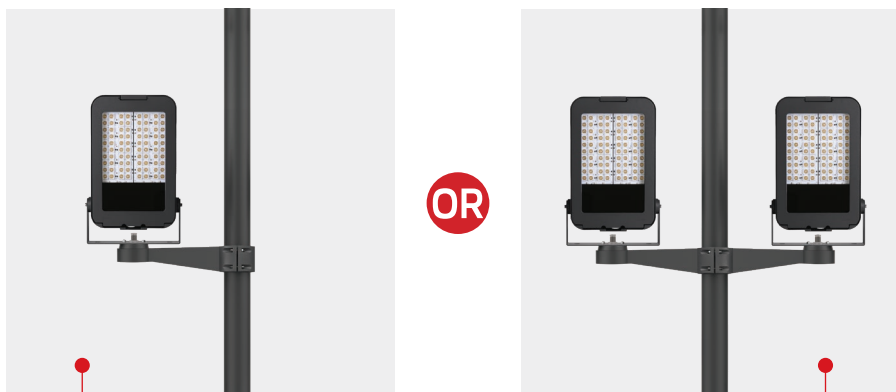

OR



2270
KRONOS -
Flood Light

OR



2271
KRONOS -
Flood Light

+



AUN-MOT-0002-XX
Wall or Pole
Mounting Arm
Diameter 114mm.

OR



AUN-MOT-0004-XX
Wall or Pole
Mounting Double Arm
Diameter 114mm.

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit for
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor Bolt Kit for
Galvanized Steel Pole.
(for Diameter 102mm.
and 151x102mm.)

OR




AUN-ACB-0009-00
Anchor Bolt Kit for
Galvanized Steel Pole.
(for pole Diameter
114mm. and Diameter
114&140mm.)

KRONOS



KRONOS



KRONOS


Application Type : Projector
Subgroup : Rectangular

KRONOS / 2270	
KRONOS / 2271	
Luminaire Performance	
11900 – 18200 lm	
119 – 167 W	
93 – 128 lm/W	
Beam Options	
Narrow	Medium
Wide	Asymmetric
Color Temperature	
3000K/ 4000K	
Controller	
On-Off	
Input Voltage	
220-240VAC 50/60HZ	

Accessories	
	Mounting base
	Pole top mount Adaptor
	Steel pole
	Aluminum pole
	Pole Clamp
	IP68 Connector
	Wall/ Pole mounting arm



KRONOS



KRONOS



Application Type : Wall surface mount
Subgroup : Area wall light/ Directed wall light

KRONOS / 2370	
KRONOS / 2371	
KRONO / 2372	
Luminaire Performance	
11100 – 18200 lm	
119 – 167 W	
93 – 116 lm/W	
Beam Options	
Narrow	Wide
Asymmetric	Road Optic
Color Temperature	
3000K/ 4000K	
Controller	
On-off	
Input Voltage	
220–240Vac 50/60Hz	


KRONOS



KRONOS

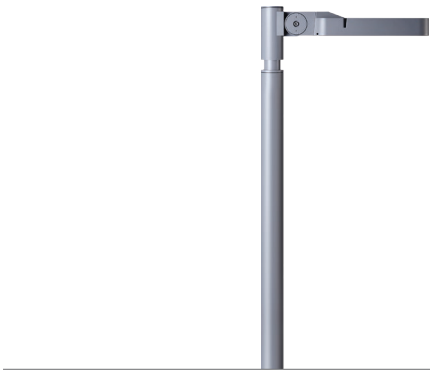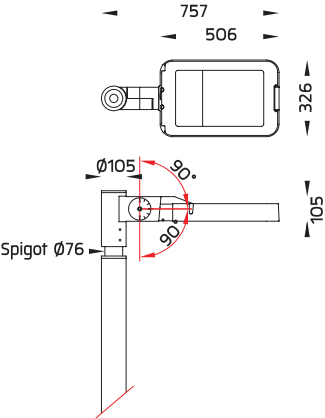

KRONOS – DS

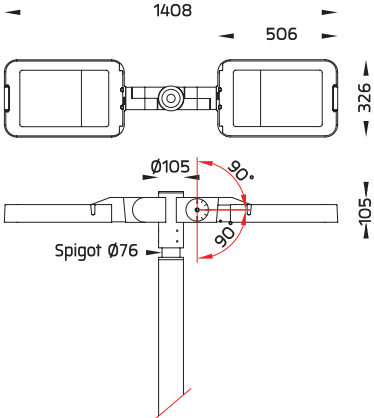

KRONOS


Application Type : Pole mounted
Subgroup : Urban area/ Urban ambient

KRONOS / 7770
KRONOS / 7771
KRONOS / 7772
KRONOS – DS / 7773

Luminaire Performance

11100 – 36400 lm
119 – 334 W
86 – 116 lm/W

Beam Options



Color Temperature

3000K/ 4000K

Controller

On-off/ DALI

Input Voltage

220–240VAC 50/60HZ

Accessories



Steel pole



Anchor bolt

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller		Ordering Code
									
KRONOS	OD-2270 	119 W	Asymmetric	3000 K 4000 K	11900 lm 13820 lm	100 lm/W 116 lm/W	• •		2270-1-3-863-XX 2270-1-3-864-XX
		167 W	Asymmetric	3000 K 4000 K	15680 lm 18200 lm	93 lm/W 108 lm/W	• •		2270-1-3-861-XX 2270-1-3-862-XX
	OD-2271 	119 W	15° 30°	4000 K 4000 K	15240 lm 14820 lm	128 lm/W 124 lm/W	• •		2271-5-3-864-XX 2271-6-3-864-XX
			67°	3000 K	16600 lm	99 lm/W	•		2271-7-3-861-XX
		167 W	95°	3000 K 4000 K	15690 lm 18200 lm	93 lm/W 108 lm/W	• •		2271-2-3-861-XX 2271-2-3-862-XX
	OD-2370 	119 W	Asymmetric	3000 K 4000 K	11900 lm 13820 lm	100 lm/W 116 lm/W	• •		2370-1-3-863-XX 2370-1-3-864-XX
		167 W	Asymmetric	4000 K	18200 lm	108 lm/W	•		2370-1-3-862-XX
	OD-2371 	119 W	15° 95°	3000 K 3000 K	13120 lm 11920 lm	110 lm/W 100 lm/W	• •		2371-5-3-863-XX 2371-2-3-863-XX
	OD-2372 	119 W	Road Optic	3000 K	11100 lm	93 lm/W	•		2372-9-3-863-XX
	OD-7770 	119 W	Asymmetric	3000 K 4000 K	11900 lm 13820 lm	100 lm/W 116 lm/W	• •		7770-1-3-863-XX 7770-1-3-864-XX
		167 W	Asymmetric	3000 K 4000 K	15680 lm 18200 lm	93 lm/W 108 lm/W	• •		7770-1-3-861-XX 7770-1-3-862-XX
	OD-7771 	119 W	95°	4000 K	13840 lm	116 lm/W	•		7771-2-3-864-XX
	OD-7772 	119 W	Road Optic	3000 K	11100 lm	93 lm/W	•		7772-9-3-863-XX
		167 W	Road Optic	3000 K 4000 K	14450 lm 16760 lm	86 lm/W 100 lm/W	• •	•	7772-9-3-861-XX 7772-9-5-862-XX
	OD-7773 	238 W	Asymmetric	3000 K	23800 lm	100 lm/W	•		7773-1-3-863-XX
		334 W	Asymmetric	3000 K 4000 K	31360 lm 36400 lm	93 lm/W 108 lm/W	• •		7773-1-3-861-XX 7773-1-3-862-XX

*Please contact sales team for special request.

ANDROMEDA

■ POLE MOUNTED



Content
by Application



Content
by Family



ANDROMEDA is a round-shaped robust outdoor luminaire for public space illumination. The housing is made of corrosion resistant LM6 die-cast aluminum and is passivated with Nano Ceramic layer then coated with primer and super durable Polyester powder paint. Mini **ANDROMEDA** is equipped with high power LEDs with high CRI in 3000K or 4000K color temperature with 3 SDCM. It offers perfectly engineered light distributions for various lighting applications such as area lighting, car parks, open spaces and facade lighting. **ANDROMEDA** fulfills the dark sky requirement and is free from light pollution. The heat management has been delicately designed and tested under high ambient thermal condition. An integrated scale allows precise aiming of the luminaire to achieve the desired illumination level. The recommended mounting height is between 4 – 6 meters depending on the application. Available as an option are Aluminum Poles, Galvanized steel poles and anchorage unit for concrete foundations.



www.unilamp.co.th/en/p/andromeda


Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die cast aluminum body.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module and driver.
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.

Available Color



****Custom colors are available on request.**

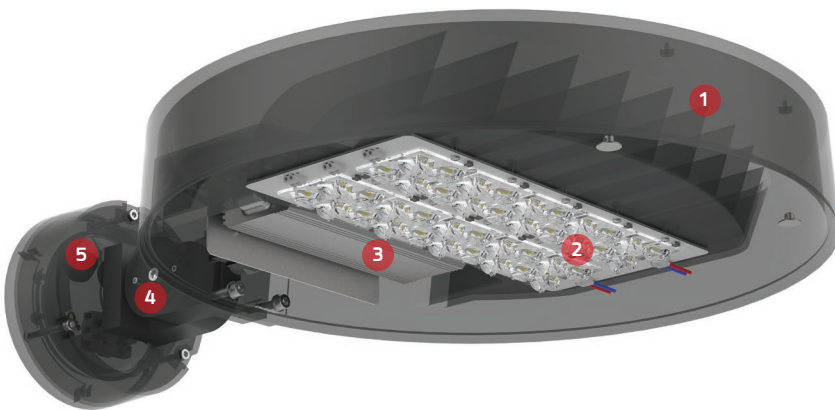

Mini ANDROMEDA

1. Heat Sink Body

Computer-aided design heat sink with flow simulation analysis. Suitable for any area even without wind blow. Tested under ambient thermal condition T_a 50°C.

2. Lens + LED

LED and optical lens from world renowned manufacturer. Available in narrow, medium, wide, elliptical, asymmetric forward throw and road optics - 3000K and 4000K CRI>80 3-Step SDCM.

3. Driver

High quality IP67 LED constant current driver. Complied with Safety and EMC regulations.

4. Aiming

Graduated scale with locking mechanism. Adjustable with Hexagon tool.

5. Quick Connector

Supplied with detachable connector for easy installation.


Noble Curate, Noble Curve Ekamai-Ramintra,
Bangkok - THAILAND




ANDROMEDA



Mini ANDROMEDA



Mini ANDROMEDA – DS



Mini ANDROMEDA

Application Type : Pole mounted
Subgroup : Urban area

Mini ANDROMEDA / 7297	
Mini ANDROMEDA – DS / 7298	
Luminaire Performance	
5830 – 18080 lm	
62 – 174 W	
94 – 109 lm/W	
Beam Options	
Wide	Asymmetric
Road Optic	
Color Temperature	
3000K/ 4000K	
Controller	
On-Off/ DALI	
Input Options	
220-240Vac 50/60Hz	

Accessories	
	Aluminum pole
	Steel pole
	Anchor bolt

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller		Ordering Code		
											
Mini ANDROMEDA	OD-7297		95° Asymmetric	3000 K	6170 lm	99 lm/W			7297-2-3-863-XX		
	3000 K			6120 lm	98 lm/W	7297-1-3-863-XX					
	3000 K			5830 lm	94 lm/W	7297-9-3-863-XX					
	4000 K		6780 lm	109 lm/W	7297-9-3-864-XX						
	87 W		Asymmetric	3000 K	8190 lm	94 lm/W					7297-1-3-861-XX
				4000 K	9500 lm	109 lm/W					7297-1-5-862-XX
		4000 K		9040 lm	103 lm/W	7297-9-5-862-XX					
	OD-7298		Road Optic	3000 K	11660 lm	94 lm/W			7298-9-3-863-XX		
	4000 K			18080 lm	103 lm/W	7298-9-5-862-XX					

*Please contact sales team for special request.

Top Golf, Bangkok – THAILAND



ZET

INGROUND



ZET a walk-over in ground uplighter is fitted with high power LED or AC COB for cost effective installation. It is supplied with a post-cured silicone gasket and pre-wired IP67 anti-condensation kit.


ZET is commonly used to highlight architectural tasks, wall structures, low ceilings, and columns. The glare-shield honey comb and softening lens are available as accessories. To avoid installation issues and add another level of safety, it is pre-wired and is fitted with an anti-condensation device.



www.unilamp.co.th/en/p/zet

Specification

- Designed, manufactured and tested according to IEC 60598.
- Stainless steel, LM6 die-cast aluminum housing.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- High performance lenses/ reflector.
- Post-cured silicone gasket.
- High quality LED module.
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.





ZET Round / CVDA



NEW!

COB



Asymmetric



Sharp Elliptical V

ZET Round / CVDA




AC COB


ZET Round Opal / CVDA



*Integrated driver



ZET Round Adjustable/ CVDA



ZET

Application Type : Inground
Subgroup : Up light

ZET Round/ CVDA / 9011

ZET Round Opal/ CVDA / 9002

ZET Round Opal / 9012

ZET Round Adjustable CVDA / 9013

Luminaire Performance


18 – 1540 lm

2.4 – 14 W

7 – 124 lm/W

High power LED/ COB LED/ AC COB

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

On-Off / On-Off [AC LED] / On-Off / DALI / Remote

Input Options

24Vdc

220-240Vac 50/60Hz

1050mA, 11.9Vdc, Uin max 150Vdc

1050mA, 12.5Vdc, Uin max 150Vdc

250mA, 32.8Vdc, Uin max 500Vdc

350mA, 24.5Vdc, Uin max 150Vdc

350mA, 31.5Vdc, Uin max 500Vdc

700mA, 11.6Vdc, Uin max 150Vdc

Accessories

	Honey comb louver		Softening filter
	CC Driver		CV Driver
	IP68 Connector		Deep ground recess housing



ZET Square / CVDA




NEW!


COB



AC COB



ZET Square Adjustable / CVDA

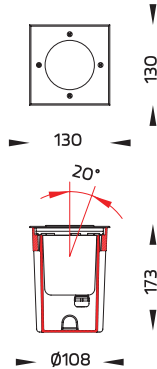

ZET

Application Type : Inground
Subgroup : Up light

ZET Square/ CVDA / 9021

ZET Square Adjustable/ CVDA / 9023

Luminaire Performance


600 – 1540 lm

8.1 – 14 W

56 – 117 lm/W

High power LED/ COB LED/ AC COB

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

On-Off [AC LED] / On-Off / DALI / Remote

Input Options

24Vdc

220-240Vac 50/60Hz

350mA, 31.5Vdc, Uin max 500Vdc

700mA, 11.6Vdc, Uin max 150Vdc

Accessories

	Honey comb louver		Softening filter
	CC Driver		CV Driver
	IP68 Connector		Deep ground recess housing

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code
										REMOTE	
ZET Round / CVDA	OD-9002		N/A	4000 K	540 lm	62 lm/W				•	9002-0-2-920-91
				4000 K	150 lm	15 lm/W		•			9002-0-3-870-91
				3000 K	150 lm	13 lm/W		•			9002-0-3-869-91
			N/A	2700 K	300 lm	23 lm/W				•	9002-0-2-528-91
				3000 K	300 lm	23 lm/W				•	9002-0-2-529-91
				2700 K	300 lm	23 lm/W			•		9002-0-7-583-91
				3000 K	300 lm	23 lm/W			•		9002-0-7-584-91
	OD-9011		19°	3000 K	450 lm	56 lm/W		•			9011-B-3-869-91
			12°	3000 K	870 lm	107 lm/W			•		9011-A-7-587-91
			30°	3000 K	670 lm	82 lm/W			•		9011-C-7-587-91
			Asymmetric	2700 K	730 lm	90 lm/W			•		9011-K-7-586-91
				3000 K	730 lm	90 lm/W			•		9011-K-7-587-91
				4000 K	780 lm	96 lm/W			•		9011-K-7-588-91
			13°	4000 K	630 lm	63 lm/W		•			9011-5-3-870-91
			40°	4000 K	630 lm	63 lm/W		•			9011-7-3-870-91
			13°	3000 K	620 lm	56 lm/W		•			9011-5-3-869-91
			40°	3000 K	620 lm	56 lm/W		•			9011-7-3-869-91
			12°	2700 K	1220 lm	93 lm/W				•	9011-A-2-528-91
				3000 K	1220 lm	93 lm/W				•	9011-A-2-529-91
				3000 K	1220 lm	93 lm/W			•		9011-A-7-584-91
				4000 K	1320 lm	101 lm/W			•		9011-A-7-585-91
			30°	2700 K	940 lm	72 lm/W				•	9011-C-2-528-91
				3000 K	940 lm	72 lm/W				•	9011-C-2-529-91
				4000 K	1020 lm	78 lm/W				•	9011-C-2-530-91
				3000 K	940 lm	72 lm/W			•		9011-C-7-584-91
			52°	3000 K	850 lm	65 lm/W				•	9011-D-2-529-91
				4000 K	910 lm	70 lm/W				•	9011-D-2-530-91
				3000 K	850 lm	65 lm/W			•		9011-D-7-584-91
			Asymmetric	3000 K	1020 lm	78 lm/W				•	9011-K-2-529-91
				3000 K	1020 lm	78 lm/W			•		9011-K-7-584-91
			Sharp Elliptical V	3000 K	240 lm	18 lm/W				•	9011-Q-2-644-91
			14°	2700 K	1250 lm	89 lm/W					9011-A-2-710-91
				3000 K	1250 lm	89 lm/W					9011-A-2-719-91
				4000 K	1340 lm	96 lm/W					9011-A-2-720-91
			31°	2700 K	1440 lm	103 lm/W					9011-C-2-505-91
				3000 K	1510 lm	108 lm/W					9011-C-2-902-91
				4000 K	1540 lm	110 lm/W					9011-C-2-905-91
			51°	2700 K	1230 lm	88 lm/W					9011-D-2-505-91
				3000 K	1290 lm	92 lm/W					9011-D-2-902-91
				4000 K	1320 lm	94 lm/W					9011-D-2-905-91
ZET Round Adjustable / CVDA	OD-9012		N/A	3000 K	18 lm	7 lm/W	•				9012-0-3-989-91
	OD-9013		12°	2700 K	950 lm	117 lm/W				•	9013-A-2-528-91
				3000 K	950 lm	117 lm/W				•	9013-A-2-529-91
				4000 K	1010 lm	124 lm/W				•	9013-A-2-530-91
				3000 K	950 lm	117 lm/W			•		9013-A-7-584-91
			25°	4000 K	1010 lm	124 lm/W			•		9013-A-7-585-91
				2700 K	720 lm	88 lm/W				•	9013-B-2-528-91
				3000 K	720 lm	88 lm/W				•	9013-B-2-529-91
				4000 K	770 lm	95 lm/W				•	9013-B-2-530-91
			46°	3000 K	720 lm	88 lm/W			•		9013-B-7-584-91
				3000 K	740 lm	91 lm/W				•	9013-C-2-529-91
				4000 K	790 lm	97 lm/W				•	9013-C-2-530-91
				2700 K	740 lm	91 lm/W			•		9013-C-7-583-91
			17°	3000 K	740 lm	91 lm/W			•		9013-C-7-584-91
				2700 K	630 lm	76 lm/W				•	9013-A-2-503-91
				3000 K	660 lm	80 lm/W				•	9013-A-2-901-91

*Please contact sales team for special request.

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code
									REMOTE	
OD-9021 	8.1 W	30°	3000 K	670 lm	82 lm/W			•		9021-C-7-587-91
		52°	3000 K	600 lm	74 lm/W			•		9021-D-7-587-91
	10 W	13°	4000 K	630 lm	63 lm/W		•			9021-5-3-870-91
	11 W	13°	3000 K	620 lm	56 lm/W		•			9021-5-3-869-91
	14 W	14°	2700 K	1250 lm	89 lm/W				•	9021-A-2-710-91
			3000 K	1250 lm	89 lm/W				•	9021-A-2-719-91
			4000 K	1340 lm	96 lm/W				•	9021-A-2-720-91
	14 W	31°	2700 K	1440 lm	103 lm/W				•	9021-C-2-505-91
			3000 K	1510 lm	108 lm/W				•	9021-C-2-902-91
			4000 K	1540 lm	110 lm/W				•	9021-C-2-905-91
	14 W	51°	2700 K	1230 lm	88 lm/W				•	9021-D-2-505-91
			3000 K	1290 lm	92 lm/W				•	9021-D-2-902-91
			4000 K	1320 lm	94 lm/W				•	9021-D-2-905-91
OD-9023 	8.1 W	12°	3000 K	950 lm	117 lm/W				•	9023-A-2-529-91
		46°	4000 K	790 lm	97 lm/W			•		9023-C-7-585-91



Elio Del Nest Condominium, Bangkok - Thailand

ARC

INGROUND



NEW!

ARC – CC/ CC [DMX]

RGBW



ARC – the adjustable walkover inground-uplighter. **ARC** incorporates a unique aiming mechanism that is adjustable from the outside of the fixture using a standard screwdriver or hexagon key. This key benefit means the installer doesn't need to open the luminaire or remove it from the ground for adjustment. Final commissioning and aiming are carried out while the product is still sitting in the ground block-out. The housing is enhanced LM6 aluminum, and the front cover plate comes in stainless steel.

ARC offers outstanding beam quality with high contrast and precise control. The luminaire is fitted with a pre-wired supply cable for inground application and internally potted to prevent humidity and condensation.



www.unilamp.co.th/en/p/arc

Specification

- Designed, manufactured and tested according to IEC 60598.
- Stainless steel, LM6 die-cast aluminum housing.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- High performance PC lens.
- Adjustable optical unit.
- Post-cured silicone gasket.
- High quality LED module.
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.




Typical Application



ARC



ARC ARC – CC **NEW!** ARC – CC (DMX) **NEW!**



ARC

Application Type : Inground
Subgroup : Up light

ARC / 9060	
ARC – CC / 9060	
ARC – CC (DMX) / 9060	
Luminaire Performance	
610 – 2700 lm	
19 – 27 W	
27 – 103 lm/W	
Beam Options	
<div><div>Narrow</div><div>Medium</div><div>Wide</div></div>	
Color Temperature	
2700K/ 3000K/ 4000K/ RGBW	
Controller	
On–Off/ 1–10V/ DALI/ Remote	
Input Options	
220–240Vac 50/60Hz	
500mA, 4CHx8.9Vdc–11.4Vdc, Uin max 150Vdc	

Accessories		
	Honey Comb Louver	IP68 Connector
	CV Driver	DMX Decoder
	Splitter DMX	Cable
	XLR 3 pin	IP67 Water Tight
	IP68 Water Tight	DMX Controller

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code
										REMOTE	
ARC	OD-9060 	19 W	33°	2700 K	1830	96 lm/W	•				9060-C-3-506-91
				3000 K	1920	101 lm/W	•				9060-C-3-887-91
				4000 K	1960	103 lm/W	•				9060-C-3-891-91
				2700 K	1830	96 lm/W		•			9060-C-4-506-91
				3000 K	1920	101 lm/W		•			9060-C-4-887-91
				4000 K	1960	103 lm/W		•			9060-C-4-891-91
				2700 K	1830	96 lm/W			•		9060-C-5-506-91
				3000 K	1920	101 lm/W			•		9060-C-5-887-91
				4000 K	1960	103 lm/W			•		9060-C-5-891-91
				2700 K	1710	90 lm/W	•				9060-D-3-506-91
				3000 K	1790	94 lm/W	•				9060-D-3-887-91
				4000 K	1840	96 lm/W	•				9060-D-3-891-91
		19 W	53°	2700 K	1710	90 lm/W		•			9060-D-4-506-91
				3000 K	1790	94 lm/W		•			9060-D-4-887-91
				4000 K	1840	96 lm/W		•			9060-D-4-891-91
				2700 K	1710	90 lm/W			•		9060-D-5-506-91
				3000 K	1790	94 lm/W			•		9060-D-5-887-91
				4000 K	1840	96 lm/W			•		9060-D-5-891-91
		20 W	15°	2700 K	1830	91 lm/W	•				9060-A-3-767-91
				3000 K	1890	94 lm/W	•				9060-A-3-768-91
				4000 K	1990	99 lm/W	•				9060-A-3-769-91
				2700 K	1830	91 lm/W		•			9060-A-4-767-91
				3000 K	1890	94 lm/W		•			9060-A-4-768-91
				4000 K	1990	99 lm/W		•			9060-A-4-769-91
				2700 K	1830	91 lm/W			•		9060-A-5-767-91
				3000 K	1890	94 lm/W			•		9060-A-5-768-91
				4000 K	1990	99 lm/W			•		9060-A-5-769-91
		26 W	33°	2700 K	2510	96 lm/W	•				9060-C-3-505-91
				3000 K	2630	101 lm/W	•				9060-C-3-902-91
				4000 K	2700	103 lm/W	•				9060-C-3-905-91
				2700 K	2510	96 lm/W		•			9060-C-4-505-91
				3000 K	2630	101 lm/W		•			9060-C-4-902-91
				4000 K	2700	103 lm/W		•			9060-C-4-905-91
				2700 K	2510	96 lm/W			•		9060-C-5-505-91
				3000 K	2630	101 lm/W			•		9060-C-5-902-91
				4000 K	2700	103 lm/W			•		9060-C-5-905-91
		26 W	53°	2700 K	2350	90 lm/W	•				9060-D-3-505-91
				3000 K	2460	94 lm/W	•				9060-D-3-902-91
				4000 K	2520	96 lm/W	•				9060-D-3-905-91
				2700 K	2350	90 lm/W		•			9060-D-4-505-91
				3000 K	2460	94 lm/W		•			9060-D-4-902-91
				4000 K	2520	96 lm/W		•			9060-D-4-905-91
				2700 K	2350	90 lm/W			•		9060-D-5-505-91
				3000 K	2460	94 lm/W			•		9060-D-5-902-91
				4000 K	2520	96 lm/W			•		9060-D-5-905-91
		27 W	15°	2700 K	2460	91 lm/W	•				9060-A-3-710-91
				3000 K	2540	94 lm/W	•				9060-A-3-719-91
				4000 K	2680	99 lm/W	•				9060-A-3-720-91
				2700 K	2460	91 lm/W		•			9060-A-4-710-91
				3000 K	2540	94 lm/W		•			9060-A-4-719-91
				4000 K	2680	99 lm/W		•			9060-A-4-720-91
				2700 K	2460	91 lm/W			•		9060-A-5-710-91
				3000 K	2540	94 lm/W			•		9060-A-5-719-91
				4000 K	2680	99 lm/W			•		9060-A-5-720-91
ARC - CC	OD-9060 	22 W	15°	RGBW	680 lm	30 lm/W				•	9060-A-2-440-91
			26°	RGBW	610 lm	27 lm/W				•	9060-B-2-440-91
			35°	RGBW	610 lm	27 lm/W				•	9060-C-2-440-91
ARC - CC [DMX]	OD-9060 	22 W	15°	RGBW	680 lm	30 lm/W				•	9060-A-D-440-91
			26°	RGBW	610 lm	27 lm/W				•	9060-B-D-440-91
			35°	RGBW	610 lm	27 lm/W				•	9060-C-D-440-91

*Please contact sales team for special request.

QUARK

INGROUND

QUARK a family of walkover and drive over in-ground uplighter with shallow housing for minimum recess depth. Designed for high power LED with the choices of three different color temperatures from 2700K, 3000K or 4000K in high color consistency and remarkable color rendering index. The light distribution is available in various pattern e.g. wall wash, bi-symmetric, narrow, medium, wide and elliptical beam.

QUARK is ideal for the illumination of plants, flagpoles, columns, walls, building facades and also architectural works and landmarks. To avoid installation issues and add another level of safety, it is pre-wired and is fitted with an anti condensation device. It is available in round and square with fixed or dimmable light output. Gel-filled water tight connecting devices are available as an accessory.



NEW! Mini QUARK Square – CC [DMX]

NEW! Mini QUARK Round – CC [DMX]



www.unilamp.co.th/en/p/quark


Specification

- Designed, manufactured and tested according to IEC 60598.
- Stainless steel, LM6 die-cast aluminum housing.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- High performance PC lens/ aluminum reflector.
- Post-cured silicone gasket.
- High quality LED module.
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.

Available Color




****Custom colors are available on request.**

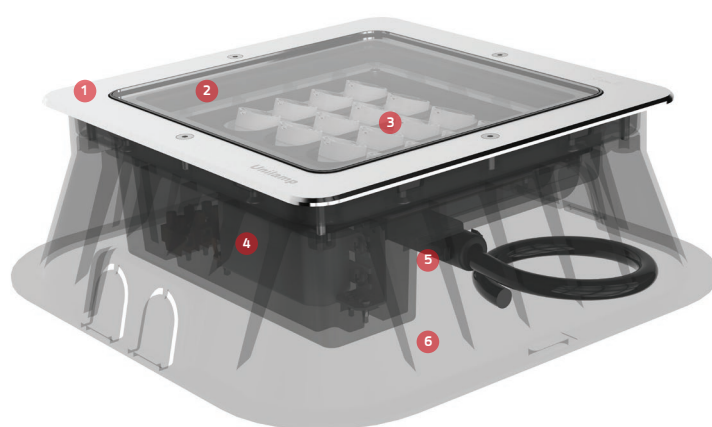

Mini QUARK

- 1. Front Frame**
Corrosion resistant marine grade 316 stainless steel frame.
- 2. Cover**
Impact resistant tempered safety glass cover. Glass flushes to the front frame, no accumulation of dust and water.
- 3. Lens + LED**
LED and optical lens from world renowned manufacturer. Available in narrow, medium, wide, elliptical, asymmetric forward forward – 2700K, 3000K and 4000K CRI>80 3-Step SDCM.
- 4. Driver**
High quality LED constant current driver. Conform to applicable safety standards and electromagnetic compatibility.
- 5. Protect against water**
Factory sealed with cable gland and Neoprene cable with Anti-Humidity kit.
- 6. Recess Housing**
Ground recess housing made from engineering polymer with glass-fiber reinforced. The luminaires can be driven over by small vehicles at low speed.


R-Evolve, South Perth – AUSTRALIA

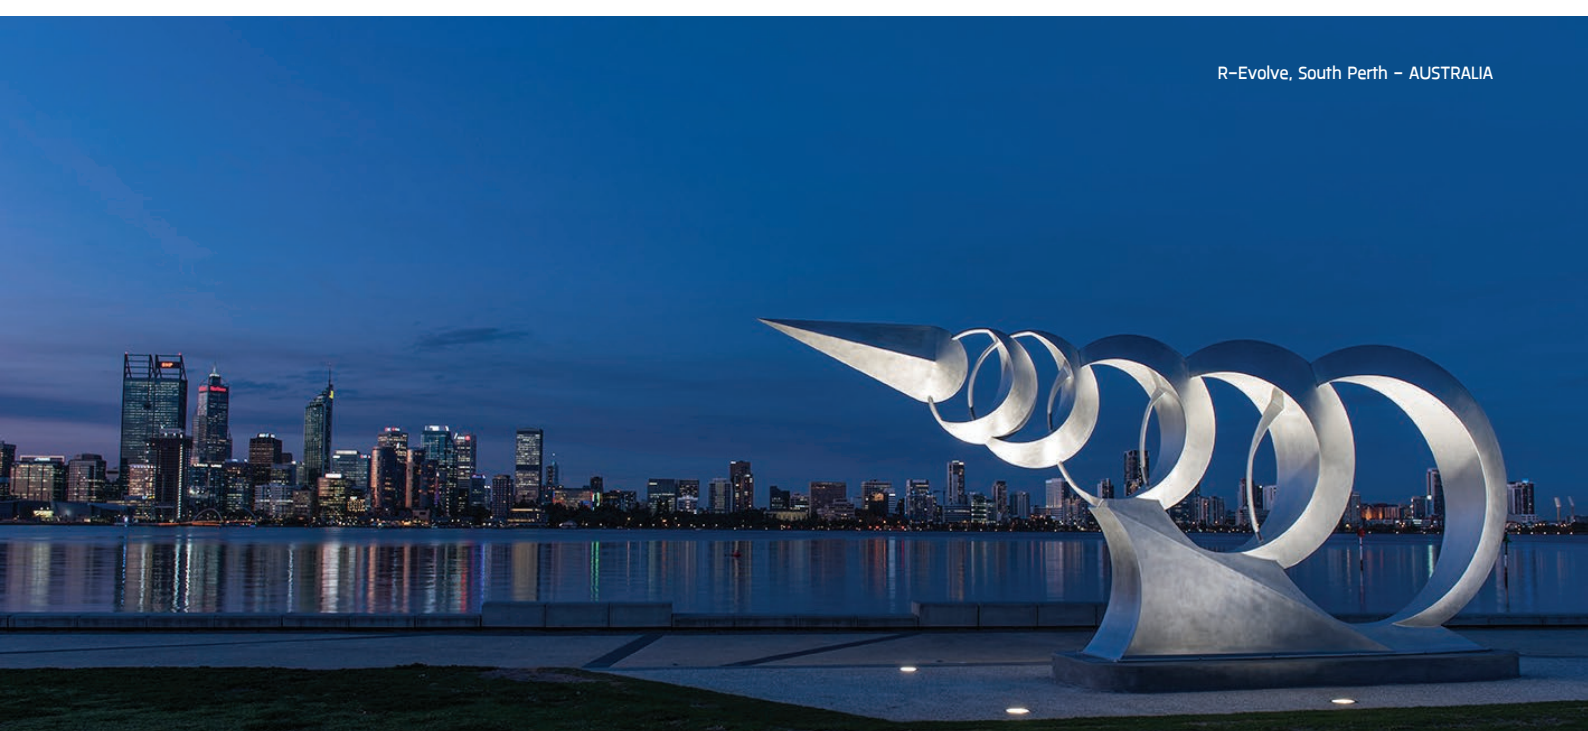


QUARK



Mini QUARK Round



Mini QUARK Square



QUARK

Application Type : Inground
Subgroup : Up light


Mini QUARK Round/ 9035
Mini QUARK Round – CC/ 9035
Mini QUARK Round – CC (DMX)/ 9035

NEW!

Luminaire Performance

1470 – 3010 lm
19 – 32 W
58 – 108 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K/ RGBW

Controller

On-off/ DALI/ Remote

Input Voltage

220–240Vac 50/60Hz
500mA, 45.6VDC, Uin MAX 150VDC
500mA, 4CHx9Vdc–12Vdc, Uin max 150Vdc
700mA, 4CHx9.5Vdc–12.5Vdc, Uin max 150Vdc

QUARK

Application Type : Inground
Subgroup : Up light


Mini QUARK Square/ 9045
Mini QUARK Square – CC/ 9045
Mini QUARK Square – CC (DMX)/ 9045

NEW!

Luminaire Performance

1440 – 2670 lm
19 – 32 W
57 – 115 lm/W

Beam Options



Color Temperature

3000K/ 4000K/ RGBW


Controller

On-off/ Remote

Input Voltage

220–240Vac 50/60Hz
500mA, 4CHx9Vdc–12Vdc, Uin max 150Vdc
700mA, 4CHx9.5Vdc–12.5Vdc, Uin max 150Vdc

Accessories

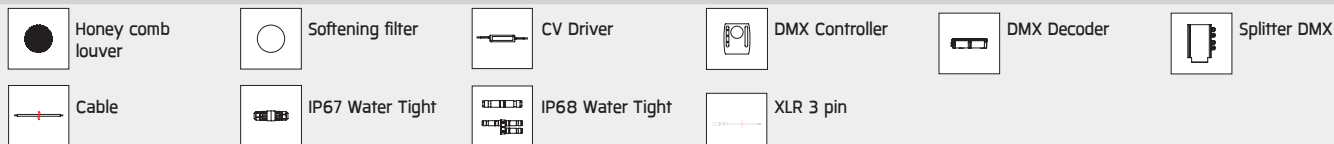

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code
										REMOTE	
Mini Quark Round	OD-9035		12°	3000 K	2070 lm	108 lm/W	•				9035-5-3-897-91
				2700 K	2070 lm	108 lm/W	•				9035-5-3-523-91
	 RGBW	19 W	25°	3000 K	1860 lm	97 lm/W	•				9035-6-3-897-91
				4000 K	2010 lm	105 lm/W	•				9035-6-3-898-91
				2700 K	1860 lm	97 lm/W	•				9035-6-3-523-91
				2700 K	1780 lm	93 lm/W	•				9035-7-3-897-91
			46°	2700 K	1780 lm	93 lm/W	•				9035-7-3-523-91
				3000 K	1770 lm	93 lm/W	•				9035-9-3-897-91
				4000 K	1910 lm	100 lm/W	•				9035-9-3-898-91
				2700 K	1770 lm	93 lm/W	•				9035-9-3-523-91
		22 W	25°	RGBW	1620 lm	73 lm/W				•	9035-6-D-687-91
			46°	RGBW	1470 lm	66 lm/W				•	9035-7-D-687-91
			Asymmetric	RGBW	1550 lm	70 lm/W				•	9035-9-D-687-91
	23 W	Asymmetric		2700 K	2410 lm	104 lm/W				•	9035-9-2-524-91
				3000 K	2410 lm	104 lm/W				•	9035-9-2-867-91
	28 W	12°		3000 K	2810 lm	100 lm/W	•				9035-5-3-867-91
				4000 K	3010 lm	107 lm/W	•				9035-5-3-868-91
				2700 K	2810 lm	100 lm/W	•				9035-5-3-524-91
				3000 K	2810 lm	100 lm/W			•		9035-5-5-867-91
		25°		3000 K	2530 lm	90 lm/W	•				9035-6-3-867-91
				4000 K	2710 lm	96 lm/W	•				9035-6-3-868-91
				3000 K	2420 lm	86 lm/W	•				9035-7-3-867-91
				3000 K	2420 lm	86 lm/W			•		9035-7-5-867-91
	28 W	Asymmetric		3000 K	2410 lm	86 lm/W	•				9035-9-3-867-91
				4000 K	2580 lm	92 lm/W	•				9035-9-3-868-91
				2700 K	2410 lm	86 lm/W	•				9035-9-3-524-91
				2700 K	2410 lm	86 lm/W			•		9035-9-5-524-91
				3000 K	2410 lm	86 lm/W			•		9035-9-5-867-91
	32 W	Asymmetric		RGBW	2070 lm	64 lm/W				•	9035-6-D-740-91
				RGBW	1860 lm	58 lm/W				•	9035-7-D-740-91
				RGBW	1980 lm	61 lm/W				•	9035-9-D-740-91
Mini Quark Square	OD-9045		12°	3000 K	2090 lm	110 lm/W	•				9045-5-3-897-91
			25°	4000 K	2190 lm	115 lm/W	•				9045-6-3-898-91
	 RGBW	22 W	Asymmetric	3000 K	1870 lm	98 lm/W	•				9045-9-3-897-91
			25°	RGBW	1590 lm	72 lm/W				•	9045-6-D-687-91
			46°	RGBW	1460 lm	66 lm/W				•	9045-7-D-687-91
			Asymmetric	RGBW	1440 lm	65 lm/W				•	9045-9-D-687-91
	28 W	Asymmetric	46°	3000 K	2600 lm	92 lm/W	•				9045-7-3-867-91
				3000 K	2670 lm	95 lm/W	•				9045-9-3-867-91
	32 W	Asymmetric	25°	RGBW	2020 lm	63 lm/W				•	9045-6-D-740-91
			46°	RGBW	1870 lm	58 lm/W				•	9045-7-D-740-91
				RGBW	1850 lm	57 lm/W				•	9045-9-D-740-91

*Please contact sales team for special request.



Courtyard By Marriott, AraVali Resort, Ncr, Delhi – INDIA



AYERS ground washer luminaires provide the users a low glare multi direction light distribution. The luminaire is able to withstand drive over applications at low speeds due to its robust high strength aluminum cover and GFR polymer recessed housing. The high quality optical mirrored reflector produces a high lumen output in a low silhouette fixture.

Reflector designed and optimized by Photopia engineering software plus a COB LED from renowned manufacturers allow **AYERS** a high intensity sharp light output. The family is available in 2 sizes in one-opening, 2-opening and 4-opening. It is a perfect choice to illuminate ground surfaces. **AYERS** is supplied with a post-cured durable silicone gasket and pre-wired cable for outdoor application.



www.unilamp.co.th/en/p/ayers



AYERS

- 1. Top Cover**
High strength cast aluminum top cover. Impact resistant against vandalism.
- 2. Reflector**
High efficiency metalized Computer-aided design reflector.
- 3. Heat Sink**
State of art aluminum heat sink designed by flow simulation analysis software.
- 4. Body Housing**
Corrosion resistant extruded aluminum housing with Nano Ceramic protection film.
- 5. Protect against water**
Factory sealed with cable gland and neoprene cable with Anti-Humidity kit.

Specification

- Designed, manufactured and tested according to IEC 60598.
- High strength cast aluminum and extruded aluminum housing.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Post-cured silicone gasket.
- High quality LED module.
- Available with integrated driver or remote driver.
- GFR PA6.6 terminal block.
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.

Available Color



****Custom colors are available on request.**



AYERS



Mini AYERS 1x90/
Mini AYERS 1x90 – CC







Mini AYERS 2x90/
Mini AYERS 2x90 – CC



Mini AYERS 4x90/
Mini AYERS 4x90 – CC



Mini AYERS 1x180/
Mini AYERS 1x180 – CC



Mini AYERS

Application Type : Inground
Subgroup : Ground washer

Mini AYERS 1x90 / Mini AYERS 1x90 – CC / 9101
Mini AYERS 2x90 / Mini AYERS 2x90 – CC / 9102
Mini AYERS 4x90 / Mini AYERS 4x90 – CC/ 9103
Mini AYERS 1x180 / Mini AYERS 1x180 – CC / 9107

Luminaire Performance

24 – 130 lm
8.2 – 11 W
2 – 15 lm/W
COB LED/ AC COB

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

AC LED with On-Off control
Remote

Input Options

220–240Vac 50/60Hz
250mA, 32.8Vdc, Uin max 500Vdc

Accessories



CC Driver



IP68
Connector



AYERS 1x90







AYERS 2x90



AYERS 4x90



AYERS 1x180

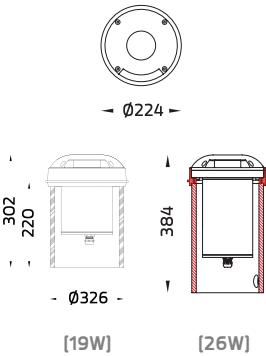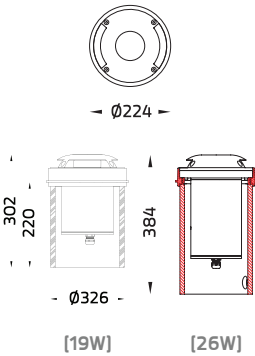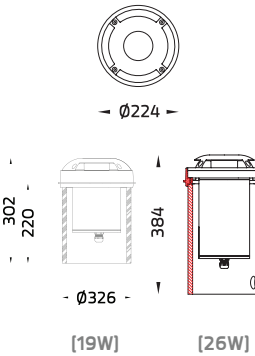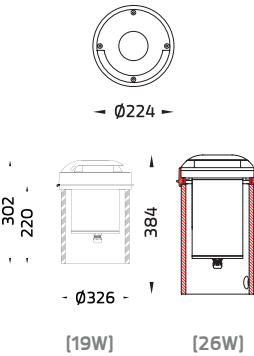

AYERS

Application Type : Inground
Subgroup : Ground washer

AYERS 1x90 / 9104
AYERS 2x90 / 9105
AYERS 4x90/ 9106
AYERS 1x180 / 9108

Luminaire Performance

100 – 550 lm
19 – 26 W
5 – 22 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

On-Off/ 1-10V/ DALI/ CASAMBI

Input Options

220-240Vac 50/60Hz

Accessories




IP68
Connector

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller						Ordering Code
											CASAMBI	REMOTE	
Mini AYERS 1x90 / 1x90 - CC		8.2 W	N/A	2700 K	40 lm	4 lm/W						•	9101-0-2-503-XX
				3000 K	45 lm	5 lm/W						•	9101-0-2-901-XX
				4000 K	45 lm	5 lm/W						•	9101-0-2-904-XX
		11 W	N/A	3000 K	24 lm	2 lm/W		•					9101-0-3-869-XX
				4000 K	24 lm	2 lm/W		•					9101-0-3-870-XX
Mini AYERS 2x90 / 2x90 - CC		8.2 W	N/A	2700 K	65 lm	7 lm/W						•	9102-0-2-503-XX
				3000 K	65 lm	7 lm/W						•	9102-0-2-901-XX
				4000 K	45 lm	4 lm/W		•					9102-0-3-869-XX
		11 W	N/A	3000 K	45 lm	4 lm/W		•					9102-0-3-870-XX
				4000 K	45 lm	4 lm/W		•					
Mini AYERS 4x90 / 4x90 - CC		8.2 W	N/A	3000 K	130 lm	15 lm/W						•	9103-0-2-901-XX
				3000 K	80 lm	7 lm/W		•					9103-0-3-869-XX
				4000 K	80 lm	7 lm/W		•					9103-0-3-870-XX
		11 W	N/A										
Mini AYERS 1x180 / 1x180 - CC		8.2 W	N/A	2700 K	95 lm	11 lm/W						•	9107-0-2-503-XX
				3000 K	100 lm	12 lm/W						•	9107-0-2-901-XX
				4000 K	100 lm	12 lm/W						•	9107-0-2-904-XX
		11 W	N/A	3000 K	50 lm	4 lm/W		•					9107-0-3-869-XX
				4000 K	50 lm	4 lm/W		•					9107-0-3-870-XX
AYERS 1x90		19 W	N/A	2700 K	100 lm	5 lm/W	•						9104-0-3-505-XX
				3000 K	100 lm	5 lm/W	•						9104-0-3-902-XX
				4000 K	140 lm	5 lm/W	•						9104-0-3-887-XX
		26 W	N/A	3000 K	140 lm	5 lm/W	•						9104-0-3-891-XX
				4000 K	140 lm	5 lm/W	•						
AYERS 2x90		19 W	N/A	2700 K	190 lm	10 lm/W	•						9105-0-3-505-XX
				3000 K	200 lm	10 lm/W	•						9105-0-3-902-XX
				4000 K	200 lm	10 lm/W	•						9105-0-3-905-XX
		26 W	N/A	3000 K	270 lm	10 lm/W	•						9105-0-3-887-XX
AYERS 4x90		19 W	N/A	4000 K	420 lm	22 lm/W	•						9106-0-3-905-XX
				3000 K	550 lm	21 lm/W				•			9106-0-5-887-XX
		26 W	N/A										
AYERS 1x180		19 W	N/A	2700 K	210 lm	11 lm/W	•						9108-0-3-505-XX
				3000 K	220 lm	11 lm/W	•						9108-0-3-902-XX
				4000 K	220 lm	11 lm/W	•						9108-0-3-905-XX
				2700 K	210 lm	11 lm/W			•				9108-0-4-505-XX
				3000 K	220 lm	11 lm/W			•				9108-0-4-902-XX
				4000 K	220 lm	11 lm/W			•				9108-0-4-905-XX
				2700 K	210 lm	11 lm/W				•			9108-0-5-505-XX
				3000 K	220 lm	11 lm/W				•			9108-0-5-902-XX
				4000 K	220 lm	11 lm/W				•			9108-0-5-905-XX
				2700 K	210 lm	11 lm/W					•		9108-0-A-505-XX
				3000 K	220 lm	11 lm/W					•		9108-0-A-902-XX
				4000 K	220 lm	11 lm/W					•		9108-0-A-905-XX
		26 W	N/A	2700 K	290 lm	11 lm/W	•						9108-0-3-506-XX
				3000 K	300 lm	11 lm/W	•						9108-0-3-887-XX
				4000 K	310 lm	11 lm/W	•						9108-0-3-891-XX
				2700 K	290 lm	11 lm/W			•				9108-0-4-506-XX
				3000 K	300 lm	11 lm/W			•				9108-0-4-887-XX
				4000 K	310 lm	11 lm/W			•				9108-0-4-891-XX
				2700 K	290 lm	11 lm/W				•			9108-0-5-506-XX
				3000 K	300 lm	11 lm/W				•			9108-0-5-887-XX
				4000 K	310 lm	11 lm/W				•			9108-0-5-891-XX

*Please contact sales team for special request.



Golden City Rayong Hotel, Rayong – THAILAND

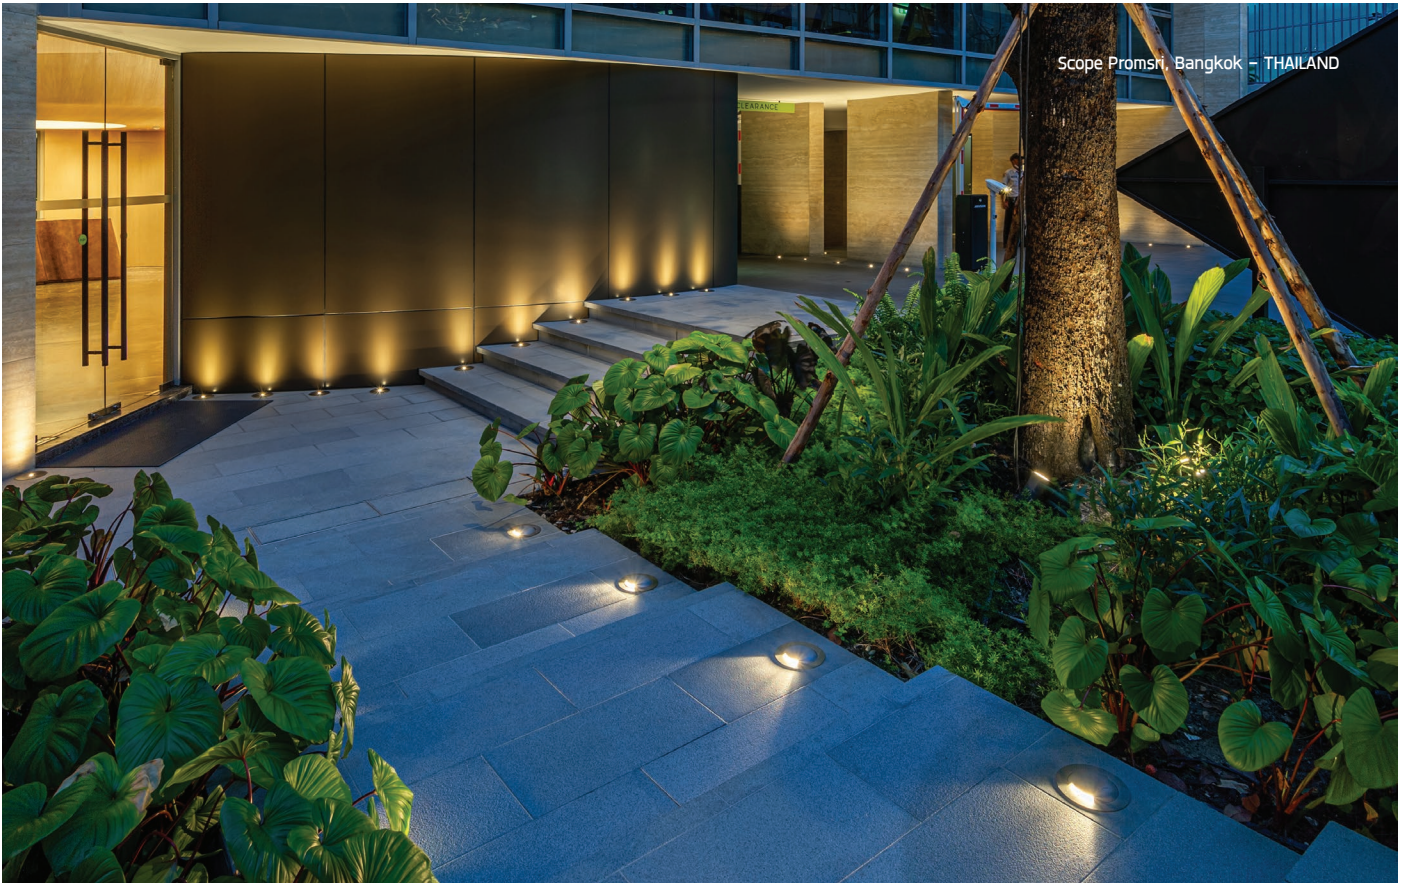

Scope Promsri, Bangkok – THAILAND

SHOOTER


■ ON-GROUND



SHOOTER is a rigid ground-surface uplighter made of a corrosion resistant LM6 aluminum housing passivated with Nano ceramic and double coated with super durable paint. **SHOOTER** is engineered from the beginning to be an ultra reliable IP67 luminaire and be able to withstand harmful impact. The LED used in this luminaire is produced by market leading manufacturer with the choices of three different color temperatures from 2700K, 3000K or 4000K in high color consistency and outstanding CRI. It is suitable for installation where a typical in-ground uplighter cannot be used or a cost effective solution is necessary. This luminaire is ideal for illumination of columns, panels, blocks, and plants.



RGBW



www.unilamp.co.th/en/p/shooter


Specification

- Designed, manufactured and tested according to IEC 60598.
- LM6 die-cast aluminum housing.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- High performance reflector.
- Post-cured silicone gasket.
- High quality LED module.
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.

Available Color



****Custom colors are available on request.**

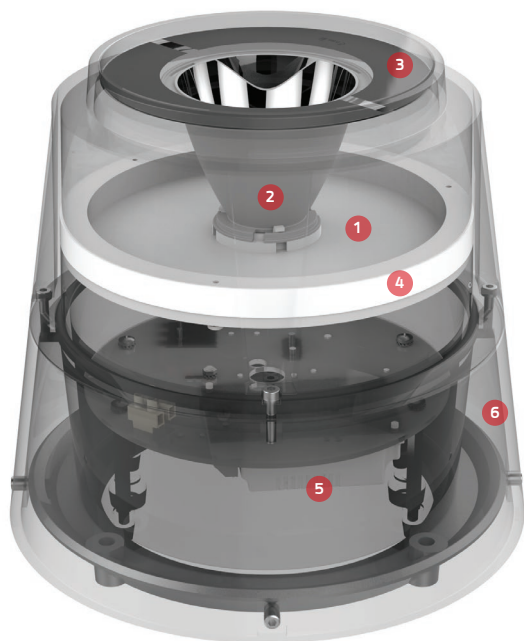

SHOOTER

- 1. LED Module**
High Power LED in COB technology.
2700K, 3000K and 4000K.
CRI >80 / 3-Step MacAdam Ellipse.
- 2. Reflector**
Photopia-Designed reflector.
- 3. Safety Glass**
Ultra white safety tempered glass cover.
Protect against mechanical impact.
Withstand the temperature up to 250°C.
- 4. Heat Sink**
Integrated CFC-ALØ heat sink.
Designed and tested under ambient thermal condition Ta 50°C.
- 5. Control Gear**
High quality constant current driver.
Conforms to safety and EMC regulation.
- 6. Body Housing**
Enhanced LM6 die-cast aluminum body.
Low copper content [<0.1%]
Utilize 16 stages pre-treatment and coating process.





SHOOTER



SHOOTER

Mini SHOOTER



SHOOTER

Application Type : On-ground
Subgroup : Uplight

SHOOTER/ 9900
Mini SHOOTER/ 9901
Mini SHOOTER – CV/ 9901

Luminaire Performance

190 – 4200 lm
8.4 – 41 W
16 – 127 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K/ RGBW

Controller

On-off/ 1-10V/ DALI/ Remote

Input Voltage

24Vdc
220-240VAC 50/60HZ

Accessories



Glare Shield
Ring



Anchor bolt



CV Driver

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code	
										REMOTE		
SHOOTER	OD-9900		12°	2700 K	3160 lm	117 lm/W	•				9900-5-3-506-XX	
	2700 K			3160 lm	117 lm/W			•		9900-5-5-506-XX		
	3000 K			3300 lm	122 lm/W			•		9900-5-5-887-XX		
		27 W	23°	3000 K	3190 lm	118 lm/W	•				9900-6-3-887-XX	
		27 W	48°	3000 K	2820 lm	104 lm/W	•				9900-7-3-887-XX	
				2700 K	2700 lm	100 lm/W		•			9900-7-4-506-XX	
	3000 K			2820 lm	104 lm/W			•		9900-7-5-887-XX		
	RGBW	32 W	25°	RGBW	1540 lm	48 lm/W			•		9900-B-5-686-XX	
		40 W	46°	RGBW	1350 lm	42 lm/W			•		9900-C-5-686-XX	
			15°	RGBW	1070 lm	26 lm/W			•		9900-A-5-440-XX	
			41 W	26°	RGBW	1060 lm	26 lm/W			•		9900-B-5-440-XX
		35°		RGBW	970 lm	24 lm/W			•		9900-C-5-440-XX	
48°		3000 K		4090 lm	99 lm/W	•				9900-7-3-902-XX		
Mini SHOOTER	OD-9901		Sharp Elliptical V	4000 K	4200 lm	102 lm/W	•				9900-7-3-905-XX	
	2700 K			190 lm	22 lm/W				•		9901-Q-7-797-XX	
	3000 K			190 lm	22 lm/W				•		9901-Q-7-798-XX	
	11 W	Sharp Elliptical V	4000 K	200 lm	23 lm/W				•		9901-Q-7-799-XX	
			2700 K	190 lm	17 lm/W	•					9901-Q-3-646-XX	
			3000 K	190 lm	17 lm/W	•					9901-Q-3-647-XX	
			4000 K	200 lm	18 lm/W	•					9901-Q-3-648-XX	
			2700 K	190 lm	17 lm/W		•				9901-Q-4-646-XX	
			3000 K	190 lm	17 lm/W		•				9901-Q-4-647-XX	
			4000 K	200 lm	18 lm/W		•				9901-Q-4-648-XX	
			2700 K	190 lm	17 lm/W			•			9901-Q-5-646-XX	
			3000 K	190 lm	17 lm/W			•			9901-Q-5-647-XX	
	13 W	Sharp Elliptical V	4000 K	200 lm	18 lm/W			•			9901-Q-5-648-XX	
			2700 K	260 lm	20 lm/W				•		9901-Q-7-759-XX	
			3000 K	260 lm	20 lm/W				•		9901-Q-7-760-XX	
	14 W	13°	4000 K	270 lm	20 lm/W				•		9901-Q-7-796-XX	
			3000 K	1710 lm	122 lm/W	•					9901-5-3-901-XX	
			4000 K	1790 lm	127 lm/W	•					9901-5-3-904-XX	
			3000 K	1640 lm	117 lm/W	•					9901-6-3-901-XX	
			2700 K	1560 lm	111 lm/W	•					9901-6-3-503-XX	
			42°	3000 K	1490 lm	106 lm/W	•					9901-7-3-901-XX
				4000 K	1560 lm	111 lm/W	•					9901-7-3-904-XX
				2700 K	260 lm	16 lm/W	•					9901-Q-3-630-XX
			16 W	Sharp Elliptical V	3000 K	260 lm	16 lm/W	•				
	4000 K	270 lm			16 lm/W	•					9901-Q-3-645-XX	
	2700 K	260 lm			16 lm/W		•				9901-Q-4-630-XX	
	3000 K	260 lm			16 lm/W		•				9901-Q-4-644-XX	
	4000 K	270 lm			16 lm/W		•				9901-Q-4-645-XX	
	2700 K	260 lm			16 lm/W			•			9901-Q-5-630-XX	
	3000 K	260 lm			16 lm/W			•			9901-Q-5-644-XX	
	4000 K	270 lm			16 lm/W			•			9901-Q-5-645-XX	

*Please contact sales team for special request.





GRAVITON is designed for all kind of uplight illumination tasks where high level of illumination is needed. It is able to withstand loads up to 1000KG. The luminaire is fitted with a pre-wired supply cable for inground application and internally potted to prevent humidity and condensation.


GRAVITON is available with COB LED light source with choices of beam and color temperature. It can be used to illuminate plants, flagpoles, columns, building facades and other architectural works. We highly recommend that the luminaire lay out should be considered during specifying and planning processes.




www.unilamp.co.th/en/p/graviton

Specification

- Designed, manufactured and tested according to IEC 60598.
- Stainless steel, LM6 die-cast aluminum and extruded aluminum housing.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- Anodized aluminum reflector.
- Post-cured silicone gasket.
- High quality LED module.
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.

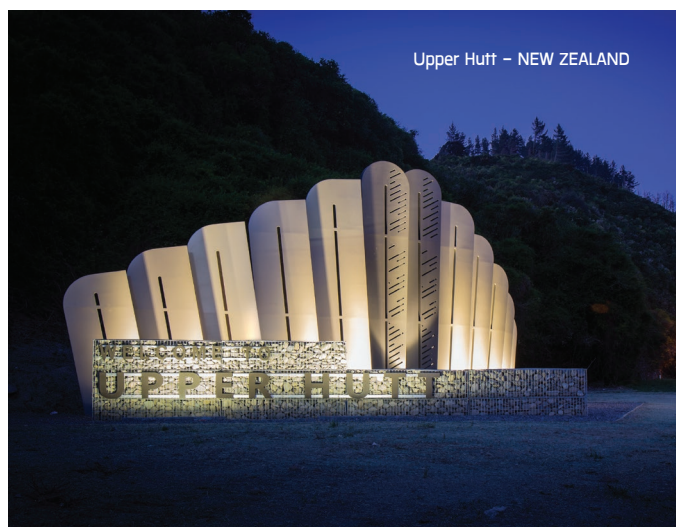

GRAVITON Round

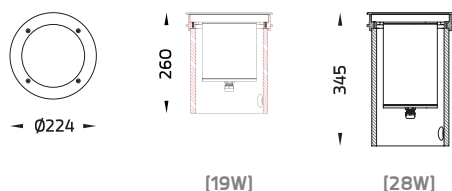

Accessories



GRAVITON


Application Type : Inground
Subgroup : Up light

GRAVITON Round/ 9091

Luminaire Performance

1960 – 3300 lm
19 – 28 W
96 – 130 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

On-Off/ DALI

Input Voltage

220–240VAC 50/60HZ

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller		Ordering Code
GRAVITON Round		19 W	12°	3000 K	2410 lm	126 lm/W	•		9091-5-3-887-91
				4000 K	2470 lm	130 lm/W	•		9091-5-3-891-91
				3000 K	2410 lm	126 lm/W		•	9091-5-5-887-91
			23°	2700 K	2220 lm	116 lm/W	•		9091-6-3-506-91
				3000 K	2330 lm	122 lm/W	•		9091-6-3-887-91
				4000 K	2380 lm	125 lm/W	•		9091-6-3-891-91
		28 W	12°	2700 K	1960 lm	103 lm/W	•		9091-7-3-506-91
				3000 K	2060 lm	108 lm/W	•		9091-7-3-887-91
				3000 K	3300 lm	117 lm/W	•		9091-5-3-902-91
			23°	3000 K	3190 lm	113 lm/W	•		9091-6-3-902-91
				2700 K	3050 lm	108 lm/W		•	9091-6-5-505-91
				3000 K	3190 lm	113 lm/W		•	9091-6-5-902-91
		48°		2700 K	2700 lm	96 lm/W	•		9091-7-3-505-91
				3000 K	2820 lm	100 lm/W	•		9091-7-3-902-91
				4000 K	2900 lm	103 lm/W	•		9091-7-3-905-91
				3000 K	2820 lm	100 lm/W		•	9091-7-5-902-91


*Please contact sales team for special request.

SIRIUS

- WALL SURFACE MOUNT
- UNDERWATER
- INGROUND
- CEILING MOUNT



SIRIUS a brand new linear light family features various mounting application types including in-ground walk over, wall mounted, ceiling mounted and suspension light. **SIRIUS** utilized the latest LED technology from world renowned manufactures with the choices of multiple light distributions. It offered narrow beam, medium beam, wide beam, asymmetric wall washer, wash glazing, bi-symmetric and much more. Thanks to a screw-less, clear and clean-cut design SIRIUS can be installed in most application where a decent architectural expression is required. Diversity types of connecting accessory is available for this linear light family.

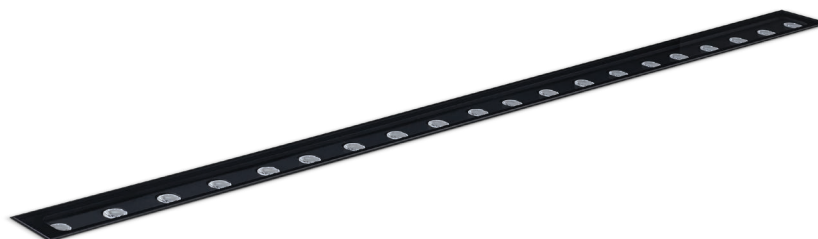

www.unilamp.co.th/en/p/sirius

Specification

- Designed, manufactured and tested according to IEC 60598.
- Pure aluminum and extruded aluminum housing.
- Stainless steel screws.
- Nano ceramic surface conversion.
- Double layer coating.
- Safety glass cover.
- High performance PC lens.
- Post-cured silicone gasket.
- High quality LED module.
- Pre-wired cable from the factory.
- Installation must be carried out according to the enclosed product manual.

Available Color



****Custom colors are available on request.**


The Residency Tower Pondicherry – INDIA





SIRIUS





SIRIUS 300/
SIRIUS 300 – CV




SIRIUS 600




SIRIUS 1200/
SIRIUS 1200 – CV

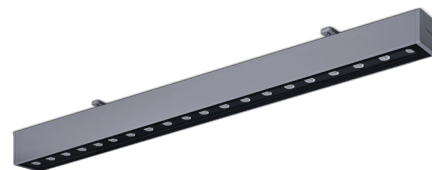

SIRIUS 600 – HI



SIRIUS 1200 – HI



SIRIUS

Application Type : Linear lighting
Subgroup : Ceiling mount

SIRIUS 300 / 4233
SIRIUS 300 – CV / 4233
SIRIUS 600 / 4231
SIRIUS 600 – HI / 4231
SIRIUS 1200 / 4232
SIRIUS 1200 – CV / 4232
SIRIUS 1200 – HI / 4232

Luminaire Performance

620 – 4860 lm
7.3 – 46 W
61 – 111 lm/W

Beam Options



Color Temperature

3000K/ 4000K


Controller

On-off/ 1-10/ DALI/ Remote

Input Voltage


24VDC
220-240Vac 50/60Hz

Accessories

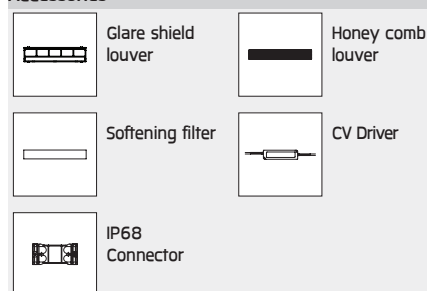





SIRIUS 300



SIRIUS 600



SIRIUS 1200



SIRIUS

Application Type : Linear lighting
Subgroup : Underwater

SIRIUS 600 / 7420
SIRIUS 1200 / 7421
SIRIUS 300 / 7422

Luminaire Performance

820 – 2840 lm
7.3 – 30 W
85 – 128 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K

Controller

Remote

Input Voltage

24VDC

Accessories



CV Driver




IP68
Connector



SIRIUS





SIRIUS 300/
SIRIUS 300 – CV




SIRIUS 600/
SIRIUS 600 – CV




SIRIUS 1200/
SIRIUS 1200 – CV

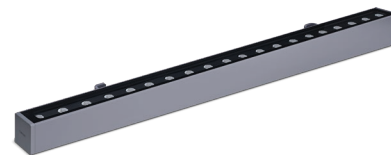

SIRIUS 600 – HI



SIRIUS 1200 – HI



SIRIUS


Application Type : Linear lighting
Subgroup : Wall surface mount

SIRIUS 300 / 8033
SIRIUS 300 – CV / 8033
SIRIUS 600 / 8031
SIRIUS 600 – CV / 8031
SIRIUS 600 – HI / 8031
SIRIUS 1200 / 8032
SIRIUS 1200 – CV / 8032
SIRIUS 1200 – HI / 8032

Luminaire Performance

370 – 4900 lm
5 – 46 W
60 – 111 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K


Controller

On–Off/ 1–10V/ DALI/ Remote

Input Voltage


24VDC
220–240Vac 50/60Hz

Accessories

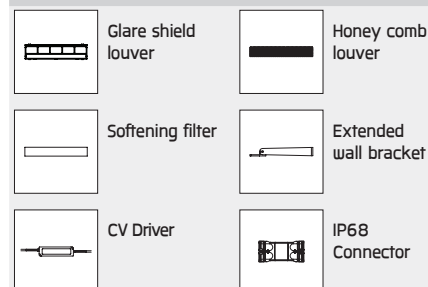





SIRIUS 300/
SIRIUS 300 – CV



SIRIUS 600



SIRIUS 1200



SIRIUS

Application Type : Linear lighting
Subgroup : Inground

SIRIUS 300 / 9068
SIRIUS 300 – CV / 9068
SIRIUS 600 / 9066
SIRIUS 1200 / 9067

Luminaire Performance

370 – 1650 lm
5 – 17 W
60 – 104 lm/W

Beam Options



Color Temperature

2700K/ 3000K/ 4000K


Controller

On–Off/ 1–10V/ DALI/ Remote

Input Voltage

24VDC
220–240Vac 50/60Hz

Accessories

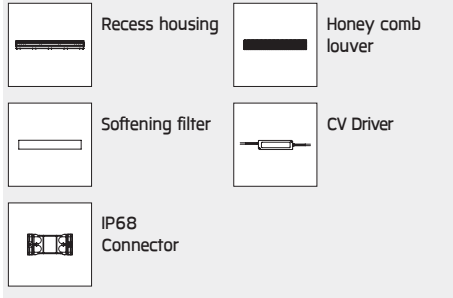

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code		
										REMOTE			
SIRIUS 600		13 W	46°/16°	3000 K	1040 lm	80 lm/W	•				4231-H-3-555-XX		
			17 W	30°	3000 K	1740 lm	102 lm/W	•				4231-C-3-542-XX	
				4000 K	1880 lm	110 lm/W	•				4231-C-3-543-XX		
	 HI	18 W	46°	3000 K	1370 lm	76 lm/W	•				4231-C-3-549-XX		
		25 W	75°	3000 K	2380 lm	95 lm/W	•			•	4231-E-3-540-XX		
			3000 K	2380 lm	95 lm/W			•		4231-E-5-540-XX			
		Asymmetric	4000 K	2480 lm	99 lm/W	•				4231-K-3-541-XX			
SIRIUS 1200		23 W	25°	3000 K	1870 lm	81 lm/W	•				4232-B-3-555-XX		
			46°	3000 K	1890 lm	82 lm/W	•				4232-C-3-555-XX		
			30 W	46°	3000 K	2600 lm	86 lm/W				•	4232-C-2-552-XX	
	4000 K	2790 lm		93 lm/W				•	4232-C-2-553-XX				
	32 W	30°	4000 K	3570 lm	111 lm/W		•			4232-C-4-543-XX			
		75°	3000 K	3280 lm	102 lm/W	•				4232-E-3-542-XX			
		3000 K	3280 lm	102 lm/W		•			4232-E-4-542-XX				
	 HI	33 W	Asymmetric	4000 K	3420 lm	106 lm/W	•				4232-K-3-543-XX		
			12°	3000 K	2900 lm	87 lm/W	•				4232-A-3-549-XX		
			46°	3000 K	2600 lm	78 lm/W	•				4232-C-3-549-XX		
		45 W	46°	4000 K	2790 lm	84 lm/W			•		4232-C-5-550-XX		
			Asymmetric	3000 K	2520 lm	76 lm/W			•		4232-K-5-549-XX		
			75°	3000 K	3560 lm	79 lm/W	•				4232-C-3-696-XX		
		46 W	75°	4000 K	4860 lm	105 lm/W	•				4232-E-3-541-XX		
			Asymmetric	3000 K	4370 lm	95 lm/W	•				4232-K-3-540-XX		
SIRIUS 300		7.3 W	46°	3000 K	640 lm	87 lm/W				•	4233-C-2-552-XX		
			Asymmetric	3000 K	620 lm	84 lm/W				•	4233-K-2-552-XX		
		11 W	46°	3000 K	680 lm	61 lm/W	•				4233-C-3-549-XX		
			46°/16°	3000 K	710 lm	64 lm/W	•				4233-H-3-549-XX		
		13 W	46°	3000 K	930 lm	71 lm/W	•				4233-C-3-696-XX		
			Asymmetric	3000 K	910 lm	70 lm/W	•				4233-K-3-696-XX		
		4000 K	960 lm	73 lm/W	•				4233-K-3-697-XX				
SIRIUS 600		10 W	12°	3000 K	1000 lm	100 lm/W				•	7420-A-2-558-91		
			25°	3000 K	990 lm	99 lm/W				•	7420-B-2-558-91		
			46°	3000 K	980 lm	98 lm/W				•	7420-C-2-558-91		
				4000 K	1050 lm	105 lm/W				•	7420-C-2-559-91		
			46°/16°	3000 K	1010 lm	101 lm/W				•	7420-H-2-558-91		
		15 W	12°	2700 K	1380 lm	92 lm/W				•	7420-A-2-551-91		
			25°	2700 K	1360 lm	90 lm/W				•	7420-B-2-551-91		
			3000 K	1360 lm	90 lm/W				•	7420-B-2-552-91			
			46°/16°	3000 K	1390 lm	92 lm/W				•	7420-H-2-552-91		
SIRIUS 1200		20 W	12°	3000 K	1900 lm	95 lm/W				•	7421-A-2-558-91		
				4000 K	2040 lm	102 lm/W				•	7421-A-2-559-91		
			25°	3000 K	1880 lm	94 lm/W				•	7421-B-2-558-91		
			46°	4000 K	1990 lm	99 lm/W				•	7421-C-2-559-91		
			46°/16°	3000 K	1920 lm	96 lm/W				•	7421-H-2-558-91		
		30 W	46°/16°	4000 K	2060 lm	103 lm/W				•	7421-H-2-559-91		
			12°	2700 K	2610 lm	87 lm/W				•	7421-A-2-551-91		
			46°	3000 K	2560 lm	85 lm/W				•	7421-C-2-552-91		
			4000 K	2750 lm	91 lm/W				•	7421-C-2-553-91			
		46°/16°	4000 K	2840 lm	94 lm/W				•	7421-H-2-553-91			
SIRIUS 300		7.3 W	12°	3000 K	880 lm	120 lm/W				•	7422-A-2-552-91		
				4000 K	940 lm	128 lm/W				•	7422-A-2-553-91		
			25°	2700 K	840 lm	115 lm/W				•	7422-B-2-551-91		
			3000 K	840 lm	115 lm/W				•	7422-B-2-552-91			
			46°/16°	3000 K	820 lm	112 lm/W				•	7422-H-2-552-91		
SIRIUS 600	 HI	10 W	12°	2700 K	820 lm	82 lm/W	•				8031-A-3-474-XX		
				3000 K	820 lm	82 lm/W	•				8031-A-3-475-XX		
				4000 K	870 lm	87 lm/W	•				8031-A-3-476-XX		
				2700 K	730 lm	73 lm/W	•				8031-B-3-474-XX		
				3000 K	730 lm	73 lm/W	•				8031-B-3-475-XX		
			25°	4000 K	770 lm	77 lm/W	•				8031-B-3-476-XX		
				2700 K	730 lm	73 lm/W	•				8031-C-3-474-XX		
				3000 K	730 lm	73 lm/W	•				8031-C-3-475-XX		
				4000 K	780 lm	78 lm/W	•				8031-C-3-476-XX		
				2700 K	710 lm	71 lm/W	•				8031-K-3-474-XX		
			 HI		Asymmetric	3000 K	710 lm	71 lm/W	•				8031-K-3-475-XX
						4000 K	750 lm	75 lm/W	•				8031-K-3-476-XX
						2700 K	770 lm	77 lm/W	•				8031-H-3-474-XX
						3000 K	770 lm	77 lm/W	•				8031-H-3-475-XX
						4000 K	810 lm	81 lm/W	•				8031-H-3-476-XX
		13 W	12°	3000 K	1110 lm	85 lm/W	•				8031-A-3-555-XX		
			25°	3000 K	980 lm	75 lm/W	•				8031-B-3-555-XX		
			46°/16°	3000 K	1040 lm	80 lm/W	•				8031-H-3-555-XX		
		15 W	12°	3000 K	1530 lm	102 lm/W				•	8031-A-2-552-XX		
			25°	3000 K	1360 lm	90 lm/W				•	8031-B-2-552-XX		
			46°	3000 K	1370 lm	91 lm/W				•	8031-C-2-552-XX		
			Asymmetric	2700 K	1330 lm	88 lm/W				•	8031-K-2-551-XX		
			46°/16°	3000 K	1430 lm	95 lm/W				•	8031-H-2-552-XX		
				4000 K	1540 lm	102 lm/W				•	8031-H-2-553-XX		

*Please contact sales team for special request.

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code		
										REMOTE			
SIRIUS 600	OD-8031	 	17 W	30°	3000 K 4000 K	1740 lm 1880 lm	102 lm/W 110 lm/W	• •				8031-C-3-542-XX 8031-C-3-543-XX	
	75°			3000 K 4000 K	1730 lm 1860 lm	101 lm/W 109 lm/W	• •			8031-E-3-542-XX 8031-E-3-543-XX			
	Asymmetric		3000 K 4000 K	1670 lm 1800 lm	98 lm/W 105 lm/W	• •			8031-K-3-542-XX 8031-K-3-543-XX				
	18 W		12°	3000 K 2700 K	1530 lm 1530 lm	85 lm/W 85 lm/W	• •		•	8031-A-3-549-XX 8031-A-5-548-XX			
			25°	2700 K 3000 K 4000 K	1360 lm 1360 lm 1460 lm	75 lm/W 75 lm/W 81 lm/W	• • •			8031-B-3-548-XX 8031-B-3-549-XX 8031-B-3-550-XX			
			46°	3000 K 2700 K	1370 lm 1370 lm	76 lm/W 76 lm/W	• •	•		8031-C-3-549-XX 8031-C-4-548-XX			
		Asymmetric 46°/16°	3000 K 3000 K	1330 lm 1430 lm	73 lm/W 79 lm/W	• •			8031-K-3-549-XX 8031-H-3-549-XX				
		24 W	12°	3000 K	2090 lm	87 lm/W	•			8031-A-3-696-XX			
			Asymmetric	3000 K	1820 lm	75 lm/W	•			8031-K-3-696-XX			
	25 W	30°	3000 K 4000 K	2400 lm 2580 lm	96 lm/W 103 lm/W	• •			8031-C-3-540-XX 8031-C-3-541-XX				
		75°	3000 K	2380 lm	95 lm/W	•			8031-E-3-540-XX				
		Asymmetric	3000 K	2300 lm	92 lm/W	•			8031-K-3-540-XX				
			3000 K	2300 lm	92 lm/W			•	8031-K-5-540-XX				
	SIRIUS 1200	OD-8032	 	17 W	12°	2700 K 3000 K 4000 K	1550 lm 1550 lm 1650 lm	91 lm/W 91 lm/W 97 lm/W	• • •				8032-A-3-474-XX 8032-A-3-475-XX 8032-A-3-476-XX
25°		2700 K 3000 K 4000 K				1380 lm 1380 lm 1470 lm	81 lm/W 81 lm/W 86 lm/W	• • •			8032-B-3-474-XX 8032-B-3-475-XX 8032-B-3-476-XX		
		46°				2700 K 3000 K 4000 K	1390 lm 1390 lm 1480 lm	81 lm/W 81 lm/W 87 lm/W	• • •			8032-C-3-474-XX 8032-C-3-475-XX 8032-C-3-476-XX	
					Asymmetric	2700 K 3000 K 4000 K	1350 lm 1350 lm 1430 lm	79 lm/W 79 lm/W 84 lm/W	• • •			8032-K-3-474-XX 8032-K-3-475-XX 8032-K-3-476-XX	
23 W						46°/16°	2700 K 3000 K 4000 K	1460 lm 1460 lm 1540 lm	85 lm/W 85 lm/W 90 lm/W	• • •			8032-H-3-474-XX 8032-H-3-475-XX 8032-H-3-476-XX
		12°					3000 K 25°	2100 lm 1870 lm	91 lm/W 81 lm/W	• •			8032-A-3-555-XX 8032-B-3-555-XX
					46°		2700 K 3000 K	1890 lm 1890 lm	82 lm/W 82 lm/W	• •			8032-C-3-554-XX 8032-C-3-555-XX
						30 W	12°	2700 K 3000 K	2900 lm 2900 lm	96 lm/W 96 lm/W			• •
		25°						3000 K 4000 K	2580 lm 2600 lm 2520 lm	86 lm/W 86 lm/W 84 lm/W			• • •
				46°/16°	3000 K 4000 K		2720 lm 2920 lm	90 lm/W 97 lm/W			• •	8032-H-2-552-XX 8032-H-2-553-XX	
32 W		30°			3000 K 4000 K		3300 lm 3570 lm	103 lm/W 111 lm/W	• •	•			8032-C-3-542-XX 8032-C-4-543-XX
				75°	3000 K 3000 K	3280 lm 3280 lm	102 lm/W 102 lm/W			•		8032-E-3-542-XX 8032-E-5-542-XX	
					Asymmetric	3000 K 3000 K	3170 lm 3170 lm	99 lm/W 99 lm/W	• •		•		8032-K-3-542-XX 8032-K-5-542-XX
		33 W		12°		3000 K 4000 K 2700 K	2900 lm 3110 lm 2900 lm	87 lm/W 94 lm/W 87 lm/W	• • •		•		8032-A-3-549-XX 8032-A-3-550-XX 8032-A-4-548-XX
					25°	3000 K 2700 K 2700 K	2580 lm 2580 lm 2600 lm	78 lm/W 78 lm/W 78 lm/W	• • •		•		8032-B-3-549-XX 8032-B-5-548-XX 8032-C-3-548-XX
						46°	3000 K 4000 K 3000 K	2600 lm 2790 lm 2600 lm	78 lm/W 84 lm/W 78 lm/W			• •	
Asymmetric							3000 K 3000 K 4000 K	2520 lm 2520 lm 2700 lm	76 lm/W 76 lm/W 81 lm/W	• • •		• •	
					46°/16°		2700 K 3000 K	2720 lm 2720 lm	82 lm/W 82 lm/W	• •		•	
						45 W	12°	3000 K 3000 K	3970 lm 3450 lm	88 lm/W 76 lm/W	• •		
Asymmetric				3000 K				3450 lm	76 lm/W			•	
				46°/16°			3000 K	3720 lm	82 lm/W	•			
46 W			30°				4000 K	4900 lm	106 lm/W	•			
						75°	3000 K 4000 K	4860 lm 4860 lm	105 lm/W 105 lm/W	• •			
			Asymmetric		3000 K 4000 K		4370 lm 4710 lm	95 lm/W 102 lm/W	• •				8032-K-3-540-XX 8032-K-3-541-XX

SIRIUS 300

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code
									REMOTE	
00-8033 	5 W	12°	2700 K	430 lm	86 lm/W	•				8033-A-3-474-XX
			3000 K	430 lm	86 lm/W	•				8033-A-3-475-XX
			4000 K	450 lm	90 lm/W	•				8033-A-3-476-XX
		25°	2700 K	370 lm	74 lm/W	•				8033-B-3-474-XX
			3000 K	370 lm	74 lm/W	•				8033-B-3-475-XX
			4000 K	400 lm	80 lm/W	•				8033-B-3-476-XX
		46°	2700 K	380 lm	76 lm/W	•				8033-C-3-474-XX
			3000 K	380 lm	76 lm/W	•				8033-C-3-475-XX
			4000 K	400 lm	80 lm/W	•				8033-C-3-476-XX
		Asymmetric	2700 K	370 lm	74 lm/W	•				8033-K-3-474-XX
			3000 K	370 lm	74 lm/W	•				8033-K-3-475-XX
			4000 K	390 lm	78 lm/W	•				8033-K-3-476-XX
		46°/16°	2700 K	400 lm	80 lm/W	•				8033-H-3-474-XX
			3000 K	400 lm	80 lm/W	•				8033-H-3-475-XX
			4000 K	420 lm	84 lm/W	•				8033-H-3-476-XX
	7.3 W	12°	2700 K	700 lm	95 lm/W				•	8033-A-2-551-XX
			3000 K	700 lm	95 lm/W				•	8033-A-2-552-XX
			4000 K	760 lm	104 lm/W				•	8033-A-2-553-XX
		25°	2700 K	630 lm	86 lm/W				•	8033-B-2-551-XX
			3000 K	630 lm	86 lm/W				•	8033-B-2-552-XX
			4000 K	680 lm	93 lm/W				•	8033-B-2-553-XX
		46°	2700 K	640 lm	87 lm/W				•	8033-C-2-551-XX
			3000 K	640 lm	87 lm/W				•	8033-C-2-552-XX
			4000 K	690 lm	94 lm/W				•	8033-C-2-553-XX
		Asymmetric	2700 K	620 lm	84 lm/W				•	8033-K-2-551-XX
			3000 K	620 lm	84 lm/W				•	8033-K-2-552-XX
			4000 K	660 lm	90 lm/W				•	8033-K-2-553-XX
		46°/16°	2700 K	660 lm	90 lm/W				•	8033-H-2-551-XX
			3000 K	660 lm	90 lm/W				•	8033-H-2-552-XX
			4000 K	720 lm	98 lm/W				•	8033-H-2-553-XX
	7.6 W	25° 46° Asymmetric 46°/16°	RGBW	660 lm	86 lm/W				•	8033-B-2-688-XX
			RGBW	740 lm	97 lm/W				•	8033-C-2-688-XX
			RGBW	620 lm	81 lm/W				•	8033-K-2-688-XX
			RGBW	780 lm	102 lm/W				•	8033-H-2-688-XX
			2700 K	760 lm	69 lm/W	•				8033-A-3-548-XX
			3000 K	760 lm	69 lm/W	•				8033-A-3-549-XX
	11 W	12°	4000 K	810 lm	73 lm/W	•				8033-A-3-550-XX
			2700 K	760 lm	69 lm/W			•		8033-A-5-548-XX
			3000 K	760 lm	69 lm/W			•		8033-A-5-549-XX
			4000 K	810 lm	73 lm/W			•		8033-A-5-550-XX
			2700 K	760 lm	69 lm/W		•			8033-A-4-548-XX
			3000 K	760 lm	69 lm/W		•			8033-A-4-549-XX
		25°	4000 K	810 lm	73 lm/W		•			8033-A-4-550-XX
			2700 K	670 lm	60 lm/W	•				8033-B-3-548-XX
			3000 K	670 lm	60 lm/W	•				8033-B-3-549-XX
			4000 K	730 lm	66 lm/W	•				8033-B-3-550-XX
			2700 K	670 lm	60 lm/W			•		8033-B-5-548-XX
			3000 K	670 lm	60 lm/W			•		8033-B-5-549-XX
	11 W	46°	4000 K	730 lm	66 lm/W			•		8033-B-5-550-XX
			2700 K	670 lm	60 lm/W		•			8033-B-4-548-XX
			3000 K	670 lm	60 lm/W		•			8033-B-4-549-XX
			4000 K	730 lm	66 lm/W		•			8033-B-4-550-XX
			2700 K	680 lm	61 lm/W	•				8033-C-3-548-XX
			3000 K	680 lm	61 lm/W	•				8033-C-3-549-XX
		Asymmetric	4000 K	730 lm	66 lm/W	•				8033-C-3-550-XX
			2700 K	680 lm	61 lm/W			•		8033-C-5-548-XX
			3000 K	680 lm	61 lm/W			•		8033-C-5-549-XX
			4000 K	730 lm	66 lm/W			•		8033-C-5-550-XX
			2700 K	680 lm	61 lm/W		•			8033-C-4-548-XX
			3000 K	680 lm	61 lm/W		•			8033-C-4-549-XX
	11 W	12°	4000 K	730 lm	66 lm/W		•			8033-C-4-550-XX
			2700 K	660 lm	60 lm/W	•				8033-K-3-548-XX
			3000 K	660 lm	60 lm/W	•				8033-K-3-549-XX
			4000 K	710 lm	64 lm/W	•				8033-K-3-550-XX
			2700 K	660 lm	60 lm/W			•		8033-K-5-548-XX
			3000 K	660 lm	60 lm/W			•		8033-K-5-549-XX
		46°/16°	4000 K	710 lm	64 lm/W			•		8033-K-5-550-XX
			2700 K	660 lm	60 lm/W		•			8033-K-4-548-XX
			3000 K	660 lm	60 lm/W		•			8033-K-4-549-XX
			4000 K	710 lm	64 lm/W		•			8033-K-4-550-XX
			2700 K	710 lm	64 lm/W	•				8033-H-3-548-XX
			3000 K	710 lm	64 lm/W	•				8033-H-3-549-XX
	11 W	25°	4000 K	760 lm	69 lm/W	•				8033-H-3-550-XX
			2700 K	710 lm	64 lm/W			•		8033-H-5-548-XX
			3000 K	710 lm	64 lm/W			•		8033-H-5-549-XX
			4000 K	760 lm	69 lm/W			•		8033-H-5-550-XX
			2700 K	710 lm	64 lm/W		•			8033-H-4-548-XX
			3000 K	710 lm	64 lm/W		•			8033-H-4-549-XX
	13 W	12°	4000 K	760 lm	69 lm/W		•			8033-H-4-550-XX
			2700 K	710 lm	64 lm/W	•				8033-A-3-696-XX
			3000 K	970 lm	74 lm/W	•				8033-H-3-696-XX
		46°/16°	2700 K	710 lm	64 lm/W					8033-A-3-696-XX
			3000 K	970 lm	74 lm/W					8033-H-3-696-XX
			4000 K	1040 lm	80 lm/W					8033-H-3-696-XX

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code
										REMOTE	
SIRIUS 600	OD-9066 	10 W	12°	2700 K	820 lm	82 lm/W	•				9066-A-3-474-01
				3000 K	820 lm	82 lm/W	•				9066-A-3-475-01
				4000 K	870 lm	87 lm/W	•				9066-A-3-476-01
			25°	2700 K	730 lm	73 lm/W	•				9066-B-3-474-01
				3000 K	730 lm	73 lm/W	•				9066-B-3-475-01
				4000 K	770 lm	77 lm/W	•				9066-B-3-476-01
			46°	2700 K	730 lm	73 lm/W	•				9066-C-3-474-01
				3000 K	730 lm	73 lm/W	•				9066-C-3-475-01
				4000 K	780 lm	78 lm/W	•				9066-C-3-476-01
			Asymmetric	2700 K	710 lm	71 lm/W	•				9066-K-3-474-01
				3000 K	710 lm	71 lm/W	•				9066-K-3-475-01
				4000 K	750 lm	75 lm/W	•				9066-K-3-476-01
		46°/16°		2700 K	770 lm	77 lm/W	•				9066-H-3-474-01
				3000 K	770 lm	77 lm/W	•				9066-H-3-475-01
				4000 K	810 lm	81 lm/W	•				9066-H-3-476-01
SIRIUS 1200	OD-9067 	17 W	12°	2700 K	1550 lm	91 lm/W	•				9067-A-3-474-01
				3000 K	1550 lm	91 lm/W	•				9067-A-3-475-01
				4000 K	1650 lm	97 lm/W	•				9067-A-3-476-01
			25°	2700 K	1380 lm	81 lm/W	•				9067-B-3-474-01
				3000 K	1380 lm	81 lm/W	•				9067-B-3-475-01
				4000 K	1470 lm	86 lm/W	•				9067-B-3-476-01
			46°	2700 K	1390 lm	81 lm/W	•				9067-C-3-474-01
				3000 K	1390 lm	81 lm/W	•				9067-C-3-475-01
				4000 K	1480 lm	87 lm/W	•				9067-C-3-476-01
			Asymmetric	2700 K	1350 lm	79 lm/W	•				9067-K-3-474-01
				3000 K	1350 lm	79 lm/W	•				9067-K-3-475-01
				4000 K	1430 lm	84 lm/W	•				9067-K-3-476-01
		46°/16°		2700 K	1460 lm	85 lm/W	•				9067-H-3-474-01
				3000 K	1460 lm	85 lm/W	•				9067-H-3-475-01
				4000 K	1540 lm	90 lm/W	•				9067-H-3-476-01
SIRIUS 300	OD-9068 	5 W	12°	2700 K	430 lm	86 lm/W	•				9068-A-3-474-01
				3000 K	430 lm	86 lm/W	•				9068-A-3-475-01
				4000 K	450 lm	90 lm/W	•				9068-A-3-476-01
			25°	2700 K	370 lm	74 lm/W	•				9068-B-3-474-01
				3000 K	370 lm	74 lm/W	•				9068-B-3-475-01
				4000 K	400 lm	80 lm/W	•				9068-B-3-476-01
			46°	2700 K	380 lm	76 lm/W	•				9068-C-3-474-01
				3000 K	380 lm	76 lm/W	•				9068-C-3-475-01
				4000 K	400 lm	80 lm/W	•				9068-C-3-476-01
			Asymmetric	2700 K	370 lm	74 lm/W	•				9068-K-3-474-01
				3000 K	370 lm	74 lm/W	•				9068-K-3-475-01
				4000 K	390 lm	78 lm/W	•				9068-K-3-476-01
		46°/16°		2700 K	400 lm	80 lm/W	•				9068-H-3-474-01
				3000 K	400 lm	80 lm/W	•				9068-H-3-475-01
				4000 K	420 lm	84 lm/W	•				9068-H-3-476-01
		12°		2700 K	700 lm	95 lm/W				•	9068-A-2-551-01
				3000 K	700 lm	95 lm/W				•	9068-A-2-552-01
				4000 K	760 lm	104 lm/W				•	9068-A-2-553-01
		25°		2700 K	630 lm	86 lm/W				•	9068-B-2-551-01
				3000 K	630 lm	86 lm/W				•	9068-B-2-552-01
				4000 K	680 lm	93 lm/W				•	9068-B-2-553-01
		46°		2700 K	640 lm	87 lm/W				•	9068-C-2-551-01
				3000 K	640 lm	87 lm/W				•	9068-C-2-552-01
				4000 K	690 lm	94 lm/W				•	9068-C-2-553-01
		Asymmetric		2700 K	620 lm	84 lm/W				•	9068-K-2-551-01
				3000 K	620 lm	84 lm/W				•	9068-K-2-552-01
				4000 K	660 lm	90 lm/W				•	9068-K-2-553-01
		46°/16°		2700 K	660 lm	90 lm/W				•	9068-H-2-551-01
				3000 K	660 lm	90 lm/W				•	9068-H-2-552-01
				4000 K	720 lm	98 lm/W				•	9068-H-2-553-01
		11 W	12°	2700 K	760 lm	69 lm/W	•				9068-A-3-548-01
				3000 K	760 lm	69 lm/W	•				9068-A-3-549-01
				4000 K	810 lm	73 lm/W	•				9068-A-3-550-01
				2700 K	760 lm	69 lm/W			•		9068-A-5-548-01
				3000 K	760 lm	69 lm/W		•			9068-A-5-549-01
				4000 K	810 lm	73 lm/W		•			9068-A-5-550-01
		11 W	25°	2700 K	670 lm	60 lm/W	•				9068-B-3-548-01
				3000 K	670 lm	60 lm/W	•				9068-B-3-549-01
				4000 K	730 lm	66 lm/W	•				9068-B-3-550-01
				2700 K	670 lm	60 lm/W			•		9068-B-5-548-01
				3000 K	670 lm	60 lm/W			•		9068-B-5-549-01
				4000 K	730 lm	66 lm/W			•		9068-B-5-550-01
				2700 K	670 lm	60 lm/W		•			9068-B-4-548-01
				3000 K	670 lm	60 lm/W		•			9068-B-4-549-01
				4000 K	730 lm	66 lm/W		•			9068-B-4-550-01

Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller				Ordering Code
									REMOTE	
00-9068		46°	2700 K	680 lm	61 lm/W	•				9068-C-3-548-01
			3000 K	680 lm	61 lm/W	•				9068-C-3-549-01
			4000 K	730 lm	66 lm/W	•				9068-C-3-550-01
			2700 K	680 lm	61 lm/W			•		9068-C-5-548-01
			3000 K	680 lm	61 lm/W			•		9068-C-5-549-01
			4000 K	730 lm	66 lm/W			•		9068-C-5-550-01
		Asymmetric	2700 K	680 lm	61 lm/W		•			9068-C-4-548-01
			3000 K	680 lm	61 lm/W		•			9068-C-4-549-01
			4000 K	730 lm	66 lm/W		•			9068-C-4-550-01
			2700 K	660 lm	60 lm/W	•				9068-K-3-548-01
			3000 K	660 lm	60 lm/W	•				9068-K-3-549-01
			4000 K	710 lm	64 lm/W	•				9068-K-3-550-01
	11 W	Asymmetric	2700 K	660 lm	60 lm/W			•		9068-K-5-548-01
			3000 K	660 lm	60 lm/W			•		9068-K-5-549-01
			4000 K	710 lm	64 lm/W			•		9068-K-5-550-01
			2700 K	660 lm	60 lm/W		•			9068-K-4-548-01
			3000 K	660 lm	60 lm/W		•			9068-K-4-549-01
			4000 K	710 lm	64 lm/W		•			9068-K-4-550-01
		46°/16°	2700 K	710 lm	64 lm/W	•				9068-H-3-548-01
			3000 K	710 lm	64 lm/W	•				9068-H-3-549-01
			4000 K	760 lm	69 lm/W	•				9068-H-3-550-01
			2700 K	710 lm	64 lm/W			•		9068-H-5-548-01
			3000 K	710 lm	64 lm/W			•		9068-H-5-549-01
			4000 K	760 lm	69 lm/W			•		9068-H-5-550-01
	11 W	46°/16°	2700 K	710 lm	64 lm/W		•			9068-H-4-548-01
			3000 K	710 lm	64 lm/W		•			9068-H-4-549-01
			4000 K	760 lm	69 lm/W		•			9068-H-4-550-01

Private Residence – THAILAND




Living Complex, Bangkok – THAILAND




NEWLY Added LuxBeat




■ LINEAR LIGHTING

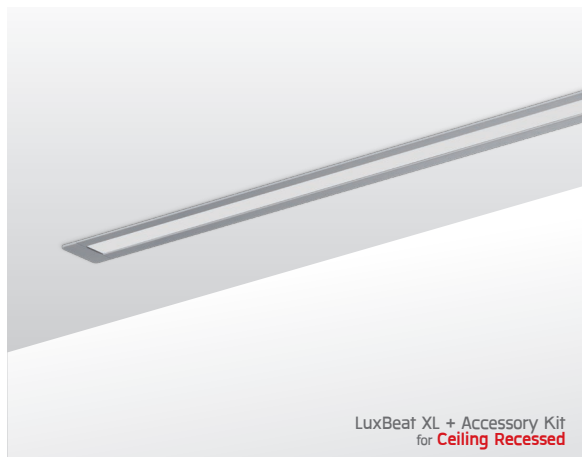


LuxBeat XL + Accessory Kit
for **Ceiling Recessed**

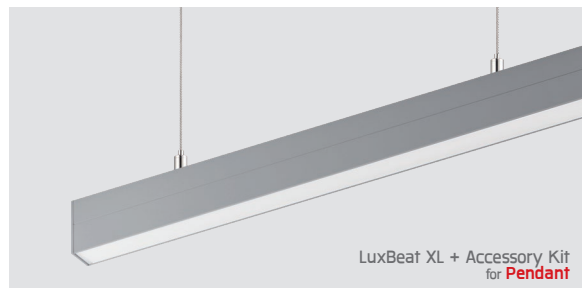


LuxBeat XL + Accessory Kit
for **Pendant**

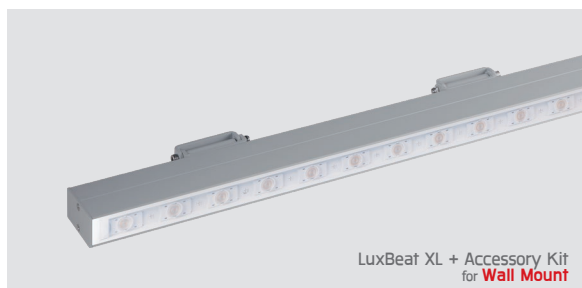

LuxBeat XL + Accessory Kit
for **Wall Mount**

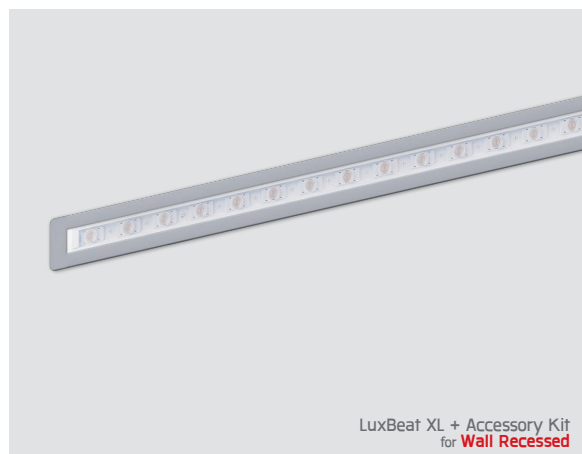

LuxBeat XL + Accessory Kit
for **Wall Recessed**

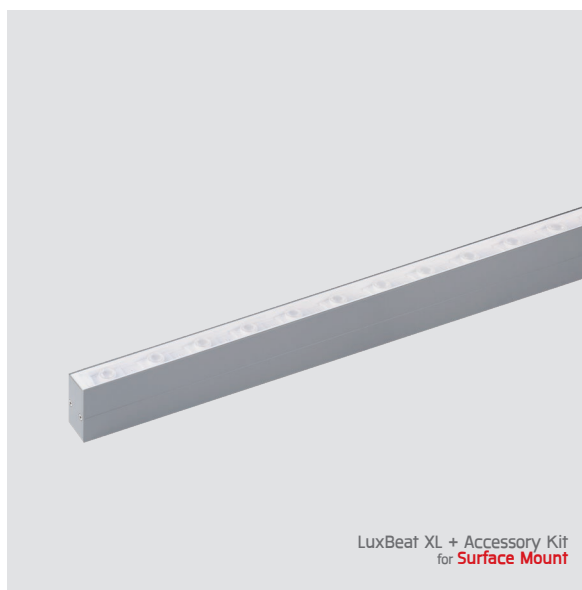

LuxBeat XL + Accessory Kit
for **Surface Mount**



LuxBeat



LuxBeat
Underwater

LuxBeat and **LuxBeat XL** are a range of miniature-sized linear accent luminaires with flexible and fixed mounting applications. The patented optical system emits homogenous light regardless of the viewing direction. The wide range of mounting accessories allows trouble-free installation. The innovative mounting channels combine secure luminaire attachment and cable management in one.



www.unilamp.co.th/en/p/luxbeat

LuxBeat Features:

- IP67 for indoor/ outdoor application.
- No heat sink required. Extra heat sink is recommended if Ta is over 40°C
- High quality silicone extrusion housing.
- Dot-free linear and homogeneous lighting performance.
- Very flexible top-bend style in ultra-thin appearance.
- Infield cutting and assembly (if needed).
- Simple mounted on clean surface by 3M tape (supplied with the strip).
- Or stainless steel mounting bracket (available as accessory).
- Perfect color consistency and uniformity.
- High light efficacy.
- No dark angle emitting part on both ends.

LuxBeat XL/ LuxBeat Underwater Features:

- IP67/ IP68 for indoor/ outdoor application.
- Supplied with IP67 cable feeding in-out for continuous installation.
- High quality silicone extrusion housing.
- Dot-free linear and homogeneous lighting performance (diffused version).
- Various mounting options.
- Choices of diffused light or with optical lens.
- Perfect color consistency and uniformity.
- High light efficacy.
- No dark angle emitting part on both ends (diffused version).
- Custom length is available (prepared by the factory).

Notice:

- Use suitable power supply with at least 20% power reserve.
- Maximum continuous installation length is 5m. Longer installation runs will result in electrical overload and excessive heat.
- Check correct polarity before power on.
- For outdoor application, make sure that proper silicone gluing is in place in order to maintain IP67 rating.
- Minimal bending diameter 30 mm. smaller bending diameter causes damage to the LED module.
- Installation, dismantling and repairs must be carried out by qualified electrician.

Available Color

****Custom colors are available on request.**

NEW!


└
LuxBeat XL

NEW!

└
LuxBeat Underwater

└
LuxBeat

LuxBeat XL + Accessory Kit

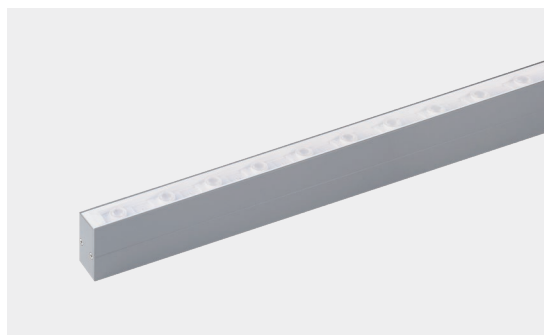

▪ LuxBeat XL + Accessory kit for Surface Mount




8111/ 8112/ 8113
LuxBeat XL

OR



8111/ 8112/ 8113
LuxBeat XL

+



AUN-MOT-0014-XX/
AUN-MOT-0015-XX/
AUN-MOT-0016-XX
Surface mount
profile

▪ LuxBeat XL + Accessory kit for Wall Mount




8111/ 8112/ 8113
LuxBeat XL

OR



8111/ 8112/ 8113
LuxBeat XL

+




AUN-MOT-0014-XX/
AUN-MOT-0015-XX/
AUN-MOT-0016-XX
Surface mount
profile

+



AUN-BRK-0007-XX
Mounting bracket,
adjustable

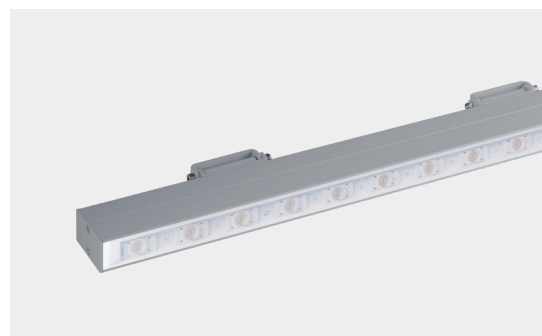


▪ LuxBeat XL + Accessory kit for Pendant




8111/ 8112/ 8113
LuxBeat XL

OR



8111/ 8112/ 8113
LuxBeat XL

+



AUN-MOT-0014-XX/
AUN-MOT-0015-XX/
AUN-MOT-0016-XX
Surface mount
profile

+



ATR-MOT-0001-00
Suspension kit, with
mounting loop

OR



ATR-MOT-0002-00
Suspension kit, with
mounting post

■ **LuxBeat XL + Accessory kit**
for Ceiling Recessed




8111/ 8112/ 8113
LuxBeat XL

OR





8111/ 8112/ 8113
LuxBeat XL

+



AUN-RCH-0013-XX/
AUN-RCH-0014-XX/
AUN-RCH-0015-XX/
Recessed ceiling
mounting profile

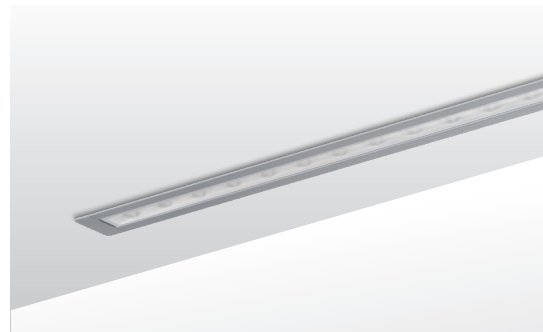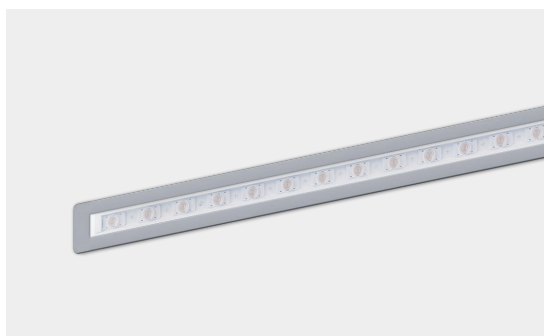

■ **LuxBeat XL + Accessory kit**
for Wall Recessed



8111/ 8112/ 8113
LuxBeat XL

OR



8111/ 8112/ 8113
LuxBeat XL

+



AUN-RCH-0026-XX/
AUN-RCH-0027-XX/
AUN-RCH-0028-XX/
Plasterboard wall
mounting profile

OR




AUN-RCH-0029-XX/
AUN-RCH-0030-XX/
AUN-RCH-0031-XX/
Wall niche mounting
profile



LuxBeat



LuxBeat

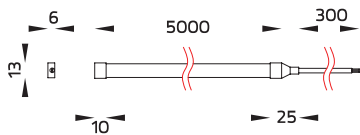

LuxBeat

Application Type : Linear Light
Subgroup : Accent linear

LuxBeat / 8101

Luminaire Performance

680 – 2030 lm/M
7 – 14 W/M
97 – 145 lm/W/M

Beam Options



Color Temperature


3000K/ 4000K

Controller

Remote

Input Options

24Vdc

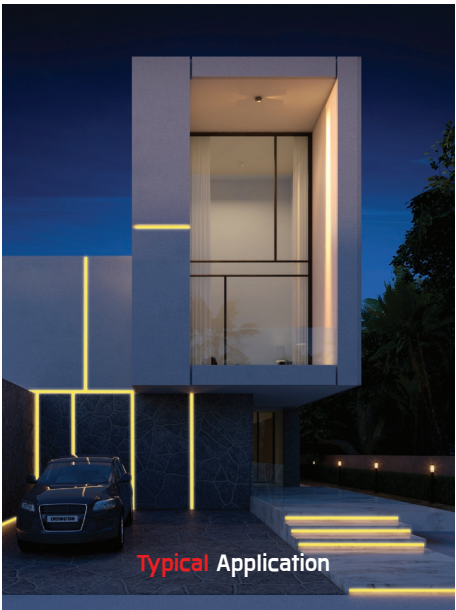

Typical Application

Accessories



Power Cable Kit



Fixing Bracket



IP68
Connector



CV Driver




LuxBeat XL 500/ LuxBeat XL 1000/ LuxBeat XL 2000

NEW!


Diffused Version



Optical Lens

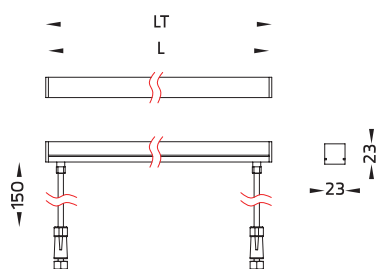

Model	L	LT
OD-8111 LED	500	506
OD-8112 LED	1000	1006
OD-8113 LED	2000	2006



LuxBeat XL

Application Type : Linear Light
Subgroup : Accent linear

LuxBeat XL 500 / 8111

LuxBeat XL 1000 / 8112

LuxBeat XL 2000 / 8113

Luminaire Performance

210 – 3920 lm/M

9 – 36 W

23 – 108 lm/W/M

Beam Options



Color Temperature

3000K/ RGBW

Controller

Remote

Input Options

24Vdc

Accessories



Input Cable



Aluminium Profile



Suspension Kit



Adjustable Bracket



Mounting Profile
for Ceiling
Recessed

Mounting Profile
for Wall Recessed


CV Driver



LuxBeat Underwater 500 / LuxBeat Underwater 1000 / LuxBeat Underwater 2000 NEW!

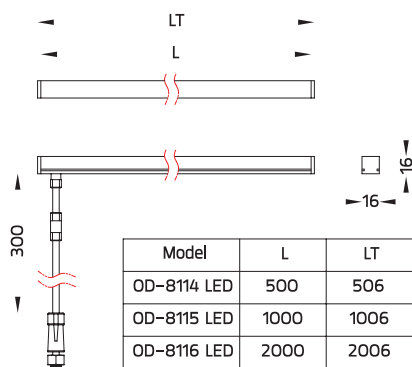

LuxBeat

Application Type : Linear Light
Subgroup : Underwater

LuxBeat Underwater 500 / 8114
LuxBeat Underwater 1000 / 8115
LuxBeat Underwater 2000 / 8116

Luminaire Performance

390 – 1560 lm
7 – 28 W
55 lm/W/M

Beam Options



Color Temperature

3000 K

Controller

Remote

Input Options

24Vdc

Accessories



Input Cable



Pre-wired Cable





Mounting Clip



CV Driver

	Product Code	Luminaire Wattage	Beam	CCT	Luminaire Lumen	Efficacy	Controller	Ordering Code
							REMOTE	
LuxBeat	OD-8101							
		7 W/M	120°	3000 K 4000 K	680 lm/M 700 lm/M	97 lm/W/M 100 lm/W/M	• •	8101-0-2-467-00 8101-0-2-468-00
		14 W/M	120°	3000 K 4000 K	1930 lm/M 2030 lm/M	137 lm/W/M 145 lm/W/M	• •	8101-0-2-409-00 8101-0-2-410-00
LuxBeat XL	OD-8111							
		9 W	30°	3000 K	980 lm	108 lm/W/M	•	8111-C-2-269-00
		9 W	120°	3000 K RGBW	440 lm 210 lm	48 lm/W/M 23 lm/W	• •	8111-0-2-269-00 8111-0-2-399-00
	OD-8112							
		18 W	30°	3000 K	1960 lm	108 lm/W/M	•	8112-C-2-269-00
		18 W	120°	3000 K RGBW	880 lm 430 lm	48 lm/W/M 23 lm/W	• •	8112-0-2-269-00 8112-0-2-399-00
LuxBeat Underwater	OD-8113							
		36 W	30°	3000 K	3920 lm	108 lm/W/M	•	8113-C-2-269-00
		36 W	120°	3000 K RGBW	1760 lm 860 lm	48 lm/W/M 23 lm/W	• •	8113-0-2-269-00 8113-0-2-399-00
	OD-8114							
		7 W	120°	3000 K	390 lm	55 lm/W/M	•	8114-0-2-269-00
	OD-8115							
		14 W	120°	3000 K	780 lm	55 lm/W/M	•	8115-0-2-269-00
	OD-8116							
		28 W	120°	3000 K	1560 lm	55 lm/W/M	•	8116-0-2-269-00

*Please contact sales team for special request.

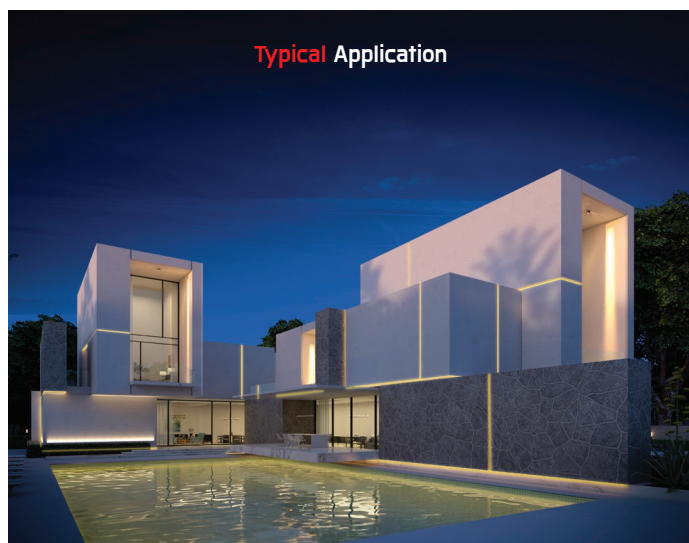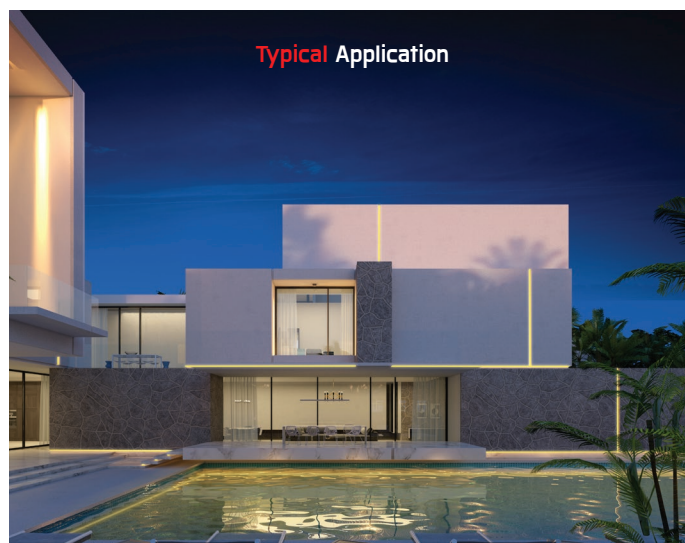




+



=

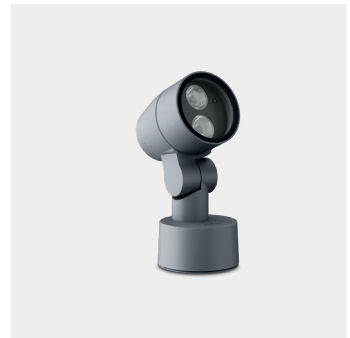

■ MODULAR
SOLUTIONS

ALPHA


• MODULAR SOLUTIONS




Micro ALPHA Round

Top – Mount Solutions

Spike Solutions



OR




OR



OR



+




5914
Micro ALPHA Round
Snoot – CV

5915
Micro ALPHA
Round Snoot – CC

5927
Micro ALPHA
Round – CV

5928
Micro ALPHA
Round – CC

AUN-ESP-0003-XX
Earth spike,
L= 900mm,
Aluminum



Pole – Attached Solutions



OR



OR



OR



+



OR




AUN-ESP-0006-XX
Earth spike, L= 900mm,
Aluminum, single side
luminaire mounting

AUN-ESP-0007-XX
Earth spike, L= 900mm,
Aluminum, double sided
luminaire mounting



OR



Mini ALPHA Round

Ground – Mount Solutions



OR




+



5972
Mini ALPHA
Round – ID

5973
Mini ALPHA
Round – ID

AUN-MOT-0052-XX
Mounting base,
Rotateable




Arm – Mount Solutions



OR



+



5972
Mini ALPHA
Round – ID

5973
Mini ALPHA
Round – ID

AUN-MOT-0053-XX
Outrigger arm,
L= 740mm



• MODULAR SOLUTIONS



Mini ALPHA Round

Top – Mount Solutions

Spike Solutions




OR



+



OR




5972
Mini ALPHA
Round – ID


5973
Mini ALPHA
Round – ID

AUN-ESP-0021-XX
Earth spike,
L= 900mm,
Aluminum

AUN-ESP-0022-XX
Earth spike,
L= 1390-1760mm,
Aluminum, length
Adjustable



OR



Short pole Solutions



OR



+



+




5972
Mini ALPHA
Round – ID

5973
Mini ALPHA
Round – ID

AUN-POL-0188-XX
Cylindrical
Aluminum pole,
Ø105mm,
H= 522mm


AUN-ACB-0014-00
Anchor bolt kit,
bollard



Pole – Attached Solutions



OR



+



+



+



OR



5972
Mini ALPHA
Round – ID


5973
Mini ALPHA
Round – ID

AUN-MOT-0054-XX
Pole mount
adaptor,
Rectangular pole

Aluminum Pole /
Steel Pole

AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole



OR



+



+



+



OR



5972
Mini ALPHA
Round – ID

5973
Mini ALPHA
Round – ID

AUN-MOT-0055-XX
Pole mount adaptor,
pole Ø60mm


AUN-MOT-0056-XX
Pole mount adaptor,
pole Ø76mm

AUN-MOT-0057-XX
Pole mount adaptor,
pole Ø102-105mm

Aluminum Pole /
Steel Pole

AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole



• MODULAR SOLUTIONS



Mini ALPHA Round

Pole Clamp – Mount Solutions



5972
Mini ALPHA
Round – ID

OR



5973
Mini ALPHA
Round – ID

+



AUN-MOT-0052-XX
Mounting base,
Rotateable

+



AUN-CLP-0004-XX
Pole clamp,
pole Ø102-105mm

OR



AUN-CLP-0006-XX
Pole clamp,
pole Ø60-76mm

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR




AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.



5972
Mini ALPHA
Round – ID

OR




5973
Mini ALPHA
Round – ID

+



AUN-MOT-0052-XX
Mounting base,
Rotateable

+



AUN-MOT-0013-XX
Pole mounting
arm, for
1-3 projector

+



AUN-CLP-0008-XX
Pole clamp,
pole Ø102-105mm,
for wall or pole
mounting arm

OR



AUN-CLP-0009-XX
Pole clamp,
pole Ø60-76mm,
for wall or pole
mounting arm

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.



5972
Mini ALPHA
Round – ID

OR



5973
Mini ALPHA
Round – ID

+



AUN-CLP-0052-XX
Pole clamp,
pole Ø60-76mm,
single side
luminaire mounting

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.



5972
Mini ALPHA
Round – ID

OR



5973
Mini ALPHA
Round – ID

+



AUN-CLP-0053-XX
Pole clamp,
pole Ø60-76mm,
double sided
luminaire mounting

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.





Mini ALPHA Round / Mini ALPHA Square

Pole Clamp – Mount Solutions

5972
Mini ALPHA
Round – ID

OR

5973
Mini ALPHA
Round – ID

+

AUN-CLP-0054-XX
Pole clamp,
pole Ø102–105mm,
single side
luminaire mounting

+

Aluminum Pole /
Steel Pole

+

AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR

AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.5972
Mini ALPHA
Round – ID

OR

5973
Mini ALPHA
Round – ID

+

AUN-CLP-0055-XX
Pole clamp,
pole Ø102–105mm,
double sided
luminaire mounting

+

Aluminum Pole /
Steel Pole

+

AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR

AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.5921
Mini ALPHA
Round – CC

OR

5922
Mini ALPHA Round
Mini ALPHA Round – CVDA

OR

5970
Mini ALPHA
Round – ID

OR

5964
Mini ALPHA
Round Snoot – CC

OR

5965
Mini ALPHA Round Snoot
– CVDA5960
Mini ALPHA
Square – ID

OR

5943
Mini ALPHA
Square – CC

OR

5945
Mini ALPHA Square

+

Aluminum Pole /
Steel Pole

+

AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR

AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.AUN-CLP-0004-XX
Pole clamp,
pole Ø102–105mm

OR

AUN-CLP-0006-XX
Pole clamp,
Ø60–76mm

+

AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR

AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.

ALPHA

• MODULAR SOLUTIONS



Mini ALPHA Round / Mini ALPHA Square

Pole Clamp – Mount Solutions



OR



OR



OR



OR



5921
Mini ALPHA
Round – CC

5922
Mini ALPHA Round
Mini ALPHA Round – CVDA

5970
Mini ALPHA
Round – ID

5964
Mini ALPHA
Round Snoot – CC

5965
Mini ALPHA Round Snoot
– CVDA



OR



OR



+

5960
Mini ALPHA
Square – ID

5943
Mini ALPHA
Square – CC

5945
Mini ALPHA Square



+



OR



+



+



OR



AUN-MOT-0013-XX
Pole mounting
arm, for
1-3 projector


AUN-CLP-0008-XX
Pole clamp,
pole Ø102-105mm,
for wall or pole
mounting arm

AUN-CLP-0009-XX
Pole clamp,
pole Ø60-76mm,
for wall or pole
mounting arm

Aluminum Pole /
Steel Pole

AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.



Medium ALPHA Round

Ground – Mount Solutions



+




OR




5962
Medium ALPHA Round – ID

AUN-MOT-0021-XX
Mounting base,
Rotateable
[On/Off]

AUN-MOT-0022-XX
Mounting base,
Rotateable
[1-10V or DALI]



OR



Arm – Mount Solutions



+



5962
Medium ALPHA Round – ID

AUN-MOT-0019-XX
Outrigger arm, L= 740mm



• MODULAR SOLUTIONS



Medium ALPHA Round

Top – Mount Solutions


Spike Solutions



+




OR




5962
Medium ALPHA Round – ID

AUN-ESP-0009-XX
Earth spike,
L= 900mm,
Aluminum

AUN-ESP-0024-XX
Earth spike,
L= 1390–1760mm,
Aluminum, length
adjustable



OR



Short pole Solutions



+




+



5962
Medium ALPHA Round – ID

AUN-POL-0044-XX
Cylindrical
Aluminum pole,
Ø105mm,
H= 522mm


AUN-ACB-0014-00
Anchor Bolt Kit,
Bollard



Pole – Attached Solutions



+



+



+



OR



5962
Medium ALPHA Round – ID

AUN-MOT-0039-XX
Pole mount
adaptor,
Rectangular pole


Aluminum Pole /
Steel Pole

AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole



+



+



+



OR



5962
Medium ALPHA Round – ID

AUN-MOT-0033-XX
Pole mount adaptor,
pole Ø60mm


AUN-MOT-0035-XX
Pole mount adaptor,
pole Ø76mm

AUN-MOT-0037-XX
Pole mount adaptor,
pole Ø102–105mm

Aluminum Pole /
Steel Pole

AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.



• MODULAR SOLUTIONS



Medium ALPHA Round

Pole Clamp – Mount Solutions



+



OR



+



OR



+


5962
Medium ALPHA Round – ID

AUN-MOT-0021-XX
Mounting base,
Rotateable
[On/Off]

AUN-MOT-0022-XX
Mounting base,
Rotateable
[1-10V or DALI]

AUN-CLP-0008-XX
Pole clamp,
pole Ø102-105mm,
for wall or pole
mounting arm

AUN-CLP-0009-XX
Pole clamp,
pole Ø60-76mm,
for wall or pole
mounting arm



+



+



OR



AUN-MOT-0013-XX
Pole mounting
arm, for
1-3 projector

Aluminum Pole /
Steel Pole

AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.



+



OR



+



OR



+

5962
Medium ALPHA Round – ID

AUN-MOT-0021-XX
Mounting base,
Rotateable
[On/Off]

AUN-MOT-0022-XX
Mounting base,
Rotateable
[1-10V or DALI]

AUN-CLP-0004-XX
Pole clamp,
pole Ø102-105mm

AUN-CLP-0006-XX
Pole clamp,
Ø60-76mm



+



OR



Aluminum Pole /
Steel Pole

AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.



+



+



+



OR



5962
Medium ALPHA Round – ID

AUN-CLP-0041-XX
Pole clamp, pole
Ø60-76mm,
single side
luminaire mounting

Aluminum Pole /
Steel Pole

AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.





Medium ALPHA Round

Pole Clamp – Mount Solutions



5962
Medium ALPHA Round – ID

+



AUN-CLP-0045-XX
Pole clamp, pole
Ø60-76mm,
double sided
luminaire mounting

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.



5962
Medium ALPHA Round – ID

+



AUN-CLP-0043-XX
Pole clamp,
pole Ø102-105mm,
single side
luminaire mounting

+



Aluminum Pole /
Steel Pole

+




AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.



5962
Medium ALPHA Round – ID

+



AUN-CLP-0047-XX
Pole clamp,
pole Ø102-105mm,
double sided
luminaire mounting

+



Aluminum Pole /
Steel Pole

+




AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.



5924
Medium ALPHA Round – CC

OR



5925
Medium ALPHA Round
Medium ALPHA Round – CC

OR



5967
Medium ALPHA
Round Snoot – CC

OR



5968
Medium ALPHA
Round Snoot

+




AUN-CLP-0008-XX
Pole clamp,
pole Ø102-105mm,
for wall or pole
mounting arm

OR



AUN-CLP-0009-XX
Pole clamp,
pole Ø60-76mm,
for wall or pole
mounting arm

+



AUN-MOT-0013-XX
Pole mounting
arm, for
1-3 projector

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.

ALPHA / ANDROMEDA

• MODULAR SOLUTIONS



Medium ALPHA Round / Medium ALPHA Square

Pole Clamp – Mount Solutions



5944
Medium ALPHA
Square

+




AUN-CLP-0008-XX
Pole clamp,
pole Ø102-105mm,
for wall or pole
mounting arm

OR



AUN-CLP-0009-XX
Pole clamp,
pole Ø60-76mm,
for wall or pole
mounting arm

+



AUN-MOT-0013-XX
Pole mounting
arm, for
1-3 projector

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.




5924
Medium ALPHA Round – CC

OR



5925
Medium ALPHA Round
Medium ALPHA Round – CC

OR




5967
Medium ALPHA
Round Snoot – CC

OR



5968
Medium ALPHA
Round Snoot

OR



5944
Medium ALPHA
Square

+



AUN-CLP-0004-XX
Pole clamp,
pole Ø102-105mm

OR



AUN-CLP-0006-XX
Pole clamp,
Ø60-76mm

+



Aluminum Pole /
Steel Pole

+




AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.



Mini ANDROMEDA

Top – Mount Solutions



7297
Mini ANDROMEDA

OR



7298
Mini ANDROMEDA
– DS

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor bolt kit,
pole Ø102mm
and 151x102mm,
galvanized steel pole

OR



AUN-ACB-0009-00
Anchor bolt kit, pole
Ø114 and 114/140,
galvanized steel pole





ATHLON

Top – Mount Solutions



7256
ATHLON

OR



7257
ATHLON Optic

OR



7258
ATHLON – DS

OR



7259
ATHLON Optic – DS

+



OR



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor bolt kit,
pole Ø102mm
and 151x102mm,
galvanized steel pole



BLAZE

Top – Mount Solutions



7223
BLAZE

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor bolt kit,
pole Ø102mm
and 151x102mm,
galvanized steel pole



CANNON

Ground – Mount Solutions



2020
CANNON 280

OR




2021
CANNON 360

+



AUN-MOT-0003-XX
Mounting base,
Rotatable



• MODULAR SOLUTIONS



CANNON

Top – Mount Solutions



2020
CANNON 280

OR




2021
CANNON 360

+



AUN-MOT-0001-XX
Pole mount adaptor,
spigot Ø76mm

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor bolt kit,
pole Ø102mm
and 151x102mm,
galvanized steel pole

OR



AUN-ACB-0009-00
Anchor bolt kit, pole
Ø114 and 114/140,
galvanized steel pole

Pole Clamp – Mount Solutions



2020
CANNON 280

OR



2021
CANNON 360

+



AUN-CLP-0001-XX
Pole clamp,
pole Ø114mm

+



Steel Pole

+



AUN-ACB-0008-00
Anchor bolt kit,
pole Ø102mm
and 151x102mm,
galvanized steel pole

OR



AUN-ACB-0009-00
Anchor bolt kit, pole
Ø114 and 114/140,
galvanized steel pole




2020
CANNON 280

OR



2021
CANNON 360

+




AUN-MOT-0002-XX
Wall or pole mounting
arm, pole Ø114mm

OR




AUN-MOT-0004-XX
Wall or pole mounting
arm, pole Ø114mm,
double sided

+



OR



Steel Pole

+



AUN-ACB-0008-00
Anchor bolt kit,
pole Ø102mm
and 151x102mm,
galvanized steel pole

OR



AUN-ACB-0009-00
Anchor bolt kit, pole
Ø114 and 114/140,
galvanized steel pole



Ground – Mount Solutions



OR



+



OR




5992
Medium CETUS
without Base


5994
Mega CETUS
Without Base

AUN-MOT-0021-XX
Mounting base,
Rotateable
(On/Off)

AUN-MOT-0022-XX
Mounting base,
Rotateable
[1-10V or DALI]



OR




Arm – Mount Solutions



OR



+



5992
Medium CETUS
without Base

5994
Mega CETUS
Without Base

AUN-MOT-0018-XX
AUN-MOT-0019-XX
Outrigger arm,
L= 740mm



Top – Mount Solutions

Spike Solutions




OR



+



OR




5992
Medium CETUS
without Base


5994
Mega CETUS
Without Base

AUN-ESP-0008-XX
AUN-ESP-0009-XX
Earth spike,
L= 900mm,
Aluminum

AUN-ESP-0023-XX
AUN-ESP-0024-XX
Earth spike,
L= 1390-1760mm,
Aluminum, length
adjustable



OR



Short pole Solutions



OR



+



+




5992
Medium CETUS
without Base


5994
Mega CETUS
Without Base

AUN-POL-0043-XX
AUN-POL-0044-XX
Cylindrical Aluminum
pole, Ø105mm,
H= 522mm

AUN-ACB-0014-00
Anchor Bolt Kit,
Bollard



Pole – Attached Solutions



OR



+



+



+



OR



5992
Medium CETUS
without Base


5994
Mega CETUS
Without Base

AUN-MOT-0038-XX
AUN-MOT-0039-XX
Pole mount adaptor,
Rectangular pole

Aluminum Pole /
Steel Pole

AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole



• MODULAR SOLUTIONS



Pole – Attached Solutions



5992
Medium CETUS
without Base

OR



5994
Mega CETUS
Without Base

+



AUN-MOT-0032-XX
AUN-MOT-0033-XX
Pole mount adaptor,
pole Ø60mm

AUN-MOT-0034-XX
AUN-MOT-0035-XX
Pole mount adaptor,
pole Ø76mm

AUN-MOT-0036-XX
AUN-MOT-0037-XX
Pole mount adaptor,
pole Ø102-105mm

+



Aluminum Pole /
Steel Pole

+




AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.



Pole Clamp – Mount Solutions



5992
Medium CETUS
without Base

OR



5994
Mega CETUS
Without Base

+



AUN-MOT-0021-XX
Mounting base,
Rotateable
(On/Off)

OR



AUN-MOT-0022-XX
Mounting base,
Rotateable
(1-10V or DALI)

+




AUN-CLP-0008-XX
Pole clamp,
pole Ø102-105mm,
for wall or pole
mounting arm

OR



AUN-CLP-0009-XX
Pole clamp,
pole Ø60-76mm,
for wall or pole
mounting arm

+



AUN-MOT-0013-XX
Pole mounting
arm, for
1-3 projector

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.



5992
Medium CETUS
without Base

OR



5994
Mega CETUS
Without Base

+



AUN-CLP-0040-XX
AUN-CLP-0041-XX
Pole clamp, pole
Ø60-76mm,
single side
luminaire mounting

+



Aluminum Pole /
Steel Pole

+




AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.





Pole Clamp – Mount Solutions



5992
Medium CETUS
without Base

OR



5994
Mega CETUS
Without Base

+



AUN-CLP-0044-XX
AUN-CLP-0045-XX
Pole clamp, pole
Ø60-76mm,
double sided
luminaire mounting

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.



5992
Medium CETUS
without Base

OR



5994
Mega CETUS
Without Base

+



AUN-CLP-0042-XX
AUN-CLP-0043-XX
Pole clamp,
pole Ø102-105mm,
single side
luminaire mounting

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.



5992
Medium CETUS
without Base

OR



5994
Mega CETUS
Without Base

+



AUN-CLP-0046-XX
AUN-CLP-0047-XX
Pole clamp,
pole Ø102-105mm,
double sided
luminaire mounting

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.



Top – Mount Solutions



7221
HELIOS

OR



7224
HELIOS

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor bolt kit,
pole Ø102mm
and 151x102mm,
galvanized steel pole




CAP / MARANELLO

• MODULAR SOLUTIONS


CAP

Top – Mount Solutions

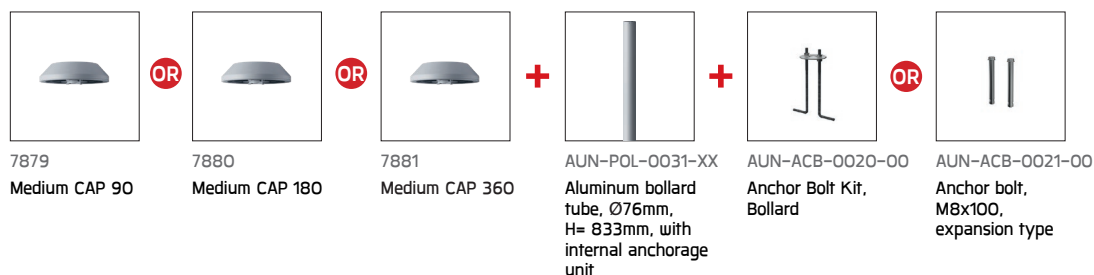

MARANELLO



Top – Mount Solutions

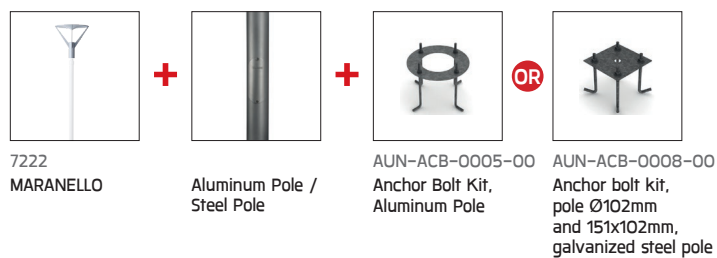


• MODULAR SOLUTIONS

KORNER


Wall – Mount Solutions

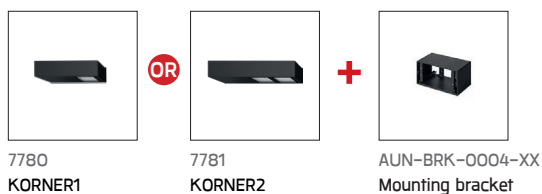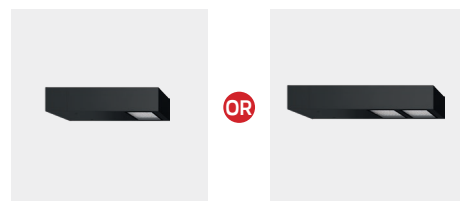

Pole Clamp – Mount Solutions

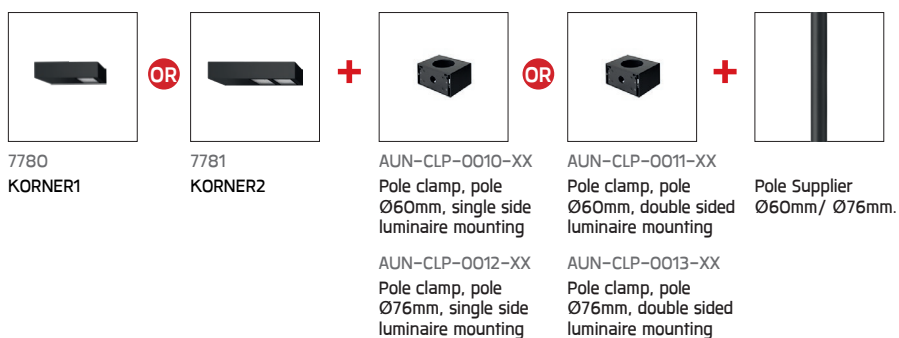

Pole – Attached Solutions

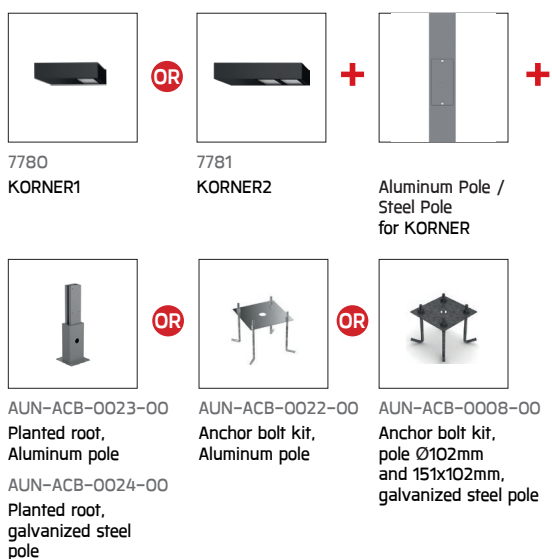

• MODULAR SOLUTIONS



KRONOS

Ground – Mount Solution



2270
KRONOS

OR




2271
KRONOS

+



AUN-MOT-0003-XX
Mounting base,
Rotateable



Top – Mount Solutions



2270
KRONOS

OR




2271
KRONOS

+



AUN-MOT-0001-XX
Pole mount adaptor,
spigot Ø76mm

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor bolt kit,
pole Ø102mm
and 151x102mm,
galvanized steel pole

OR



AUN-ACB-0009-00
Anchor bolt kit, pole
Ø114 and 114/140,
galvanized steel pole

Pole Clamp – Mount Solutions



2270
KRONOS

OR



2271
KRONOS

+



AUN-CLP-0002-XX
Pole clamp,
pole Ø102-105mm

OR



AUN-CLP-0003-XX
Pole clamp,
pole Ø114mm

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor bolt kit,
pole Ø102mm
and 151x102mm,
galvanized steel pole

OR



AUN-ACB-0009-00
Anchor bolt kit, pole
Ø114 and 114/140,
galvanized steel pole



KRONOS

Pole Clamp – Mount Solutions

2270
KRONOS

OR

2271
KRONOS


+

AUN-MOT-0002-XX
Wall or pole mounting
arm, pole Ø114mm

OR

AUN-MOT-0004-XX
Wall or pole mounting
arm, pole Ø114mm,
double sided

+



OR

Aluminum Pole /
Steel Pole

+

AUN-ACB-0005-00
Anchor Bolt Kit for
Aluminum Pole

OR

AUN-ACB-0008-00
Anchor bolt kit,
pole Ø102mm
and 151x102mm,
galvanized steel pole

OR

AUN-ACB-0009-00
Anchor bolt kit, pole
Ø114 and 114/140,
galvanized steel pole

Top – Mount Solutions

7770
KRONOS

OR

7771
KRONOS

OR

7772
KRONOS

OR

7773
KRONOS – DS

+



OR



Steel Pole

+

AUN-ACB-0009-00
Anchor bolt kit, pole
Ø114 and 114/140,
galvanized steel pole

• MODULAR SOLUTIONS



Micro KUBIK

Top – Mount Solutions


Spike Solution



OR



+



5948
Micro KUBIK – CV

5949
Micro KUBIK – CC

AUN-ESP-0004-XX
Earth spike,
L= 900mm, Aluminum




Pole – Attached Solutions



OR



+



OR




5948
Micro KUBIK – CV

5949
Micro KUBIK – CC

AUN-ESP-0010-XX
Earth spike,
L= 900mm,
Aluminum,
single side
luminaire mounting

AUN-ESP-0011-XX
Earth spike,
L= 900mm,
Aluminum,
double sided
luminaire mounting



OR



KUBIK

Pole Clamp – Mount Solutions




OR



+




+



OR



OR



5942
KUBIK


5942
KUBIK – CC
KUBIC – CC [DMX]

AUN-CLP-0005-XX
Pole clamp, pole
Ø102-105mm

AUN-MOT-0005-XX
Wall array,
for 2 projector

AUN-MOT-0006-XX
Wall array,
for 4 projector

AUN-MOT-0007-XX
Wall array,
for 6 projector




OR




+




+



OR



OR



5942
KUBIK

5942
KUBIK – CC
KUBIC – CC [DMX]

AUN-CLP-0005-XX
Pole clamp, pole
Ø102-105mm

AUN-POL-0025-XX
Pole array
for 2 projector

AUN-POL-0026-XX
Pole array
for 4 projector

AUN-POL-0027-XX
Pole array
for 6 projector



+




OR



Aluminum Pole /
Steel Pole

AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.





• MODULAR SOLUTIONS


8111/ 8112/ 8113
LuxBeat XL

OR


8111/ 8112/ 8113
LuxBeat XL


+


AUN-MOT-0014-XX
AUN-MOT-0015-XX
AUN-MOT-0016-XX
Surface mount
profile

8111/ 8112/ 8113
LuxBeat XL



OR


8111/ 8112/ 8113
LuxBeat XL

+


AUN-MOT-0014-XX
AUN-MOT-0015-XX
AUN-MOT-0016-XX
Surface mount
profile


+


AUN-BRK-0007-XX
Mounting bracket,
adjustable

8111/ 8112/ 8113
LuxBeat XL

OR


8111/ 8112/ 8113
LuxBeat XL

+


AUN-MOT-0014-XX
AUN-MOT-0015-XX
AUN-MOT-0016-XX
Surface mount
profile

+


ATR-MOT-0001-00
Suspension kit, with
mounting loop

OR




ATR-MOT-0002-00
Suspension kit, with
mounting post

8111/ 8112/ 8113
LuxBeat XL

OR


8111/ 8112/ 8113
LuxBeat XL

+


AUN-RCH-0013-XX
AUN-RCH-0014-XX
AUN-RCH-0015-XX
Recessed ceiling
mounting profile

8111/ 8112/ 8113
LuxBeat XL


OR


8111/ 8112/ 8113
LuxBeat XL

+


AUN-RCH-0026-XX
AUN-RCH-0027-XX
AUN-RCH-0028-XX
Plasterboard wall
mounting profile

OR


AUN-RCH-0029-XX
AUN-RCH-0030-XX
AUN-RCH-0031-XX
Wall niche mounting
profile


• MODULAR SOLUTIONS



NEOS

Wall – Mount Solutions



2356
NEOS

+



AUN-MOT-0008-XX
Pole mount
adaptor,
Rectangular pole

OR



AUN-MOT-0009-XX
Pole mount
adaptor, pole
Ø60mm

OR



AUN-MOT-0010-XX
Pole mount
adaptor, pole
Ø76mm

OR



AUN-MOT-0011-XX
Pole mount
adaptor, pole
Ø102-105mm



2356
NEOS

+



AUN-RCH-0012-XX
Mounting base,
Rotateable



2356
NEOS

+



AUN-MOT-0020-XX
Turnable round base
for Ground mount or
Wall mount



2356
NEOS

+



AUN-MOT-0008-XX
Pole mount
adaptor for
rectangular pole.

+



AUN-BRK-0002-XX
Corner Bracket

OR



AUN-MOT-0012-XX
Wall spacer



Top – Mount Solutions



7246
NEOS

OR



7247
NEOS

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor bolt kit,
pole Ø102mm
and 151x102mm,
galvanized steel pole


OR



AUN-ACB-0009-00
Anchor bolt kit, pole
Ø114 and 114/140,
galvanized steel pole



OR





Neo EQUINOX

Pole Clamp – Mount Solutions



7715
Neo EQUINOX
Clamp

OR



7716
Neo EQUINOX
Clamp – DS

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR




AUN-ACB-0008-00
Anchor bolt kit,
pole Ø102mm
and 151x102mm,
galvanized steel pole



OR



Top – Mount Solutions



7717
Neo EQUINOX

OR



7718
Neo EQUINOX – DS

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor bolt kit,
pole Ø102mm
and 151x102mm,
galvanized steel pole

OR



AUN-ACB-0009-00
Anchor bolt kit, pole
Ø114 and 114/140,
galvanized steel pole



OR



NeoPLACE

Top – Mount Solutions



7220
NeoPLACE

OR



7760
NeoPLACE Direct

+




Aluminum Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole



7761
NeoPLACE
Direct – DS

+



Aluminum Pole /
Steel Pole

+




AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor bolt kit,
pole Ø102mm
and 151x102mm,
galvanized steel pole



• MODULAR SOLUTIONS

PRIMUS

Top – Mount Solutions



7719
PRIMUS Opal

OR



7720
PRIMUS

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor bolt kit,
pole Ø102mm
and 151x102mm,
galvanized steel pole

OR



AUN-ACB-0009-00
Anchor bolt kit, pole
Ø114 and 114/140,
galvanized steel pole



Small SIROCCO

Ground – Mount Solutions



2240
Small SIROCCO

OR



2241
Small SIROCCO

OR



2244
Small SIROCCO

+



AUN-MOT-0003-XX
Mounting base,
Rotateable



Top – Mount Solutions



2240
Small SIROCCO

OR



2241
Small SIROCCO

OR



2244
Small SIROCCO

+



AUN-MOT-0001-XX
Pole mount adaptor,
spigot Ø76mm

+



Steel Pole

+




AUN-ACB-0008-00
Anchor bolt kit,
pole Ø102mm
and 151x102mm,
galvanized steel pole

OR



AUN-ACB-0009-00
Anchor bolt kit, pole
Ø114 and 114/140,
galvanized steel pole





Small SIROCCO

Pole Clamp – Mount Solutions



2240
Small SIROCCO

OR



2241
Small SIROCCO

OR



2244
Small SIROCCO

+



AUN-CLP-0002-XX
Pole clamp,
pole Ø102-105mm

OR



AUN-CLP-0003-XX
Pole clamp,
pole Ø114mm

+



Steel Pole

+



AUN-ACB-0008-00
Anchor bolt kit,
pole Ø102mm
and 151x102mm,
galvanized steel pole

OR



AUN-ACB-0009-00
Anchor bolt kit, pole
Ø114 and 114/140,
galvanized steel pole



2240
Small SIROCCO

OR



2241
Small SIROCCO

OR



2244
Small SIROCCO

+



AUN-MOT-0002-XX
Wall or pole mounting
arm, pole Ø114mm

OR



AUN-MOT-0004-XX
Wall or pole mounting
arm, pole Ø114mm,
double sided

+



Steel Pole

+



AUN-ACB-0008-00
Anchor bolt kit,
pole Ø102mm
and 151x102mm,
galvanized steel pole

OR



AUN-ACB-0009-00
Anchor bolt kit, pole
Ø114 and 114/140,
galvanized steel pole



OR



SIROCCO

Top – Mount Solutions



7240
Small SIROCCO

OR



7241
Small SIROCCO

OR



7242
Small SIROCCO

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor bolt kit,
pole Ø102mm
and 151x102mm,
galvanized steel pole

OR



AUN-ACB-0009-00
Anchor bolt kit,
pole Ø114 and
114/140, galvanized
steel pole



OR



• MODULAR SOLUTIONS



Mini SONIC

Pole Clamp – Mount Solutions



5931
Mini SONIC

+



AUN-CLP-0004-XX
Pole clamp,
pole Ø102-105mm

OR



AUN-CLP-0006-XX
Pole clamp,
pole Ø60-76mm

+



Aluminum Pole /
Steel Pole

+




AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.



5931
Mini SONIC

+




AUN-CLP-0008-XX
Pole clamp,
pole Ø102-105mm, for wall
or pole mounting arm

OR



AUN-CLP-0009-XX
Pole clamp,
pole Ø60-76mm, for wall
or pole mounting arm

+



AUN-MOT-0013-XX
Pole mounting
arm, for
1-3 projector

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.



Medium SONIC

Pole Clamp – Mount Solutions



5933
Medium SONIC

+



AUN-CLP-0004-XX
Pole clamp,
pole Ø102-105mm

OR



AUN-CLP-0006-XX
Pole clamp,
pole Ø60-76mm

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.



5933
Medium SONIC

+



AUN-CLP-0008-XX
Pole clamp,
pole Ø102-105mm, for wall
or pole mounting arm

OR



AUN-CLP-0009-XX
Pole clamp,
pole Ø60-76mm, for wall
or pole mounting arm

+



AUN-MOT-0013-XX
Pole mounting
arm, for
1-3 projector

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.



Mega SONIC


Pole Clamp – Mount Solutions

5935
Mega SONIC


+

AUN-CLP-0004-XX
Pole clamp,
pole Ø102-105mm



+

AUN-MOT-0005-XX
Wall array,
for 2 projector

OR

AUN-MOT-0006-XX
Wall array,
for 4 projector


OR

AUN-MOT-0007-XX
Wall array,
for 6 projector5935
Mega SONIC


+

AUN-CLP-0004-XX
Pole clamp,
pole Ø102-105mm


+

AUN-POL-0025-XX
Pole array
for 2 projector

OR

AUN-POL-0026-XX
Pole array
for 4 projector

OR

AUN-POL-0027-XX
Pole array
for 6 projector

+

Aluminum Pole /
Steel Pole

+

AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR

AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.5935
Mega SONIC

+

AUN-CLP-0004-XX
Pole clamp,
pole Ø102-105mm

OR

AUN-CLP-0006-XX
Pole clamp,
Ø60-76mm

+

Aluminum Pole /
Steel Pole

+

AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR

AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.5935
Mega SONIC


+

AUN-CLP-0008-XX
Pole clamp,
pole Ø102-105mm,
for wall or pole
mounting arm

OR

AUN-CLP-0009-XX
Pole clamp,
pole Ø60-76mm,
for wall or pole
mounting arm

+

AUN-MOT-0013-XX
Pole mounting
arm, for
1-3 projector

+

Aluminum Pole /
Steel Pole

+

AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR

AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.

• MODULAR SOLUTIONS



SPACE

Ground – Mount Solutions



2040
Mini SPACE

OR




2041
Medium SPACE

+



AUN-MOT-0003-XX
Mounting base,
Rotatable



2040
Mini SPACE

OR




2041
Medium SPACE

+



AUN-POL-0030-XX
Cylindrical Aluminum
pole, Ø140mm,
H= 410mm,
use with projector



Top – Mount Solutions



2040
Mini SPACE

OR




2041
Medium SPACE

+



AUN-MOT-0001-XX
Pole mount adaptor,
spigot Ø76mm

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor bolt kit,
pole Ø102mm
and 151x102mm,
galvanized steel pole

OR



AUN-ACB-0009-00
Anchor bolt kit,
pole Ø114 and
114/140, galvanized
steel pole

Pole Clamp – Mount Solutions



2040
Mini SPACE

OR



2041
Medium SPACE

+



AUN-CLP-0001-XX
Pole clamp,
pole Ø114mm

+



Steel Pole

+




AUN-ACB-0008-00
Anchor bolt kit,
pole Ø102mm
and 151x102mm,
galvanized steel pole

OR



AUN-ACB-0009-00
Anchor bolt kit,
pole Ø114 and
114/140, galvanized
steel pole



• MODULAR SOLUTIONS



SPACE

Pole Clamp – Mount Solutions

2040
Mini SPACE

OR

2041
Medium SPACE

+

AUN-MOT-0002-XX
Wall or pole mounting
arm, pole Ø114mm

OR

AUN-MOT-0004-XX
Wall or pole mounting
arm, pole Ø114mm,
double sided

+



OR



Steel Pole

+

AUN-ACB-0008-00
Anchor bolt kit,
pole Ø102mm
and 151x102mm,
galvanized steel pole

OR

AUN-ACB-0009-00
Anchor bolt kit,
pole Ø114 and
114/140, galvanized
steel pole

SPOTT

Pole Clamp – Mount Solutions

5901
SPOTT

+

AUN-CLP-0004-XX
Pole clamp,
pole Ø102-105mm

OR

AUN-CLP-0006-XX
Pole clamp,
pole Ø60-76mm

+

Aluminum Pole /
Steel Pole

+

AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR

AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.5901
SPOTT


+

AUN-CLP-0008-XX
Pole clamp,
pole Ø102-105mm,
for wall or pole
mounting arm

OR

AUN-CLP-0009-XX
Pole clamp,
pole Ø60-76mm,
for wall or pole
mounting arm

+

AUN-MOT-0013-XX
Pole mounting
arm, for
1-3 projector

+

Aluminum Pole /
Steel Pole

+

AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR

AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.

STICK / TELESCOPE

• MODULAR SOLUTIONS



STICK

Top – Mount Solutions



7269
STICK Direct

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor bolt kit,
pole Ø102mm
and 151x102mm,
galvanized steel pole

OR



AUN-ACB-0009-00
Anchor bolt kit,
pole Ø114 and
114/140, galvanized
steel pole



TELESCOPE

Pole Clamp – Mount Solutions



5911
TELESCOPE

OR



5913
TELESCOPE – ID

+




AUN-CLP-0004-XX
Pole clamp,
pole Ø102-105mm

OR



AUN-CLP-0006-XX
Pole clamp,
Ø60-76mm

+



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.



5911
TELESCOPE

OR



5913
TELESCOPE – ID

+




AUN-CLP-0008-XX
Pole clamp,
pole Ø102-105mm,
for wall or pole
mounting arm

OR



AUN-CLP-0009-XX
Pole clamp,
pole Ø60-76mm,
for wall or pole
mounting arm

+



AUN-MOT-0013-XX
Pole mounting
arm, for
1-3 projector



Aluminum Pole /
Steel Pole

+



AUN-ACB-0005-00
Anchor Bolt Kit,
Aluminum Pole

OR



AUN-ACB-0008-00
Anchor Bolt Kit,
Galvanized Steel
Pole.


Pole – Attached Solutions

Spike Solution



5912
TELESCOPE
Spike – ID

+



AUN-ESP-0004-XX
Earth spike,
L= 900mm, Aluminum








DMX CONTROL OPTION

Sipalay – Philippines



DMX Overview

ID DMX

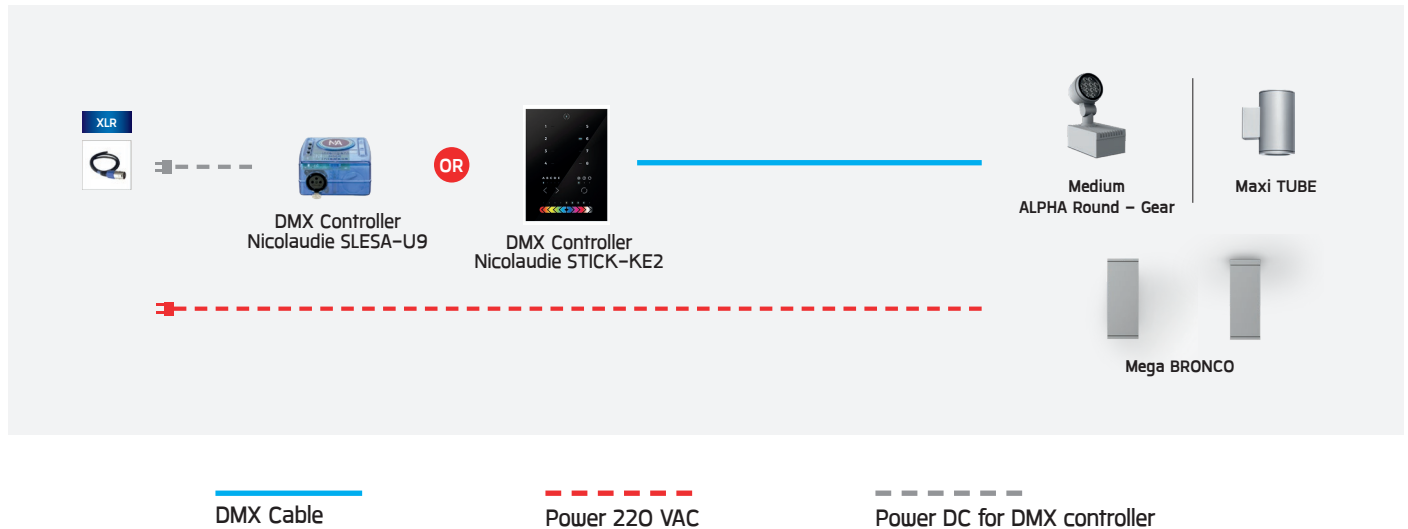

DMX Controller

	AUN-DMX-0023-00	DMX Controller Nicolaudio STICK-KE2
	AUN-DMX-0024-00	DMX Controller Nicolaudio SLESA-U9
	AUN-DMX-0025-00	DMX Controller Nicolaudio SLESA-U10
	AUN-DMX-0026-00	XLR 3 pin male connector, cable UNITRONIC Li2YCYv, L= 1000, DMX
	AUN-DMX-0027-00	Splitter, IP67 aluminum enclosure, DMX

Connector and Distribution Box

	AUN-CON-0022-00	IP67 connection device, cable diameter 4.5-11mm, DMX
	AUN-CON-0023-00	IP67 connection device, cable diameter 4.5-11mm, distribution block, DMX
	AUN-CON-0009-00	IP68 Water Tight Connecting Device, 3 Pole, Cable Diameter 5.0 - 9.5mm.
	AUN-CON-0010-00	IP68 Water Tight Connecting Device with Distribution block, 3 pole, 1 input, 2 outputs, Cable Diameter 5.0 - 9.5mm.


Cable

	ATR-CAB-0006-00	Cable UNITRONIC Li2YCYv (TP) length 2000mm. [DMX]
	AUN-CAB-0040-00	Cable HO7RN-F 2x1sqmm, L= 2000mm
	AUN-CAB-0039-00	Cable HO7RN-F 3x1sqmm, L= 2000mm

Small scale DMX System

Up to 32 RGBW luminaires / Up to 300m distance

Applicable for RGBW luminaire with **ID DMX**

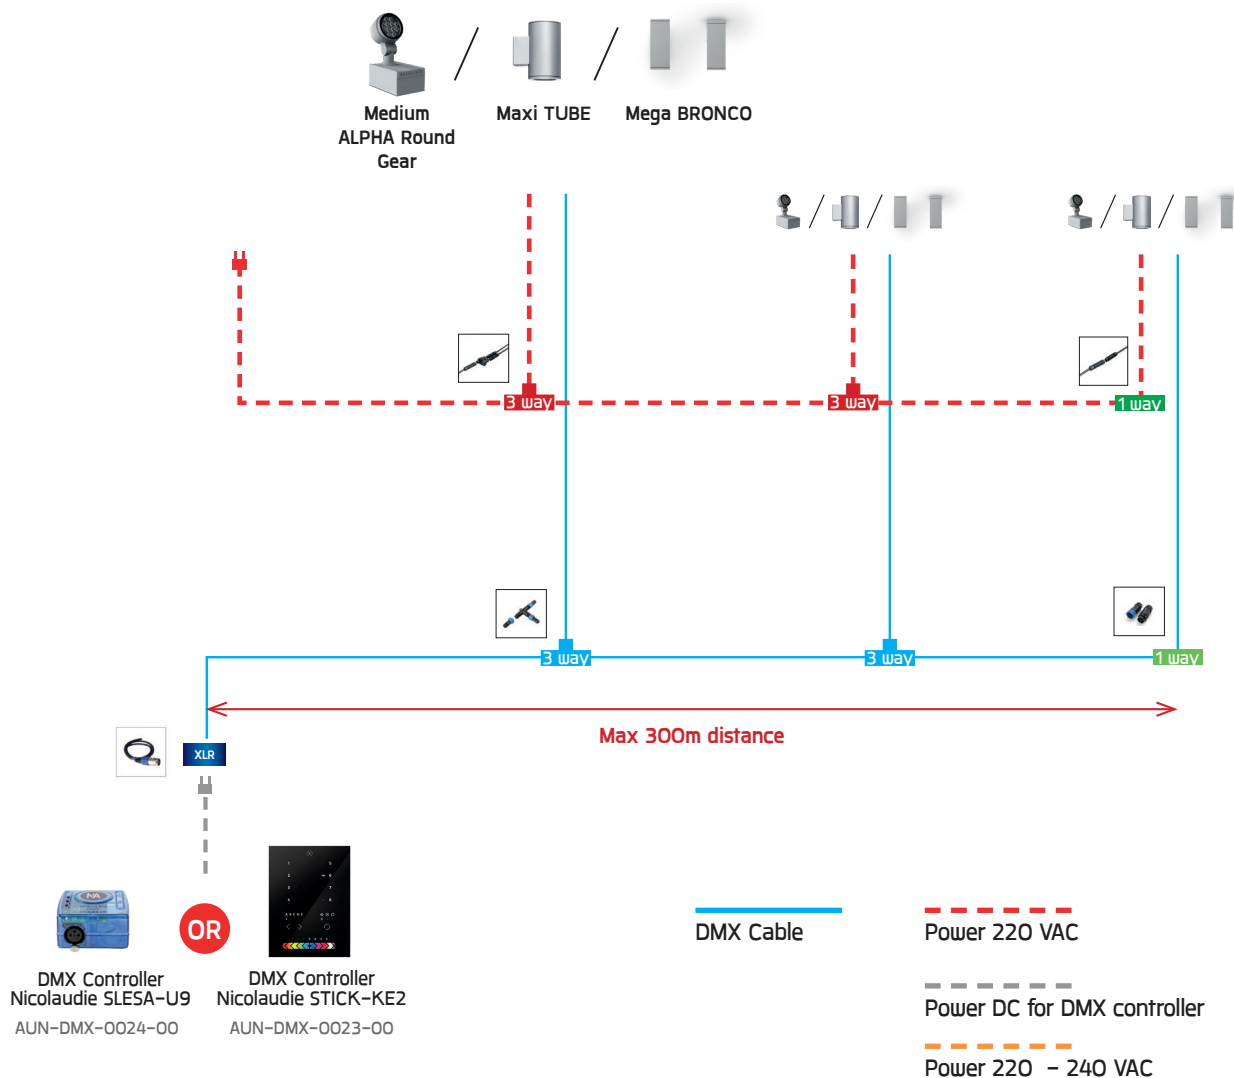

Accessories


-  DMX controller, Nicolaudie STICK-KE2
AUN-DMX-0023-00
-  DMX Controller Nicolaudie SLESA-U9
AUN-DMX-0024-00
-  DMX Controller Nicolaudie SLESA-U10
AUN-DMX-0025-00
-  Splitter, IP67 aluminium enclosure, DMX
AUN-DMX-0027-01

-  IP67 connection device, cable diameter 4.5-11mm, DMX
AUN-CON-0022-00
-  IP67 connection device, cable diameter 4.5-11mm, distribution block, DMX
AUN-CON-0023-00
-  IP68 connection device, cable diameter 5-9.5mm, On-Off
AUN-CON-0009-00
-  IP68 connection device 3 pole, cable diameter 5-9.5mm, with distribution block
AUN-CON-0010-00


Medium scale DMX System

Up to 256 RGBW luminaires / Up to 300m distance

Applicable for RGBW luminaire with ID DMX

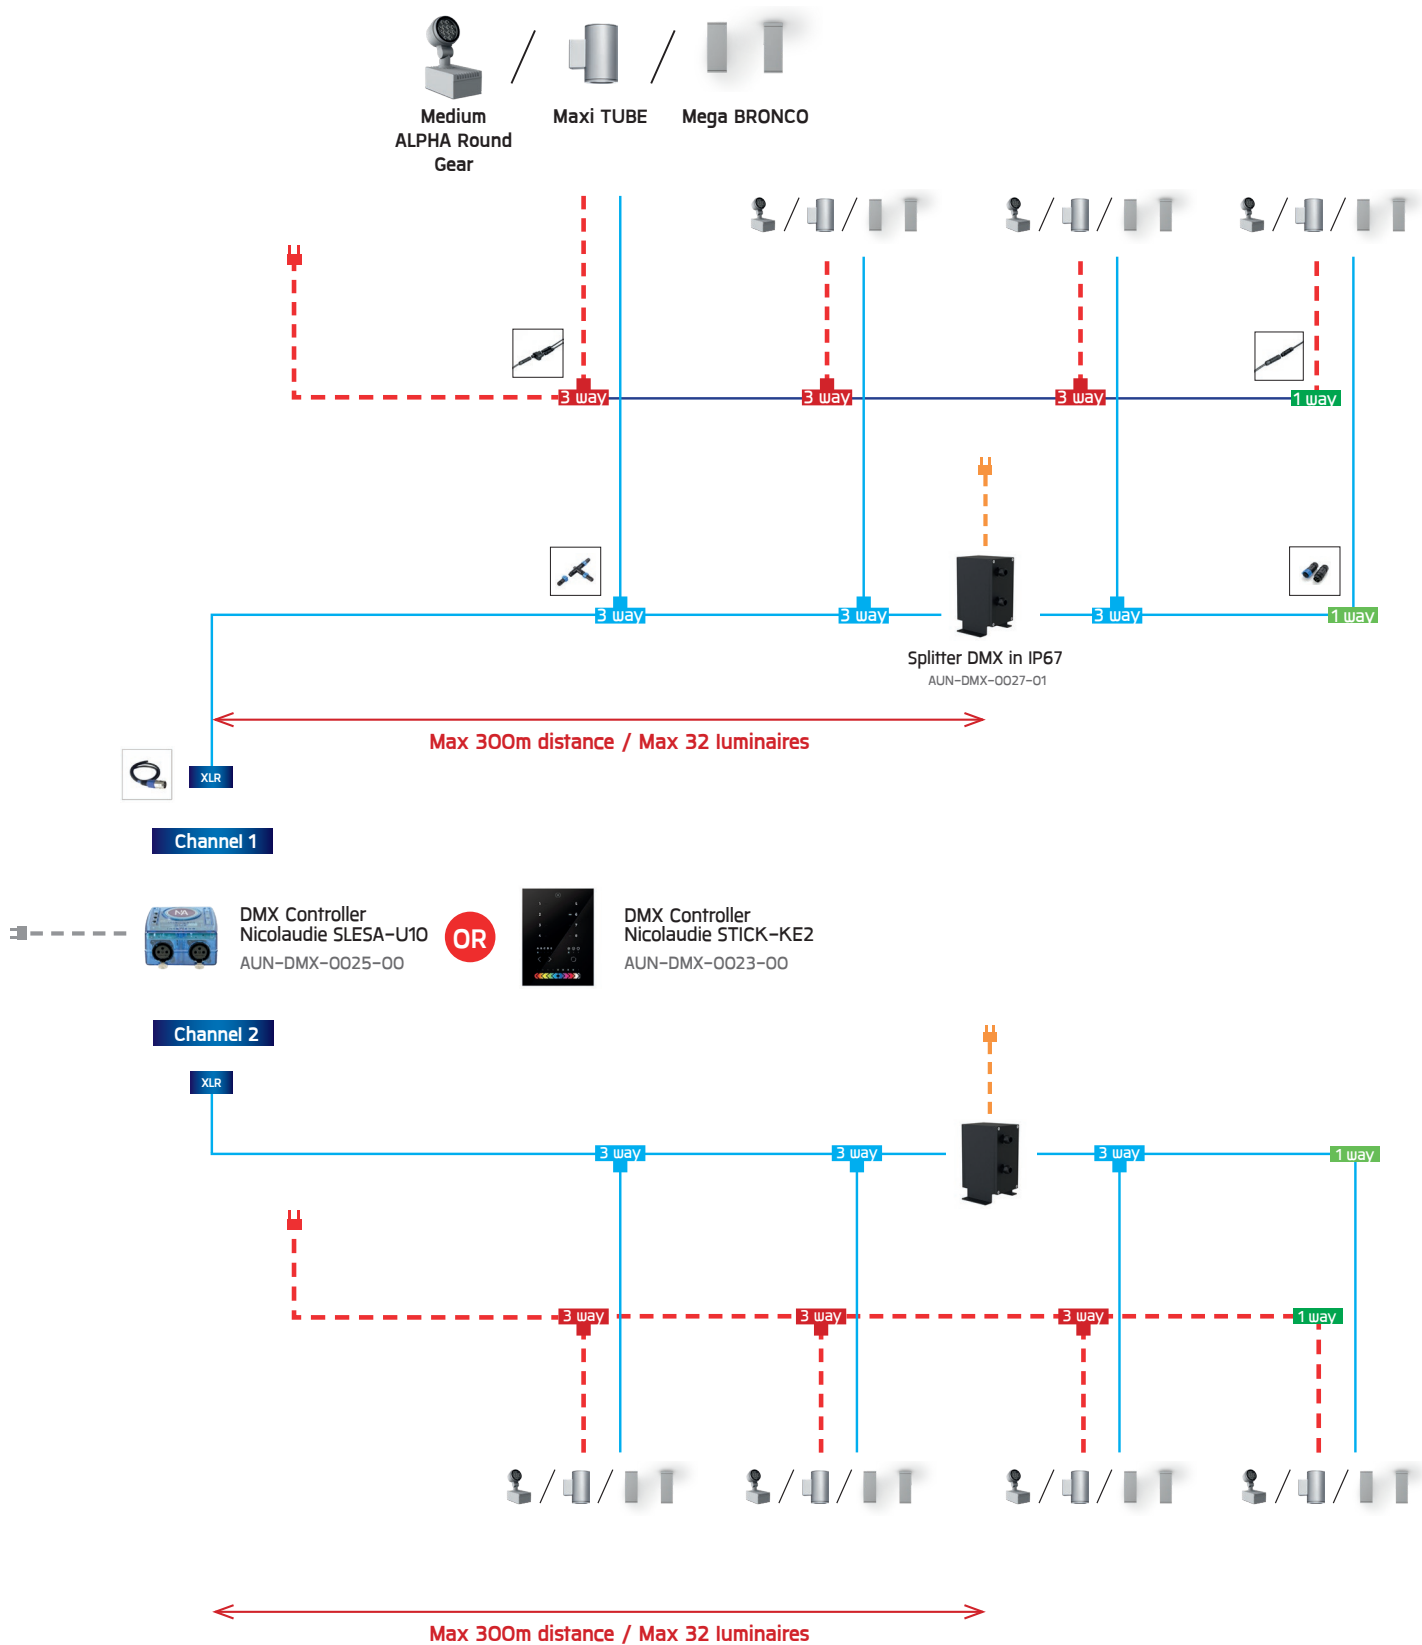




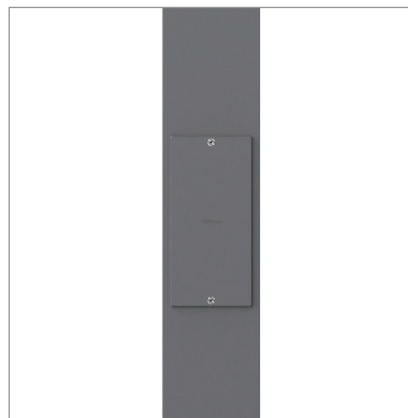

■ POLE AND ANCHOR BOLT KIT

POLE AND ANCHOR BOLT KIT

Aluminum Pole

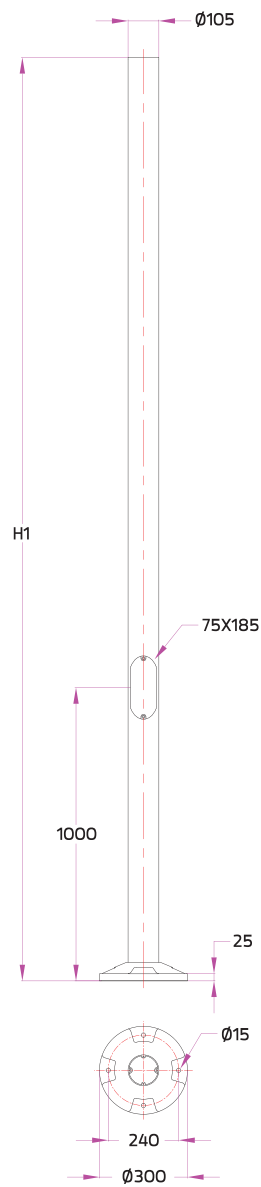

Cylindrical Aluminum Pole, Diameter 105 mm.


Type	Ordering Code	H1 [mm.]
16A Fuse + Prepared for dimming	AUN-POL-0001-XX	3000
	AUN-POL-0002-XX	3500
	AUN-POL-0003-XX	4000

Available Color



***Custom Colors is available as request.*

Anchor Bolt Kit for this pole
Ordering Code: AUN-ACB-0005-00

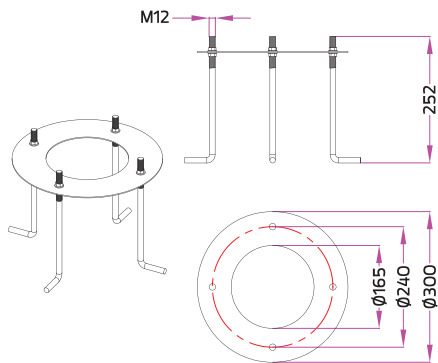

For Luminaires :



BLAZE



HELIOS




HELIOS



MARANELLO

POLE AND ANCHOR BOLT KIT


Aluminum Pole

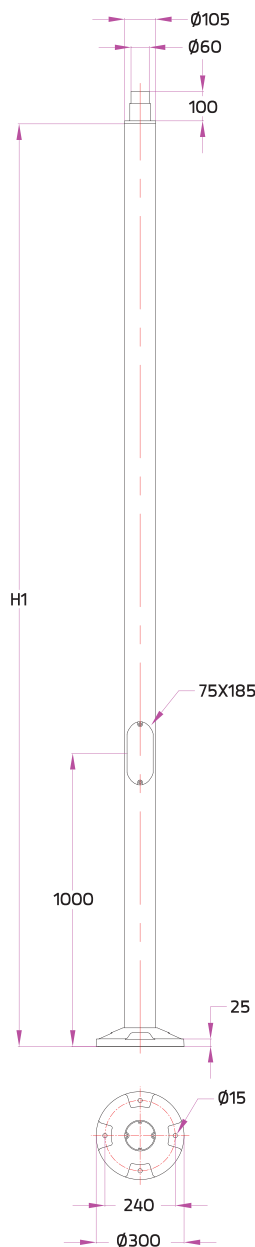

Cylindrical Aluminum Pole, Diameter 105mm, Spigot 60 mm.


Type	Ordering Code	H1 [mm.]
16A Fuse + Prepared for dimming	AUN-POL-0009-XX	3000
	AUN-POL-0010-XX	3500
	AUN-POL-0011-XX	4000

Available Color



****Custom Colors is available as request.**

Anchor Bolt Kit for this pole
Ordering Code: AUN-ACB-0005-00

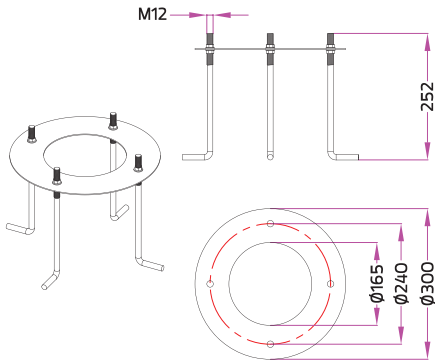


For Luminaires :




NeoPLACE

POLE AND ANCHOR BOLT KIT

Aluminum Pole

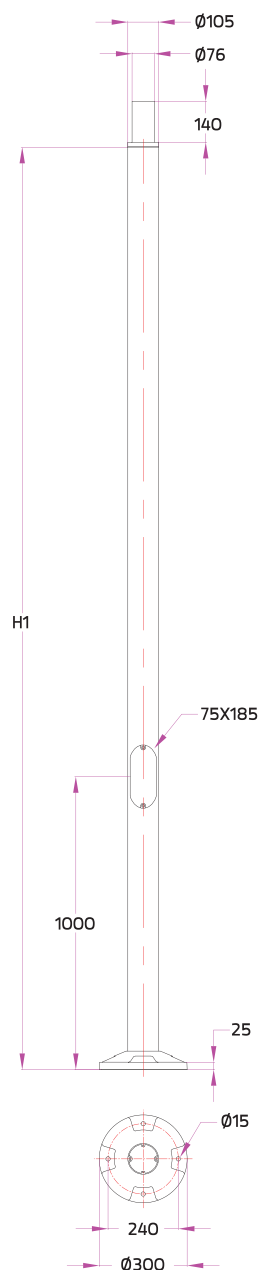

Anchor Bolt Kit for this pole
Ordering Code: AUN-ACB-0005-00

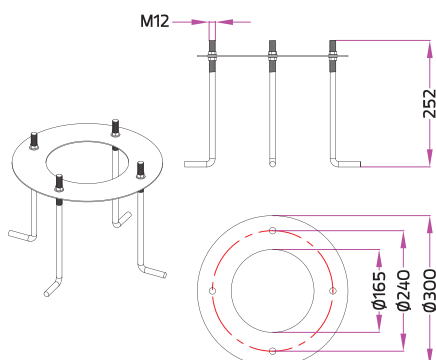

Cylindrical Aluminum Pole, Diameter 105mm, Spigot 76mm.

Type	Ordering Code	H1 (mm.)
16A Fuse + Prepared for dimming	AUN-POL-0006-XX	3000
	AUN-POL-0007-XX	3500
	AUN-POL-0008-XX	4000

Available Color




****Custom Colors is available as request.**

For Luminaires :




Customized Pole Mounting Options :


for Mega SONIC Pole Array :

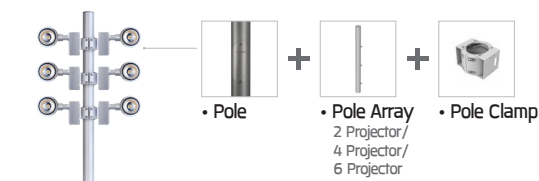


for KUBIK Pole Array :

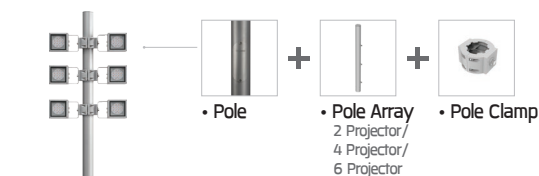

Pole Top Mount Option :

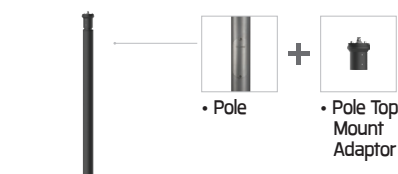


For Luminaires :




POLE AND ANCHOR BOLT KIT

Aluminum Pole

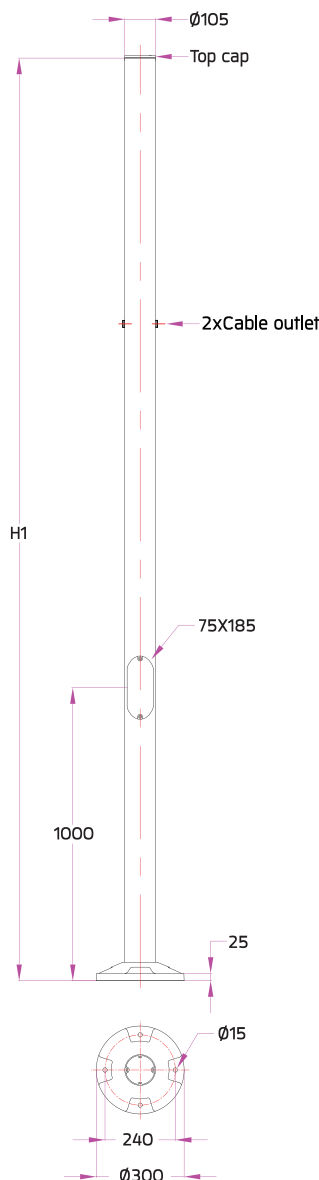

Anchor Bolt Kit for this pole
Ordering Code: AUN-ACB-0005-00

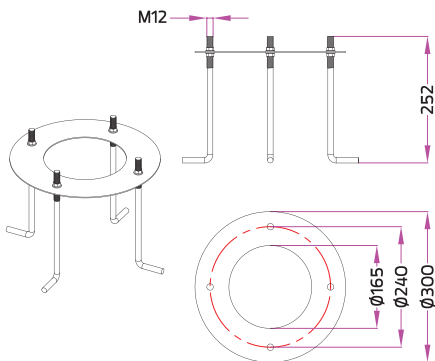

Cylindrical Aluminum Pole, Diameter 105mm, With Cable Outlets And Top Cap.


Type	Ordering Code	H1 (mm.)
16A Fuse + Prepared for dimming	AUN-POL-0021-XX	3500
	AUN-POL-0022-XX	4000

Available Color



***Custom Colors is available as request.*



For Luminaires :




Neo EQUINOX Clamp /
Neo EQUINOX Clamp – DS

Customized Pole Mounting Options :

Option 1 :

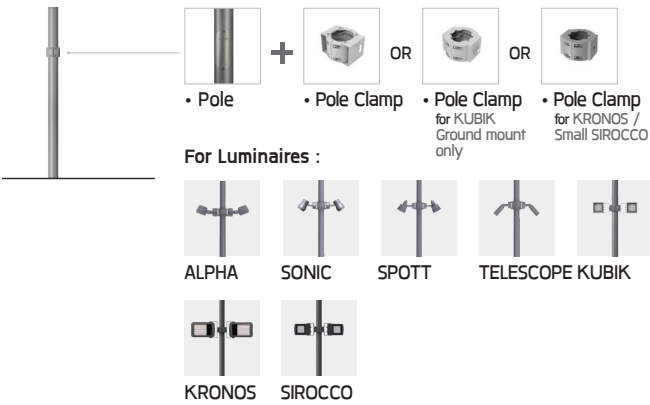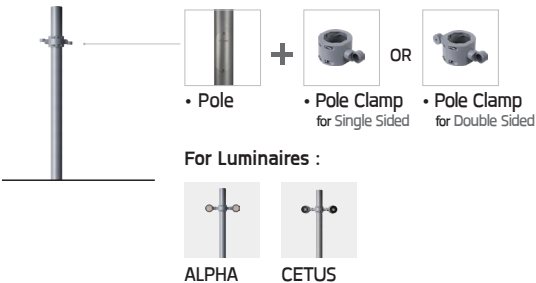


Option 2 :

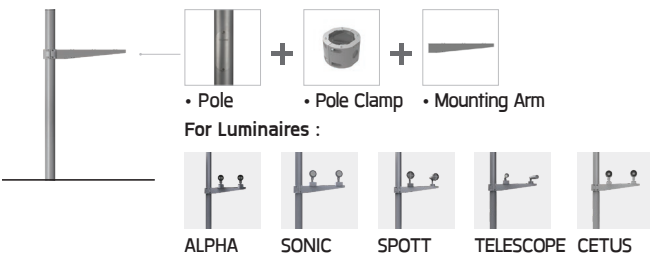

POLE AND ANCHOR BOLT KIT

Aluminum Pole

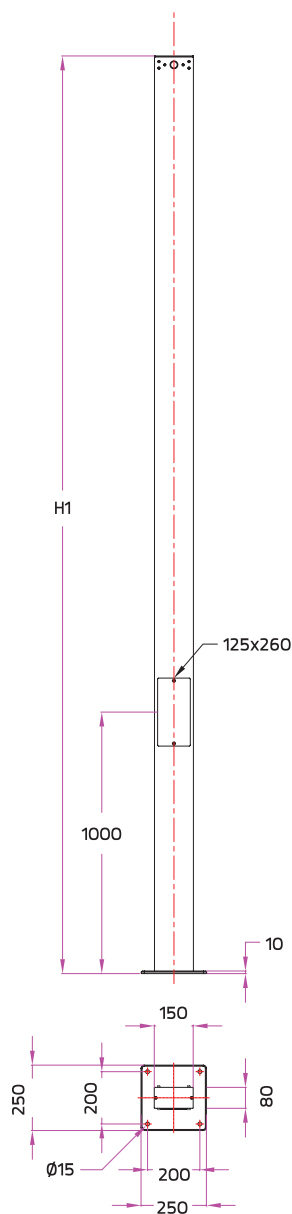

Aluminum Pole, 150x82mm, With Flange Base.


Type	Ordering Code	H1 [mm.]
Aluminum Pole for Single Sided Luminaire Mounting	AUN-POL-0035-XX	4500
Aluminum Pole for Double Sided Luminaire Mounting	AUN-POL-0045-XX	4500

Available Color



****Custom Colors is available as request.**

Anchor Bolt Kit for this pole
Ordering Code: AUN-ACB-0022-00

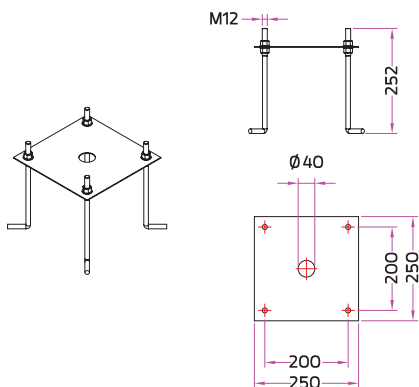

For Luminaires :



KORNER1
Single Sided



KORNER1
Double Sided




KORNER2
Single Sided



KORNER2
Double Sided

POLE AND ANCHOR BOLT KIT

Aluminum Pole

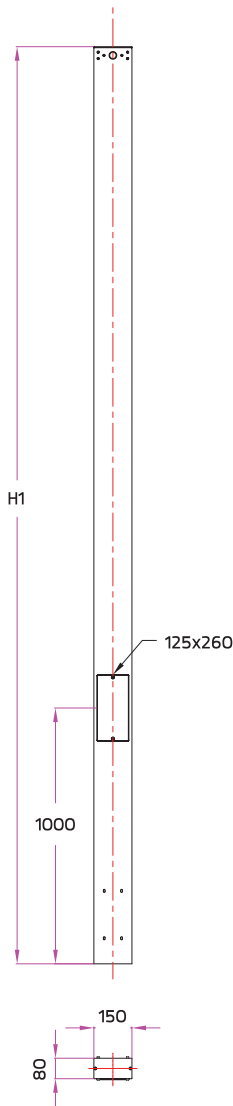

Aluminum Pole 150x82mm, With Internal Anchorage Unit.


Type	Ordering Code	H1 [mm.]
Aluminum Pole for Single Sided Luminaire Mounting	AUN-POL-0039-XX	4500
Aluminum Pole for Double Sided Luminaire Mounting	AUN-POL-0049-XX	4500

Available Color



****Custom Colors is available as request.**

Anchor Bolt Kit for this pole
Ordering Code: AUN-ACB-0023-00

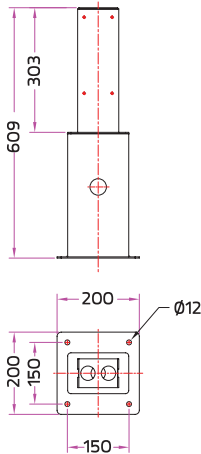

For Luminaires :



KORNER1
Single Sided



KORNER1
Double Sided




KORNER2
Single Sided



KORNER2
Double Sided

POLE AND ANCHOR BOLT KIT

Galvanized Steel Pole

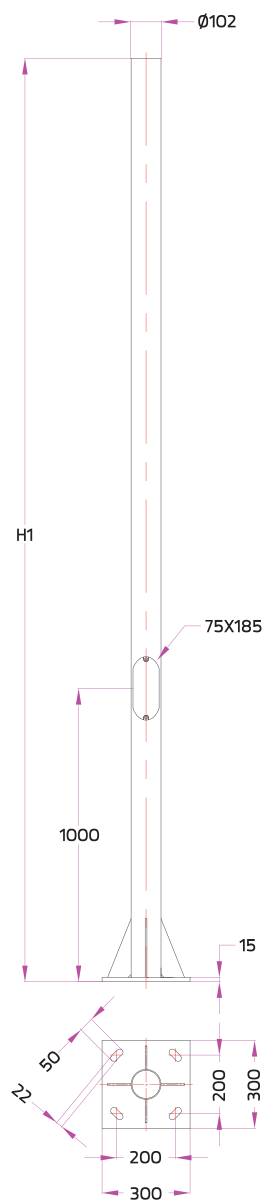

Cylindrical Hot-Dip Galvanized Steel Pole, Diameter 102mm.


Type	Ordering Code	H1 [mm.]
16A Fuse + Prepared for dimming	AUN-POL-0004-XX	4000
	AUN-POL-0005-XX	5000
	AUN-POL-0028-XX	6000

Available Color



****Custom Colors is available as request.**

Anchor Bolt Kit for this pole
Ordering Code: AUN-ACB-0008-00

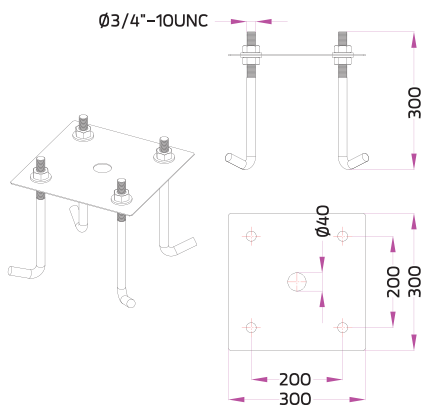

For Luminaires :



HELIOS



HELIOS




MARANELLO




BLAZE

POLE AND ANCHOR BOLT KIT

Galvanized Steel Pole

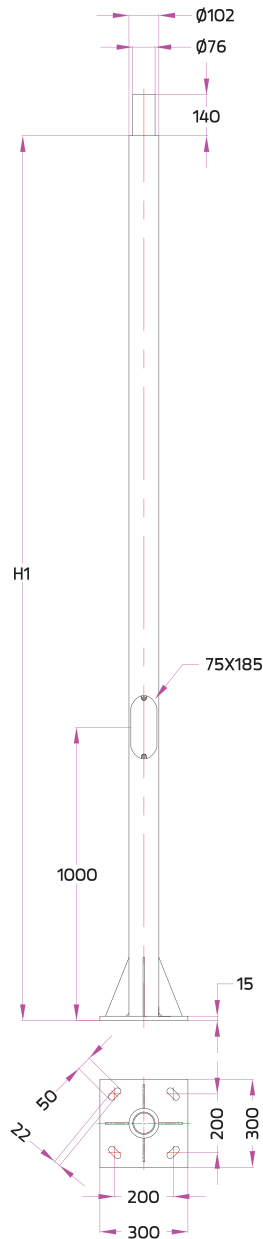

Anchor Bolt Kit for this pole
Ordering Code: AUN-ACB-0008-00

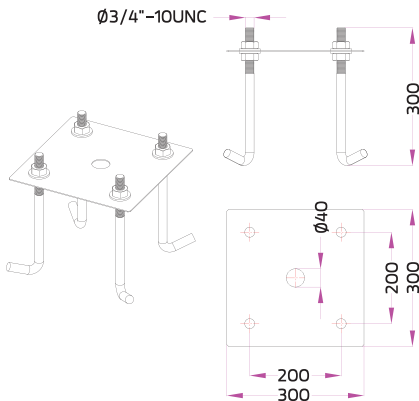

Cylindrical Hot-Dip Galvanized Steel Pole, Diameter 102mm, Spigot 76mm.

Type	Ordering Code	H1 [mm.]
16A Fuse + Prepared for dimming	AUN-POL-0012-XX	4000
	AUN-POL-0013-XX	5000
	AUN-POL-0029-XX	6000

Available Color




****Custom Colors is available as request.**

For Luminaires :




Customized Pole Mounting Options :


for Mega SONIC Pole Array :

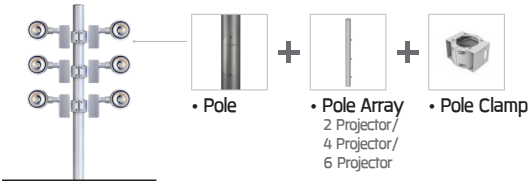


for KUBIK Pole Array :

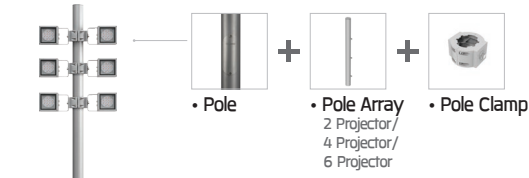

Pole Top Mount Option :

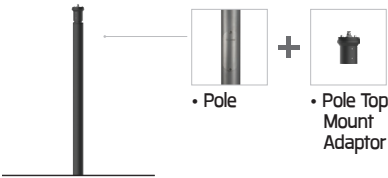


For Luminaires :




POLE AND ANCHOR BOLT KIT

Galvanized Steel Pole

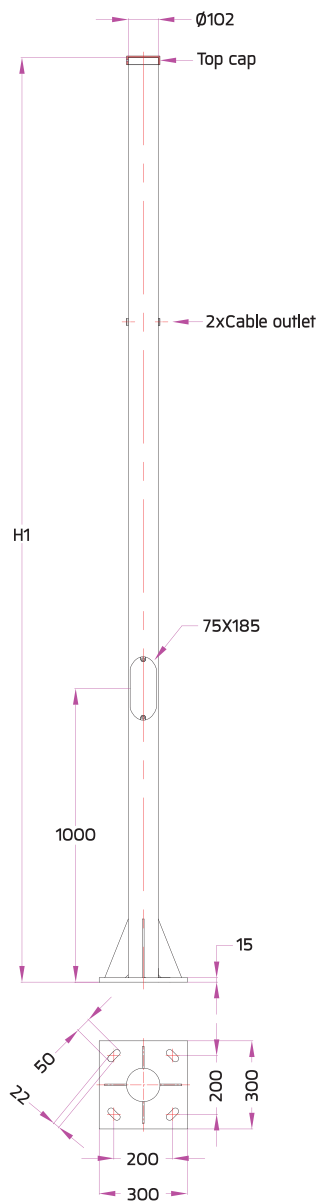

Anchor Bolt Kit for this pole
Ordering Code: AUN-ACB-0008-00

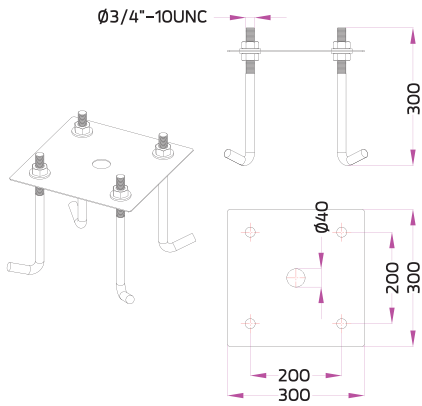

Cylindrical Hot-Dip Galvanized Steel Pole, Diameter 102mm, With Cable Outlets And Top Cap.


Type	Ordering Code	H1 [mm.]
16A Fuse + Prepared for dimming	AUN-POL-0023-XX	4000
	AUN-POL-0024-XX	5000

Available Color



***Custom Colors is available as request.*

For Luminaires :



Neo EQUINOX Clamp /
Neo EQUINOX Clamp - DS

Customized Pole Mounting Options :

Option 1 :

• Pole

• Pole Clamp

OR

• Pole Clamp for KUBIK Ground mount only

OR

• Pole Clamp for KRONOS / Small SIROCCO

For Luminaires :

ALPHA

SONIC

SPOTT

TELESCOPE KUBIK

KRONOS

SIROCCO

• Pole

• Pole Clamp for Single Sided

OR

• Pole Clamp for Double Sided

For Luminaires :

ALPHA

CETUS

Option 2 :

• Pole

• Pole Clamp

• Mounting Arm

For Luminaires :

ALPHA

SONIC

SPOTT


TELESCOPE

CETUS



POLE AND ANCHOR BOLT KIT

Galvanized Steel Pole

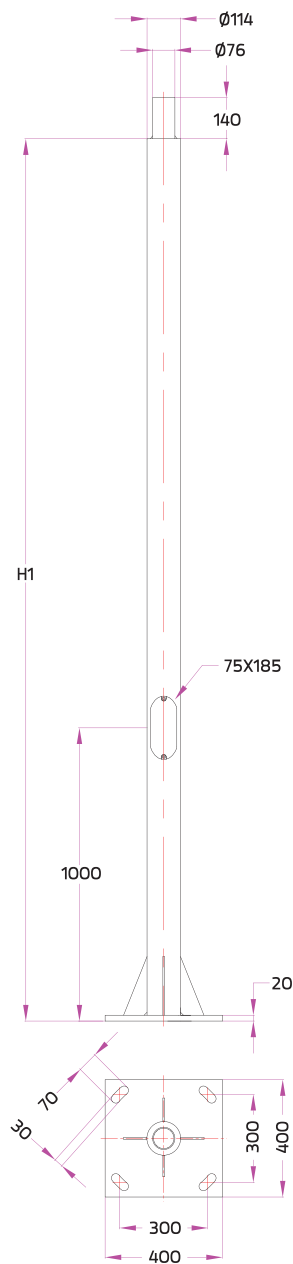

Cylindrical Hot-Dip Galvanized Steel Pole, Diameter 114mm, Spigot 76mm.

Type	Ordering Code	H1 [mm.]
16A Fuse + Prepared for dimming	AUN-POL-0018-XX	6000

Available Color




***Custom Colors is available as request.*

For Luminaires :



Anchor Bolt Kit for this pole
Ordering Code: AUN-ACB-0009-00

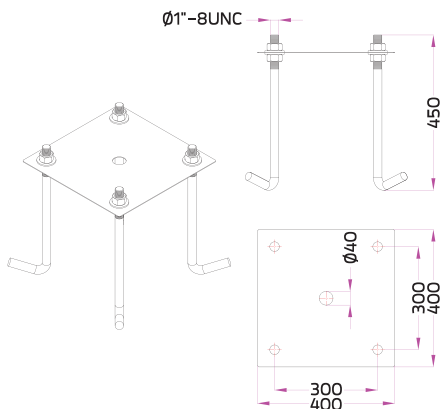

Customized Pole Mounting Options :

Pole Top Mount Option :




For Luminaires :




POLE AND ANCHOR BOLT KIT

Galvanized Steel Pole

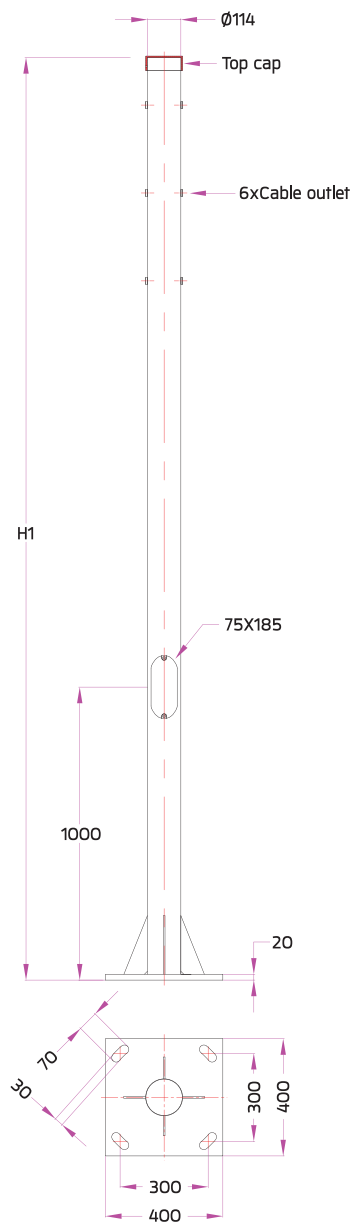

Anchor Bolt Kit for this pole
Ordering Code: AUN-ACB-0009-00

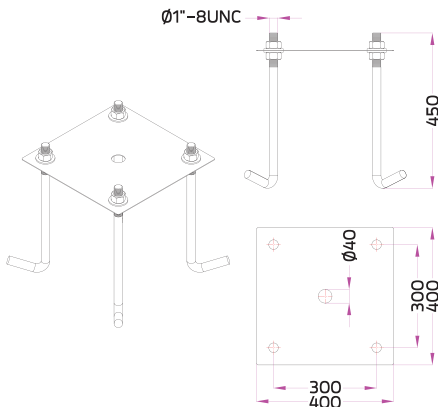

Cylindrical Hot-Dip Galvanized Steel Pole, Diameter 114mm, With Cable Outlets And Top Cap.

Type	Ordering Code	H1 [mm.]
16A Fuse + Prepared for dimming	AUN-POL-0014-XX	5000
	AUN-POL-0015-XX	6000

Available Color



****Custom Colors is available as request.**

Customized Pole Mounting Options :

Option 1 :

• Pole + • Pole Clamp

For Luminaires :

CANNON KRONOS SIROCCO SPACE

Option 2 :


• Pole + • Wall or Pole Mounting Arm

For Luminaires :


CANNON KRONOS SIROCCO SPACE

POLE AND ANCHOR BOLT KIT

Galvanized Steel Pole

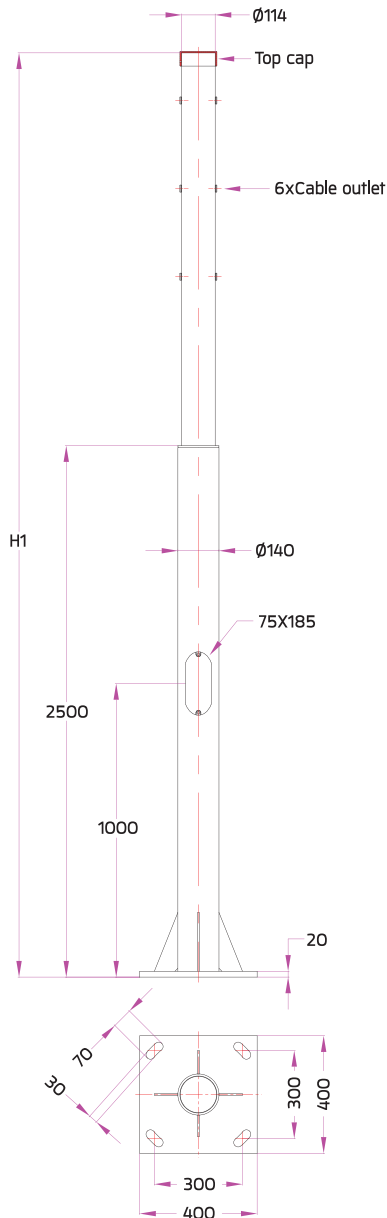

Anchor Bolt Kit for this pole
Ordering Code: AUN-ACB-0009-00

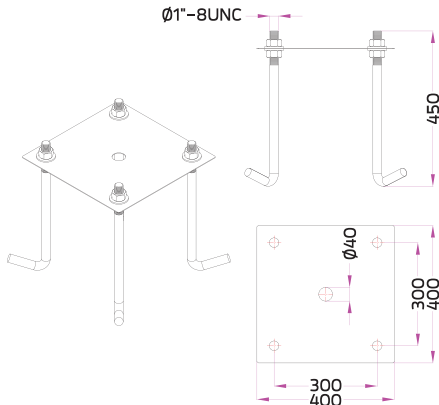

Cylindrical Hot-Dip Galvanized Steel Pole, Stepped Diameter 140/114mm, With Cable Outlets And Top Cap.

Type	Ordering Code	H1 [mm.]
16A Fuse + Prepared for dimming	AUN-POL-0016-XX	7000
	AUN-POL-0017-XX	8000


Available Color



****Custom Colors is available as request.**

Customized Pole Mounting Options :


Option 1 :

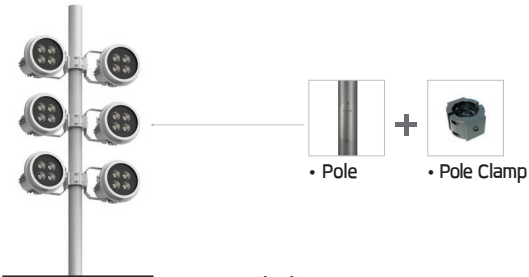

For Luminaires :



Option 2 :

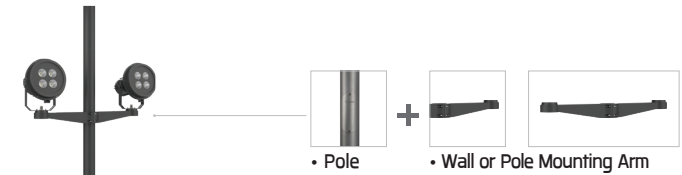


For Luminaires :




POLE AND ANCHOR BOLT KIT

Galvanized Steel Pole

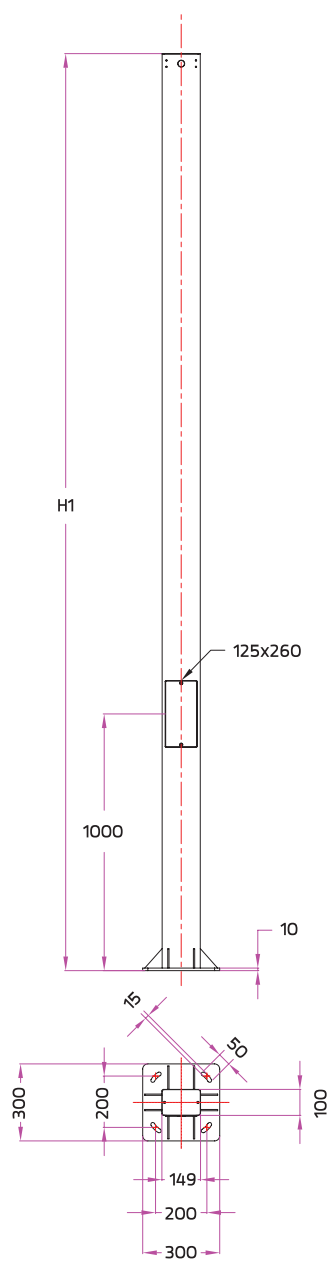

Anchor Bolt Kit for this pole
Ordering Code: AUN-ACB-0008-00

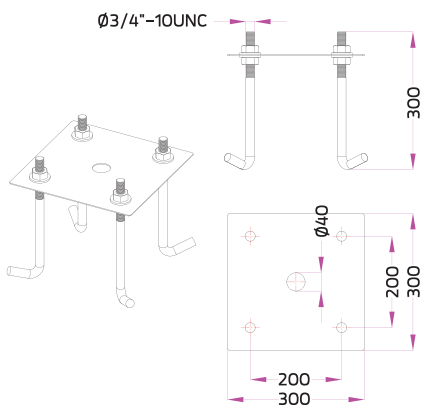

Hot-Dip Galvanized Steel Pole, 151x102mm, With Flange Base.

Type	Ordering Code	H1 [mm.]
Galvanized Steel Pole for Single Sided Luminaire Mounting	AUN-POL-0036-XX	6000
	AUN-POL-0037-XX	7000
	AUN-POL-0038-XX	8000
Galvanized Steel Pole for Double Sided Luminaire Mounting	AUN-POL-0046-XX	6000
	AUN-POL-0047-XX	7000
	AUN-POL-0048-XX	8000

Available Color



****Custom Colors is available as request.**

For Luminaires :



KORNER1
Single Sided



KORNER1
Double Sided




KORNER2
Single Sided



KORNER2
Double Sided

POLE AND ANCHOR BOLT KIT

Galvanized Steel Pole

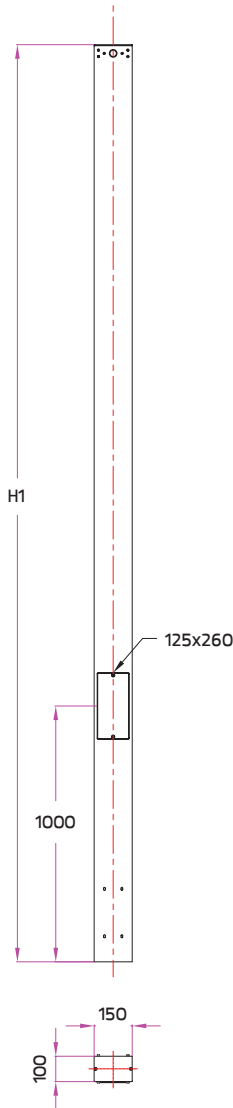

Hot-Dip Galvanized Steel Pole 151x102mm, With Internal Anchorage Unit.


Type	Ordering Code	H1 [mm.]
Galvanized Steel Pole for Single Sided Luminaire Mounting	AUN-POL-0040-XX	6000
	AUN-POL-0041-XX	7000
	AUN-POL-0042-XX	8000
Galvanized Steel Pole for Double Sided Luminaire Mounting	AUN-POL-0050-XX	6000
	AUN-POL-0051-XX	7000
	AUN-POL-0052-XX	8000

Available Color



****Custom Colors is available as request.**

Anchor Bolt Kit for this pole
Ordering Code: AUN-ACB-0024-00

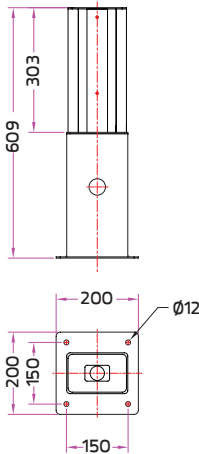

For Luminaires :



KORNER1
Single Sided



KORNER1
Double Sided




KORNER2
Single Sided



KORNER2
Double Sided

POLE AND ANCHOR BOLT KIT

Anchor Bolt Kit
Ordering Code: AUN-ACB-0001-00

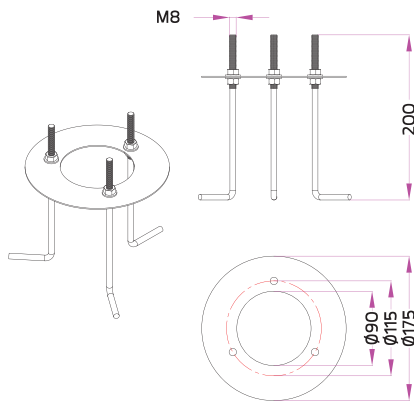

For Luminaires :



AGAR



CYCLOPS




FUJI



MACRON

Anchor Bolt Kit
Ordering Code: AUN-ACB-0002-00

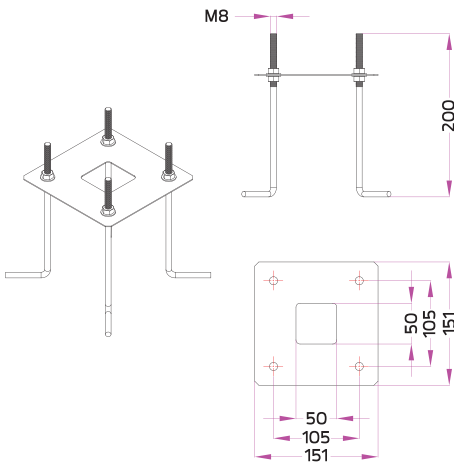

For Luminaires :




BICEPS



TOWER



Anchor Bolt Kit
Ordering Code: AUN-ACB-0003-00

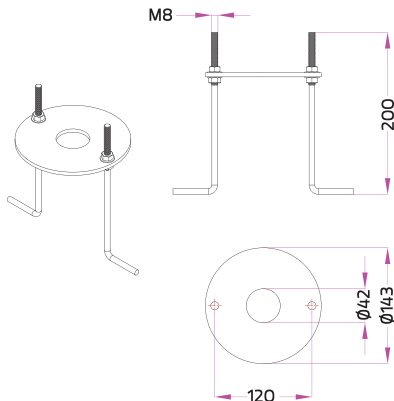


For Luminaires :



Medium CAP

POLE AND ANCHOR BOLT KIT

Anchor Bolt Kit
 Ordering Code: AUN-ACB-0004-00

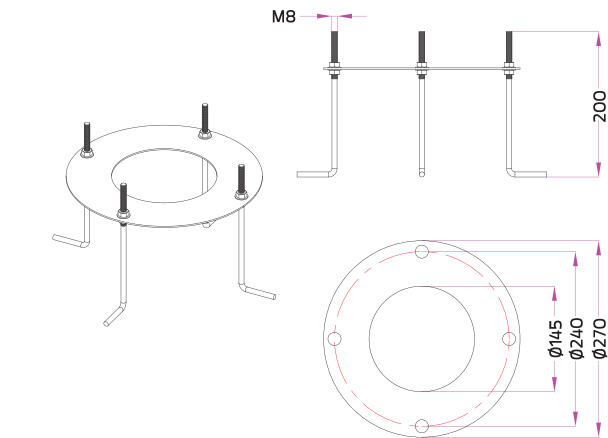

For Luminaires :




BUZZ



SHOOTER

Anchor Bolt Kit
 Ordering Code: AUN-ACB-0007-00

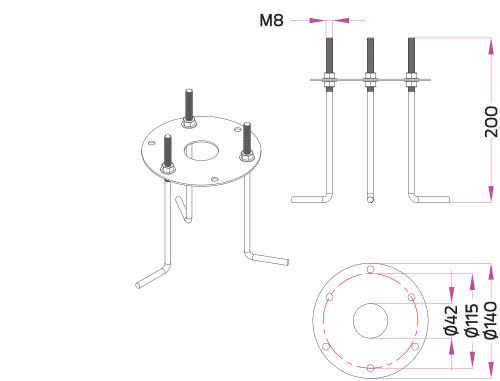

For Luminaires :



Medium SONIC Stand




Mega SONIC Stand



Medium CHARISMA Round



Anchor Bolt Kit
 Ordering Code: AUN-ACB-0011-00

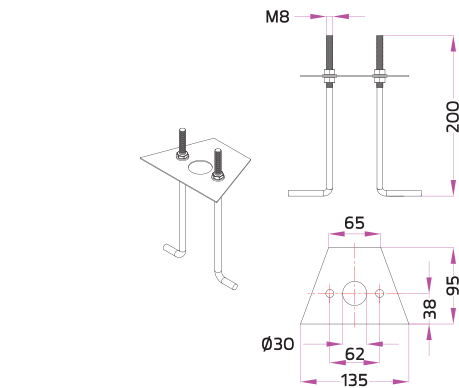


For Luminaires :




ZOID

POLE AND ANCHOR BOLT KIT


Anchor Bolt Kit
Ordering Code: AUN-ACB-0014-00



Anchor Bolt Kit
Ordering Code: AUN-ACB-0015-00

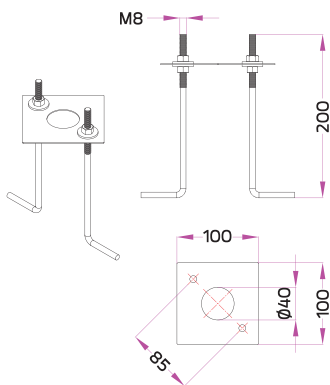


Anchor Bolt Kit
Ordering Code: AUN-ACB-0018-00

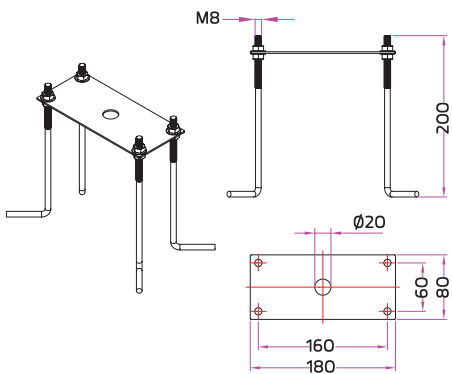


For Luminaires :



For Luminaires :

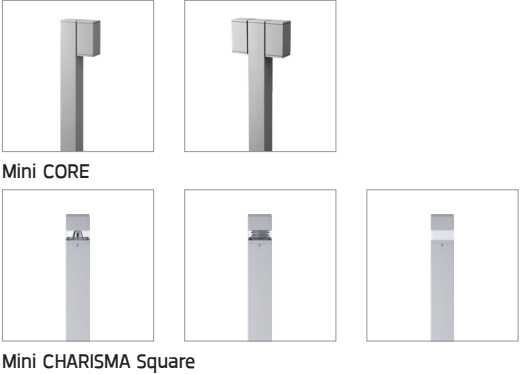


For Luminaires :



POLE AND ANCHOR BOLT KIT

Anchor Bolt Kit
Ordering Code: AUN-ACB-0019-00




For Luminaires :



Mini PILLAR

Anchor Bolt Kit
Ordering Code: AUN-ACB-0020-00

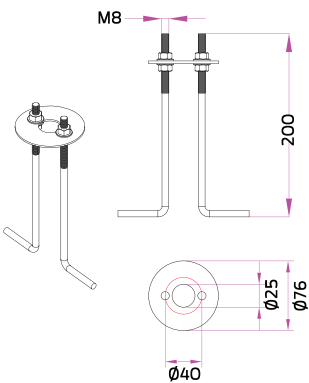


For Luminaires :



Medium CAP

Anchor Bolt Kit
Ordering Code: AUN-ACB-0021-00




For Luminaires :



Medium CAP

POLE AND ANCHOR BOLT KIT

Anchor Bolt Kit
Ordering Code: AUN-ACB-0005-00

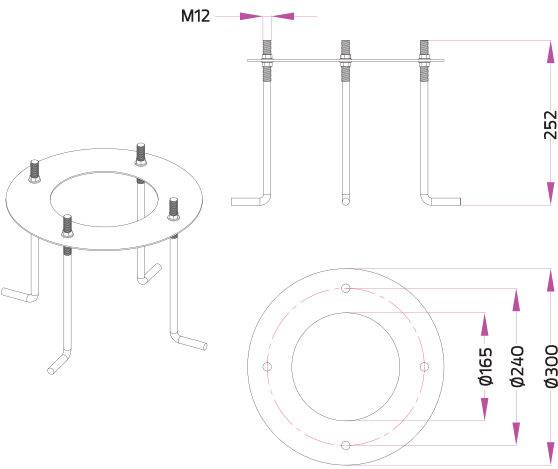


For Luminaires :



Mini PILLAR

Anchor Bolt Kit
Ordering Code: AUN-ACB-0016-00

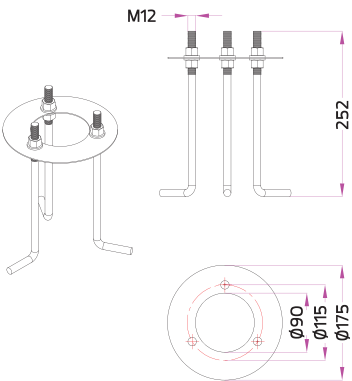

For Luminaires :




STICK



PILLAR

Anchor Bolt Kit
Ordering Code: AUN-ACB-0013-00

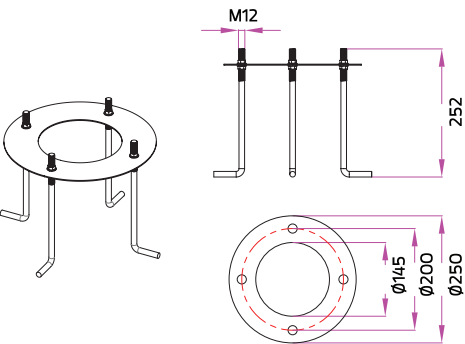


For Luminaires :




Medium CAP

POLE AND ANCHOR BOLT KIT

Anchor Bolt Kit
Ordering Code: AUN-ACB-0017-00

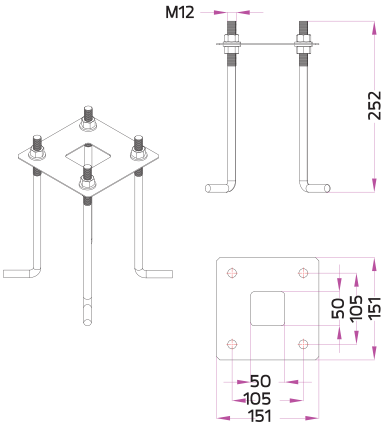

For Luminaires :



BICEPS

Siam Power, Nonthaburi – THAILAND







■ ACCESSORIES

Ordering Code		Product Name		
Pre-Wired Cable and Power Cable				
		AUN-CAB-0001-00	Cable HO7RN-F 2x1sqmm, L= 2000, with UniBlock anti-humidity kit, pre-assembly from factory	for ALPHA
		AUN-CAB-0002-00	Cable HO7RN-F 3x1sqmm, L= 2000, with UniBlock anti-humidity kit, pre-assembly from factory	for ALPHA, ATHLON, CORE, SONIC, SPOTT, TELESCOPE, TUBE, VELA
		AUN-CAB-0003-00	Cable 3x1sqmm and 2x0.35sqmm, L= 2000, with UniBlock anti-humidity kit, pre-assembly from factory	for ALPHA, ATHLON, CORE, SONIC, SPOTT, TELESCOPE, TUBE
		AUN-CAB-0004-00	Cable HO7RN-F 3x1sqmm, L= 500, with UniBlock anti-humidity kit, pre-assembly from factory	for ALPHA, ATHLON, CORE, SONIC, SPOTT, TELESCOPE, TUBE, VELA
		AUN-CAB-0005-00	Cable HO5RN-F 2x1sqmm, L= 500, with UniBlock anti-humidity kit, pre-assembly from factory	for ALPHA
		AUN-CAB-0006-00	Feed in cable, L= 300, with end cap and front cap	for LuxBeat
		AUN-CAB-0012-00	Cable HO5RR-F 5x1, L= 2000mm, with UniBlock anti-humidity kit, pre-assembly from factory	for VELA
		AUN-CAB-0013-00	Cable HO5RR-F 5x1, L= 500mm, with UniBlock anti-humidity kit, pre-assembly from factory	for VELA
		AUN-CAB-0041-00	Feed in cable 2x0.75sqmm, L= 1000mm, with M12 IP68 connector	for LuxBeat Underwater
		AUN-CAB-0043-00	Extended pre-wired cable 2x1sqmm, L=3000mm, with UniBlock anti-humidity kit, pre-assembly from factory	for LuxBeat Underwater
		AUN-CAB-0044-00	Extended pre-wired cable 2x1sqmm, L=6000mm, with UniBlock anti-humidity kit, pre-assembly from factory	for LuxBeat Underwater
		ATR-CAB-0006-00	Cable UNITRONIC Li2YCYv (TP) length 2000mm. [DMX]	for ARC, KUBIK, Mini QUARK, VAREE
Connector and Distribution Box				
		AUN-CON-0003-00	IP68 Connector, cable diameter 8-10mm, gel-filled for through wiring	for ACQUA, ARC, AYERS, BUZZ, GRAVITON, QUARK, SHOOTER, SIRIUS, VAREE, ZET
		AUN-CON-0004-00	IP68 Connector, cable diameter 8-10mm, gel-filled	for ACQUA, ARC, AYERS, GRAVITON, QUARK, ZET
		AUN-CON-0007-00	IP68 distribution box, series wiring , for 1-3 luminaires	for ATOM, DOT, ZET, POLKA
		AUN-CON-0008-00	IP68 Connector, cable diameter 8-10mm, gel-filled for through wiring, 1-10V or DALI	for ARC, AYER, BUZZ, GRAVITON, QUARK, SHOOTER
		AUN-CON-0009-00	IP68 connection device, cable diameter 5-9.5mm, On-Off	for AGAR, ARC, ALPHA, BICEPS, CANNON, CAP, CETUS, CHARISMA, CYCLOPS, FUJI, KORNER, KRONOS, KUBIC, MACRON, Mini PILLAR, Mini QUARK, Mini TUBE, NEOS, SIRIUS, SIROCCO, SONIC, SPACE, SPOTT, TELESCOPE, TOWER
		AUN-CON-0010-00	IP68 connection device 3 pole, cable diameter 5-9.5mm, with distribution block	for AGAR, ARC, ALPHA, BICEPS, CANNON, CHARISMA, CYCLOPS, FUJI, KORNER, KRONOS, KUBIC, MACRON, Mini QUARK, Mini PILLAR, NEOS, SIRIUS, SIROCCO, SONIC, SPACE, SPOTT, TELESCOPE, TOWER
		AUN-CON-0011-00	IP68 connection device, cable diameter 7.1-13mm, 1-10V or DALI	for AGAR, ALPHA, ARC, BICEPS, CANNON, CAP, CETUS, CHARISMA, CYCLOPS, FUJI, KORNER, KUBIK, MACRON, Mini PILLAR, Mini TUBE, NEOS, SPACE, SIRIUS, SIROCCO, SONIC, SPOTT, TELESCOPE, TOWER

Ordering Code		Product Name		
Connector and Distribution Box				
		AUN-CON-0012-00	IP68 connection device 5 pole, cable diameter 7.1–13mm, with distribution block , 1–10V or DALI	for AGAR, ARC, BICEPS, CANNON, CHARISMA, CYCLOPS, FUJI, KORNER, MACRON, Mini PILLAR, Mini QUARK, Mini TUBE, NEOS, SIRIUS, SONIC, SPACE, TOWER
		AUN-CON-0013-00	IP68 connection device, cable diameter 7–11.5mm, On–Off	for AGAR, ALPHA, ARC, AYERS, BICEPS, CANNON, CAP, CETUS, CHARISMA, CYCLOPS, FUJI, KORNER, KRONOS, KUBIK, MACRON, Mini PILLAR, Mini TUBE, NEOS, QUARK, SE7EN, SIROCCO, SONIC, SPACE, SPOTT, TELESCOPE, TOWER, ZET
		AUN-CON-0014-00	IP68 connection device, cable diameter 8–12.5mm, 1–10V or DALI	for AGAR, ALPHA, ARC, BICEPS, CANNON, CAP, CETUS, CHARISMA, CYCLOPS, FUJI, KORNER, KRONOS, KUBIK, MACRON, Mini PILLAR, Mini QUARK, Mini TUBE, NEOS, SIROCCO, SONIC, SPACE, TELESCOPE, TOWER
		AUN-CON-0015-00	Feed in cable 2x0.75sqmm, L= 2000mm, for monochromatic luminaire, with M12 connector	for LuxBeat XL
		AUN-CON-0022-00	IP67 connection device, cable diameter 4.5–11mm, DMX	for ARC, KUBIK, Mini QUARK, VAREE, Medium ALPHA Round–Gear[DMX]
		AUN-CON-0023-00	IP67 connection device, cable diameter 4.5–11mm, distribution block , DMX	for ARC, KUBIK, Mini QUARK, VAREE, Medium ALPHA Round–Gear[DMX]
		AUN-CON-0024-00	IP68 Connector, cable diameter 4.8–6mm, gel–filled	for ATOM, POLKA, VAREE, VOLGA
		ATR-CON-0002-00	Feed in cable 5x0.75sqmm, L= 2000mm, for RGBW luminaire , with M12 connector	for LuxBeat XL
LED Converter				
		AUN-COV-0002-00	LED constant current convertor input 12–24VDC, 700mA, 14W, with IP67 GFR polymer enclosure, On–Off	for ATOM-CC, DOT-CC, POLKA-CC, VOLGA-CC
RGBW Control				
		AUN-CTR-0001-00	Touch panel, EDT4, RGBW, DALI	for ARC CC, ALPHA-CC, KUBIK-CC, Mini QUARK-CC, SHOOTER, SPACE-CC, SIRIUS-CC, VAREE-CC
		AUN-CTR-0002-00	Bus power supply, 15VDC 220mA, 3.3W, DALI	for ARC-CC, ALPHA-CC, KUBIK-CC, Mini QUARK-CC, SHOOTER, SPACE-CC, SIRIUS-CC, VAREE-CC
		AUN-DMX-0023-00	DMX controller, Nicolaudie STICK-KE2	for ARC-CC[DMX], KUBIK-CC[DMX], Mini QUARK-CC[DMX], VAREE-CC, Medium ALPHA Round–Gear[DMX]
		AUN-DMX-0024-00	DMX controller, Nicolaudie SLESA-U9	for ARC-CC[DMX], KUBIK-CC[DMX], Mini QUARK-CC[DMX], VAREE-CC, Medium ALPHA Round–Gear[DMX]
		AUN-DMX-0025-00	DMX controller, Nicolaudie SLESA-U10	for ARC-CC[DMX], KUBIK-CC[DMX], Mini QUARK-CC[DMX], VAREE-CC, Medium ALPHA Round–Gear[DMX]
		AUN-DMX-0026-00	XLR 3 pin male connector, cable UNITRONIC Li2YCYv, L= 1000, DMX	for ARC-CC[DMX], KUBIK-CC[DMX], Mini QUARK-CC[DMX], VAREE-CC, Medium ALPHA Round–Gear[DMX]
		AUN-DMX-0027-01	Splitter, IP67 aluminum enclosure, DMX	for ARC-CC[DMX], KUBIK-CC[DMX], Mini QUARK-CC[DMX], VAREE-CC, Medium ALPHA Round–Gear[DMX]
LED Constant Current Driver				
		AUN-DRG-0019-01	RGBW LED constant current driver [SELV output], 4x700mA, 4x25W, with IP66 aluminum enclosure, DALI, with 10kV Surge protection	for VAREE
RGBW LED Driver				
		AUN-DRG-0002-01	LED constant current driver, 700mA, 1–20W, with IP67 GFR polymer enclosure, On–Off	for ZET Adjustable

Ordering Code		Product Name	
LED Constant Current Driver			
		AUN-DRG-0003-01 LED constant current driver, 350mA, 1-15W, with IP67 GFR polymer enclosure, On-Off	for ZET Round, ZET Round Opal, ZET Square
		AUN-DRG-0004-01 LED constant current driver, 1050mA, 22W, with IP67 GFR polymer enclosure, On-Off	for Mini ALPHA-CC, Mini KUBIK-CC, ZET Round, ZET Round Opal, ZET Square
		AUN-DRG-0005-01 LED constant current driver, 700mA, 20W, with IP67 GFR polymer enclosure, 1-10V	for ZET Adjustable
		AUN-DRG-0006-01 LED constant current driver, 1050mA, 38W, with IP67 GFR polymer enclosure, DALI	for Mini ALPHA, Mini KUBIK, ZET Round, ZET Round Opal, ZET Square
		AUN-DRG-0007-00 LED constant current driver, 1200mA, 6W, with IP67 GFR polymer enclosure, On-Off	for Micro ALPHA Round, Micro KUBIK, VOLGA
		AUN-DRG-0008-00 LED constant current driver, 700mA, 40W, with IP67 GFR polymer enclosure, On-Off	for Medium ALPHA Round
		AUN-DRG-0009-00 LED constant current driver, 700mA, 32W, with IP67 GFR polymer enclosure, 1-10V	for Medium ALPHA Round
		AUN-DRG-0010-00 LED constant current driver, 700mA, 38W, with IP67 GFR polymer enclosure, DALI	for Medium ALPHA Round, ZET Adjustable
		AUN-DRG-0012-00 LED constant current driver, 700mA, 20W, with IP67 GFR polymer enclosure, DALI, with IP68 series distribution box for 2-3 luminaires	for ATOM, DOT, VOLGA
		AUN-DRG-0013-00 LED constant current driver, 250mA, 10W, with IP67 GFR polymer enclosure, On-Off	for Mini AYERS, ZET Adjustable
		AUN-DRG-0014-00 LED constant current driver, 250mA, 13W, with IP67 GFR polymer enclosure, 1-10V	for Mini AYERS, ZET Adjustable
		AUN-DRG-0015-00 LED constant current driver, 250mA, 11W, with IP67 GFR polymer enclosure, DALI	for Mini AYERS, ZET Adjustable
		AUN-DRG-0016-00 LED constant current driver, 500mA, 27W, with IP67 GFR polymer enclosure, DALI	for Mini QUARK
		AUN-DRG-0021-00 LED constant current driver, 1050mA, 38W, with IP67 GFR polymer enclosure, 1-10V	for Mini ALPHA, Mini KUBIK, ZET
		AUN-DRG-0026-00 LED constant current driver, 500mA, 12W, with IP67 GFR polymer enclosure, On-Off	For VOLGA
		AUN-DRG-0112-01 LED constant current decoder, 4x700mA, 4x23W, with IP67 GFR polymer enclosure, DMX512/RDM	for VAREE, Mini QUARK [DMX]
		AUN-DRG-0113-01 LED constant current decoder, 4x500mA, 4x16W, with IP67 GFR polymer enclosure, DMX512/RDM	for ARC [DMX], Mini QUARK [DMX]
		AUN-DRG-0120-00 LED constant current driver, 350mA, 15W, with IP67 GFR polymer enclosure, On-Off	for ZET
		AUN-DRG-0121-00 LED constant current driver, 350mA, 18W, with IP67 GFR polymer enclosure, 1-10V	for ZET
		AUN-DRG-0122-00 LED constant current driver, 350mA, 18W, with IP67 GFR polymer enclosure, DALI	for ZET
		AUN-GOP-0101-01 LED constant current driver, 700mA, 4W, with IP67 GFR polymer enclosure, On-Off	for DOT, ATOM, VOLGA

Ordering Code		Product Name		
LED Constant Voltage Driver				
		AUN-DRG-0011-00	LED constant voltage driver, 24VDC, 150W	for ACQUA, ALPHA, ARC [DMX], ATOM, DOT, I-BRICK, KUBIK, Mini ARGOS, Mini CYCLOPS, Mini QUARK, Mini SHOOTER, Mini SKUNA, Mini SONIC, SIRIUS, VAREE, VOLGA, ZET, ZOUK
		AUN-DRG-0022-00	LED constant voltage driver, 24VDC, 60W, DALI	for LuxBeat, LuxBeat XL
		AUN-DRG-0023-00	LED constant voltage driver, 24VDC, 120W, DALI	for LuxBeat, LuxBeat XL
		AUN-DRG-0024-00	LED constant voltage driver, 24VDC, 200W	for ATOM, ARC [DMX], DOT, KUBIK, Mini QUARK [DMX], VAREE, VOLGA
		AUN-DRG-0025-00	LED constant voltage driver, 24VDC, 200W, DALI	for LuxBeat, LuxBeat XL
		AUN-DRG-0027-00	LED constant voltage driver, 24VDC, 72W	for ACQUA, ALPHA, ARC [DMX], ATOM, DOT, I-BRICK, Mini ARGOS, Mini CYCLOPS, Mini KUBIK, Mini QUARK [DMX], Mini SHOOTER, Mini SKUNA, Mini SONIC, SIRIUS, VAREE, ZET, ZOUK
		AUN-DRG-0114-01	LED constant voltage driver, 12VDC, 12W, with IP67 GFR polymer enclosure	for ATOM, Micro ALPHA Round, Micro KUBIK
		AUN-DRG-0118-00	LED constant voltage driver, 24VDC, 30W	for ATOM, ACQUA, ALPHA, DOT, I-BRICK, KUBIK, VOLGA, ZET, ZOUK
		AUN-DRG-0119-00	LED constant voltage decoder, 24Vdc, 180W, with IP67 GFR polymer enclosure, DMX512/RDM	for LuxBeat XL
Sensor				
		AUN-SEN-0001-00	Photocell, On-Off, pre-assembly from factory	for NEOS
		AUN-SEN-0002-00	Photocell, On-Off, pre-assembly from factory	for Mini SPACE
		AUN-SEN-0003-00	Photocell, On-Off, pre-assembly from factory	for Medium SPACE
		AUN-SEN-0004-00	Microwave motion sensor, On-Off, pre-assembly from factory	for Medium SPACE
Surge protection				
		AUN-SUR-0001-00	Surge protection, 10kV, On-Off, pre-assembly from factory	for CETUS
		AUN-SUR-0002-00	Surge protection, 10kV, DALI, pre-assembly from factory	for CETUS

MECHANICAL ACCESSORY

Suspension kit			
		ATR-MOT-0001-00 Suspension kit, with mounting loop	for LuxBeat XL
		ATR-MOT-0002-00 Suspension kit, with mounting post	for LuxBeat XL

Ordering Code		Product Name	
Wall Bracket			
		AUN-BRK-0001-XX Mounting bracket, L= 250mm, adjustable	for SIRIUS
		AUN-BRK-0002-XX Corner mounting bracket	for NEOS
		AUN-BRK-0003-00 Mounting clip, set of 20pcs	for LuxBeat
		AUN-BRK-0004-XX Mounting bracket	for KORNER
		AUN-BRK-0007-XX Mounting bracket, adjustable	for LuxBeat XL
		AUN-BRK-0008-00 Mounting clip, set of 2pcs, including mounting hardware	for LuxBeat Underwater
		AUN-BRK-0009-00 Mounting clip, set of 20pcs	for LuxBeat
Wall Array and Wall Mounting			
		AUN-MOT-0005-XX Wall array, for 2 projector	for KUBIK, Mega SONIC
		AUN-MOT-0006-XX Wall array, for 4 projector	for KUBIK, Mega SONIC
		AUN-MOT-0007-XX Wall array, for 6 projector	for KUBIK, Mega SONIC
		AUN-MOT-0012-XX Wall spacer	for NEOS
		AUN-MOT-0018-XX Outrigger arm, L= 740mm, On-Off, pre-assembly from factory	for CETUS, Medium ALPHA Round – ID
		AUN-MOT-0019-XX Outrigger arm, L= 740mm, 1-10V or DALI, pre-assembly from factory	for CETUS, Medium ALPHA Round – ID
		AUN-MOT-0026-XX Plasterboard wall mounting profile, L= 546mm	for LuxBeat XL 500
		AUN-MOT-0027-XX Plasterboard wall mounting profile, L= 1046mm	for LuxBeat XL 1000
		AUN-MOT-0028-XX Plasterboard wall mounting profile, L= 2046mm	for LuxBeat XL 2000
		AUN-MOT-0029-XX Wall niche mounting profile, L= 546mm	for LuxBeat XL 500
		AUN-MOT-0030-XX Wall niche mounting profile, L= 1046mm	for LuxBeat XL 1000
		AUN-MOT-0031-XX Wall niche mounting profile, L= 2046mm	for LuxBeat XL 2000
		AUN-MOT-0053-XX Outrigger arm, L= 740mm, On-Off, pre-assembly from factory	for Mini ALPHA Round – ID

Ordering Code		Product Name		
Mounting Base				
		AUN-MOT-0003-XX	Mounting base, rotateable, 1-10V or DALI	for CANNON, KRONOS, SPACE, Small SIROCCO
		AUN-MOT-0020-XX	Mounting base, rotateable	for NEOS
		AUN-MOT-0021-XX	Mounting base, rotateable, On-Off, pre-assembly from factory	for CETUS, Medium ALPHA Round – ID
		AUN-MOT-0022-XX	Mounting base, rotateable, 1-10V or DALI, pre-assembly from factory	for CETUS, Medium ALPHA Round – ID
		AUN-MOT-0052-XX	Mounting base, rotateable, On-Off, pre-assembly from factory	for Mini ALPHA Round – ID
		AUN-RCH-0012-XX	Mounting base, rotateable	for NEOS
Pole Mounting				
		AUN-MOT-0001-XX	Pole mount adaptor, spigot diameter 76mm	for CANNON, KRONOS, SPACE, Small SIROCCO
		AUN-MOT-0002-XX	Wall or pole mounting arm, pole diameter 114mm	for CANNON, KRONOS, SPACE, Small SIROCCO
		AUN-MOT-0004-XX	Wall or pole mounting arm, pole diameter 114mm, double sided	for CANNON, KRONOS, SPACE, Small SIROCCO
		AUN-MOT-0008-XX	Pole mount adaptor, rectangular pole	for NEOS
		AUN-MOT-0009-XX	Pole mount adaptor, pole diameter 60mm	for NEOS
		AUN-MOT-0010-XX	Pole mount adaptor, pole diameter 76mm	for NEOS
		AUN-MOT-0011-XX	Pole mount adaptor, pole diameter 102-105mm	for NEOS
		AUN-MOT-0013-XX	Pole mounting arm, for 1-3 projector	for ALPHA, CETUS, SONIC, SPOTT, TELESCOPE
		AUN-MOT-0032-XX	Pole mount adaptor, pole diameter 60mm, On-Off, pre-assembly from factory	for CETUS, Medium ALPHA Round – ID
		AUN-MOT-0033-XX	Pole mount adaptor, pole diameter 60mm, 1-10V or DALI, pre-assembly from factory	for CETUS, Medium ALPHA Round – ID
		AUN-MOT-0034-XX	Pole mount adaptor, pole diameter 76mm, On-Off, pre-assembly from factory	for CETUS, Medium ALPHA Round – ID
		AUN-MOT-0035-XX	Pole mount adaptor, pole diameter 76mm, 1-10V or DALI, pre-assembly from factory	for CETUS, Medium ALPHA Round – ID
		AUN-MOT-0036-XX	Pole mount adaptor, pole diameter 102-105mm, On-Off, pre-assembly from factory	for CETUS, Medium ALPHA Round – ID
		AUN-MOT-0037-XX	Pole mount adaptor, pole diameter 102-105mm, 1-10V or DALI, pre-assembly from factory	for CETUS, Medium ALPHA Round – ID
		AUN-MOT-0038-XX	Pole mount adaptor, rectangular pole, On-Off, pre-assembly from factory	for CETUS, Medium ALPHA Round – ID

Ordering Code		Product Name	
Pole Mounting			
		AUN-MOT-0039-XX Pole mount adaptor, rectangular pole, 1-10V or DALI, pre-assembly from factory	for CETUS, Medium ALPHA Round – ID
		AUN-MOT-0054-XX Pole mount adaptor, rectangular pole, On-Off, pre-assembly from factory	for Mini ALPHA Round – ID
		AUN-MOT-0055-XX Pole mount adaptor, pole diameter 60mm, On-Off, pre-assembly from factory	for Mini ALPHA Round – ID
		AUN-MOT-0056-XX Pole mount adaptor, pole diameter 76mm, On-Off, pre-assembly from factory	for Mini ALPHA Round – ID
		AUN-MOT-0057-XX Pole mount adaptor, pole diameter 102-105mm, On-Off, pre-assembly from factory	for Mini ALPHA Round – ID
Pole Clamp			
		AUN-CLP-0001-XX Pole clamp, pole diameter 114mm	for CANNON 280, CANNON 360, SPACE
		AUN-CLP-0002-XX Pole clamp, pole diameter 102-105mm	for Small SIROCCO, KRONOS
		AUN-CLP-0003-XX Pole clamp, pole diameter 114mm	for Small SIROCCO, KRONOS
		AUN-CLP-0004-XX Pole clamp, pole diameter 102-105mm	for ALPHA, SONIC, SPOTT, TELESCOPE
		AUN-CLP-0005-XX Pole clamp, pole diameter 102-105mm	for KUBIK
		AUN-CLP-0006-XX Pole clamp, pole diameter 60-76mm	for ALPHA, SONIC, SPOTT, TELESCOPE
		AUN-CLP-0007-XX Pole clamp, pole diameter 60-76mm	for KUBIK
		AUN-CLP-0008-XX Pole clamp, pole diameter 102-105mm, for wall or pole mounting arm	for ALPHA, CETUS, SONIC, SPOTT, TELESCOPE
		AUN-CLP-0009-XX Pole clamp, pole diameter 60-76mm, for wall or pole mounting arm	for ALPHA, CETUS, SONIC, SPOTT, TELESCOPE
		AUN-CLP-0010-XX Pole clamp, pole diameter 60mm, single side luminaire mounting	for KORNER
		AUN-CLP-0011-XX Pole clamp, pole diameter 60mm, double sided luminaire mounting	for KORNER
		AUN-CLP-0012-XX Pole clamp, pole diameter 76mm, single side luminaire mounting	for KORNER
		AUN-CLP-0013-XX Pole clamp, pole diameter 76mm, double sided luminaire mounting	for KORNER
		AUN-CLP-0040-XX Pole clamp, pole diameter 60-76mm, single side luminaire mounting , On-Off, pre-assembly from factory	for CETUS, Medium ALPHA Round – ID
		AUN-CLP-0041-XX Pole clamp, pole diameter 60-76mm, single side luminaire mounting , 1-10V or DALI, pre-assembly from factory	for CETUS, Medium ALPHA Round – ID
		AUN-CLP-0042-XX Pole clamp, pole diameter 102-105mm, single side luminaire mounting , On-Off, pre-assembly from factory	for CETUS, Medium ALPHA Round – ID

Ordering Code		Product Name	
Pole Clamp			
		AUN-CLP-0043-XX Pole clamp, pole diameter 102–105mm, single side luminaire mounting , 1–10V or DALI, pre-assembly from factory	for CETUS, Medium ALPHA Round – ID
		AUN-CLP-0044-XX Pole clamp, pole diameter 60–76mm, double sided luminaire mounting , On-Off, pre-assembly from factory	for CETUS, Medium ALPHA Round – ID
		AUN-CLP-0045-XX Pole clamp, pole diameter 60–76mm, double sided luminaire mounting , 1–10V or DALI, pre-assembly from factory	for CETUS, Medium ALPHA Round – ID
		AUN-CLP-0046-XX Pole clamp, pole diameter 102–105mm, double sided luminaire mounting , On-Off, pre-assembly from factory	for CETUS, Medium ALPHA Round – ID
		AUN-CLP-0047-XX Pole clamp, pole diameter 102–105mm, double sided luminaire mounting , 1–10V or DALI, pre-assembly from factory	for CETUS, Medium ALPHA Round – ID
		AUN-CLP-0052-XX Pole clamp, pole diameter 60–76mm, single side luminaire mounting , On-Off, pre-assembly from factory	for Mini ALPHA Round – ID
		AUN-CLP-0053-XX Pole clamp, pole diameter 60–76mm, double sided luminaire mounting , On-Off, pre-assembly from factory	for Mini ALPHA Round – ID
		AUN-CLP-0054-XX Pole clamp, pole diameter 102–105mm, single side luminaire mounting , On-Off, pre-assembly from factory	for Mini ALPHA Round – ID
		AUN-CLP-0055-XX Pole clamp, pole diameter 102–105mm, double sided luminaire mounting , On-Off, pre-assembly from factory	for Mini ALPHA Round – ID
Surface Mounting			
		AUN-MOT-0014-XX Surface mount profile, L= 510mm	for LuxBeat XL 500
		AUN-MOT-0015-XX Surface mount profile, L= 1010mm	for LuxBeat XL 1000
		AUN-MOT-0016-XX Surface mount profile, L= 2010mm	for LuxBeat XL 2000
Earth Spike			
		AUN-ESP-0001-00 Earth spike, GFR polymer	for ATHLON, ALPHA, CETUS, SONIC, SPOTT, TELESCOPE
		AUN-ESP-0002-01 Earth spike, GFR polymer	for ALPHA
		AUN-ESP-0003-XX Earth spike, L= 900mm, aluminum	for Micro ALPHA Round
		AUN-ESP-0004-XX Earth spike, L= 900mm, aluminum	for Micro KUBIK
		AUN-ESP-0005-00 Earth spike, GFR polymer	for Mini KUBIK
		AUN-ESP-0006-XX Earth spike, L= 900mm, aluminum, single side luminaire mounting	for Micro ALPHA Round
		AUN-ESP-0007-XX Earth spike, L= 900mm, aluminum, double sided luminaire mounting	for Micro ALPHA Round
		AUN-ESP-0008-XX Earth spike, L= 900mm, aluminum, On-Off, pre-assembly from factory	for CETUS, Medium ALPHA Round – ID





Ordering Code		Product Name		
Earth Spike				
		AUN-ESP-0009-XX	Earth spike, L= 900mm, aluminum, 1-10V or DALI, pre-assembly from factory	for CETUS, Medium ALPHA Round – ID
		AUN-ESP-0010-XX	Earth spike, L= 900mm, aluminum, single side luminaire mounting	for Micro KUBIK
		AUN-ESP-0011-XX	Earth spike, L= 900mm, aluminum, double sided luminaire mounting	for Micro KUBIK
		AUN-ESP-0012-XX	Earth spike, L= 900mm, aluminum, pre-assembly from factory	for TELESCOPE Spike
		AUN-ESP-0021-XX	Earth spike, L= 900mm, aluminum, On-Off, pre-assembly from factory	for Mini ALPHA Round – ID
		AUN-ESP-0022-XX	Earth spike, L= 1390–1760mm, aluminum, length adjustable, On-Off, pre-assembly from factory	for Mini ALPHA Round – ID
		AUN-ESP-0023-XX	Earth spike, L= 1390–1760mm, aluminum, length adjustable, On-Off, pre-assembly from factory	for CETUS, Medium ALPHA Round – ID
		AUN-ESP-0024-XX	Earth spike, L= 1390–1760mm, aluminum, length adjustable, 1-10V or DALI, pre-assembly from factory	for CETUS, Medium ALPHA Round – ID
Recess Housing				
		AUN-RCH-0005-00	Recessed installation housing	for ZET
		AUN-RCH-0009-01	Recessed installation housing	for SIRIUS 600
		AUN-RCH-0010-01	Recessed installation housing	for SIRIUS 1200
		AUN-RCH-0011-01	Recessed installation housing	for SIRIUS 300
		AUN-RCH-0013-XX	Recessed ceiling mounting profile, L= 546mm	for LuxBeat XL 500
		AUN-RCH-0014-XX	Recessed ceiling mounting profile, L= 1046mm	for LuxBeat XL 1000
		AUN-RCH-0015-XX	Recessed ceiling mounting profile, L= 2046mm	for LuxBeat XL 2000
		AUN-RCH-0017-01	Recessed installation housing, pre-assembly from factory	for LuxBeat XL 500 – Inground
		AUN-RCH-0018-XX	Recessed installation housing, including trim, pre-assembly from factory	for LuxBeat XL 500 – Inground
		AUN-RCH-0019-01	Recessed installation housing, pre-assembly from factory	for LuxBeat XL 1000 – Inground
		AUN-RCH-0020-XX	Recessed installation housing, including trim, pre-assembly from factory	for LuxBeat XL 1000 – Inground
Tree strap				
		AUN-TRS-0001-00	Tree strap, small mounting base	for ATHLON, ALPHA, SONIC, SPOTT, TELESCOPE

Ordering Code		Product Name		
Tree strap				
		AUN-TRS-0002-00	Tree strap, big mounting base	for ALPHA, SONIC, SPOTT
		AUN-TRS-0003-01	Tree strap, small mounting base	for ALPHA
		AUN-TRS-0004-00	Tree strap	for ATOM, ALPHA, KUBIK
		AUN-TRS-0005-00	Tree strap	for Mini KUBIK

OPTICAL ACCESSORY

Glare Shield Cap and Barn Door			
		AUN-GHS-0001-XX Glare shield cap	for Mini SONIC
		AUN-GHS-0002-XX Glare shield cap	for Medium SONIC
		AUN-GHS-0003-XX Glare shield cap	for Mega SONIC
		AUN-GSH-0006-06 Uplight shield, LED, pre-assembly from factory	for NeoPLACE
		AUN-GHS-0007-XX Glare shield cap	for KUBIK
		AUN-GHS-0008-XX Glare shield cap	for CANNON 280
		AUN-GHS-0009-XX Glare shield cap	for CANNON 360
		AUN-GHS-0015-XX Glare shield cap	for Mini KUBIK
		AUN-GHS-0016-00 Glare shield ring, COB	for Maxi CORE, Maxi TUBE, Medium TUBE, Medium SONIC
		AUN-GHS-0017-00 Glare shield louver, Bi-Symmetric beam	not for SIRIUS underwater, not for SIRIUS HI, for SIRIUS 600
		AUN-GHS-0018-00 Glare shield louver, Asymmetric beam	not for SIRIUS underwater, not for SIRIUS HI, for SIRIUS 600
		AUN-GHS-0019-00 Glare shield louver, Bi-Symmetric beam	not for SIRIUS underwater, not for SIRIUS HI, for SIRIUS 1200
		AUN-GHS-0020-00 Glare shield louver, Asymmetric beam	not for SIRIUS underwater, not for SIRIUS HI, for SIRIUS 1200
		AUN-GHS-0021-XX Glare shield cap	for Micro KUBIK
		AUN-GHS-0022-00 Glare shield ring, COB	for CANNON 280, Maxi CORE, Maxi TUBE, Mega SONIC

Ordering Code		Product Name		
Glare Shield Cap and Barn Door				
		AUN-GHS-0023-00	Glare shield louver, Bi-Symmetric beam	not for SIRIUS underwater, not for SIRIUS HI, for SIRIUS 300
		AUN-GHS-0024-00	Glare shield louver, Asymmetric beam	not for SIRIUS underwater, not for SIRIUS HI, for SIRIUS 300
		AUN-GHS-0025-00	Glare shield ring, COB	for KUBIK, Maxi CORE, Maxi TUBE, Medium TUBE, Medium SONIC, SHOOTER, SPOTT
		AUN-GHS-0026-XX	Glare shield cap	for Mini Slim KUBIK
		AUN-GHS-0027-XX	Glare shield cap	for Mini ALPHA Round
		AUN-GHS-0028-XX	Glare shield cap	for Medium ALPHA Round
		AUN-GHS-0029-XX	Glare shield cap	for Mini ALPHA Square
		AUN-GHS-0030-XX	Glare shield cap	for Mini ALPHA Square – ID
		AUN-GHS-0031-XX	Glare shield cap	for Medium ALPHA Square
		AUN-GHS-0032-XX	Glare shield cap, pre-assembly from factory	for NEOS
		AUN-GHS-0033-XX	Glare shield cap	for Mini SPACE
		AUN-GHS-0035-XX	Glare shield cap, pre-assembly from factory	for ATHLON
		AUN-GSH-0025-XX	Snoot	for Mini SPACE
		AUN-GSH-0026-XX	Snoot	for Medium SPACE
		AUN-GSH-0036-01	Barn door shield	for KUBIK
		AUN-GSH-0038-XX	Short snoot, LED, pre-assembly from factory	for Micro ALPHA Round Snoot
		AUN-GSH-0042-XX	Uplight shield cover, pre-assembly from factory	For CASA Bollard
		AUN-GSH-0048-XX	Glare shield cap, pre-assembly from factory	Medium CETUS
		AUN-GSH-0050-XX	Snoot, pre-assembly from factory	Medium CETUS
		AUN-GSH-0053-XX	Glare shield cap	for VELA
Honey Comb Louver				
		AUN-GSH-0003-01	Honeycomb louver, LED, pre-assembly from factory	for ZET Round, ZET Square

Ordering Code		Product Name	
Honey Comb Louver			
	AUN-GSH-0004-00	Honeycomb louver, LED, symmetric beam, pre-assembly from factory	for Mini Quark Square
	AUN-GSH-0005-00	Honeycomb louver, LED, symmetric beam, pre-assembly from factory	for Mini Quark Round
	AUN-GSH-0007-00	Honeycomb louver, LED, pre-assembly from factory	for Mini ALPHA Square
	AUN-GSH-0008-00	Honeycomb louver, LED, pre-assembly from factory	for ACQUA, Mini ALPHA Round, Mini KUBIK, ZET
	AUN-GSH-0010-00	Honeycomb louver, LED, pre-assembly from factory	not for SIRIUS underwater, for SIRIUS 600
	AUN-GSH-0011-00	Honeycomb louver, LED, pre-assembly from factory	not for SIRIUS underwater, for SIRIUS 1200
	AUN-GSH-0012-00	Honeycomb louver, LED, pre-assembly from factory	for KUBIK, Medium ALPHA Round, Medium TUBE, SHOOTER, VAREE
	AUN-GSH-0013-00	Honeycomb louver, LED, pre-assembly from factory	for Medium ALPHA Square
	AUN-GSH-0014-00	Honeycomb louver, LED, pre-assembly from factory	for TELESCOPE
	AUN-GSH-0015-00	Honeycomb louver, LED, pre-assembly from factory	for Micro ALPHA Round Snoot
	AUN-GSH-0016-00	Honeycomb louver, LED, pre-assembly from factory	for Micro ALPHA Round
	AUN-GSH-0017-00	Honeycomb louver, LED, pre-assembly from factory	for VOLGA
	AUN-GSH-0018-00	Honeycomb louver, LED, pre-assembly from factory	not for SIRIUS underwater, for SIRIUS 300
	AUN-GSH-0019-00	Honeycomb louver, LED, pre-assembly from factory	not for SIRIUS underwater, for SIRIUS HI 600
	AUN-GSH-0020-00	Honeycomb louver, LED, pre-assembly from factory	not for SIRIUS underwater, for SIRIUS HI 1200
	AUN-GSH-0021-00	Honeycomb louver, LED, pre-assembly from factory	for ARC, Medium ALPHA Round, ZET
	AUN-GSH-0022-00	Honeycomb louver, LED, pre-assembly from factory	for Mini Slim KUBIK
	AUN-GSH-0023-00	Honeycomb louver, COB, pre-assembly from factory	for Mini SPACE
	AUN-GSH-0024-00	Honeycomb louver, COB, pre-assembly from factory	for Medium SPACE
	AUN-GSH-0027-00	Honeycomb louver, RGBW, pre-assembly from factory	for ARC – CC
	AUN-GSH-0028-00	Honeycomb louver, LED, pre-assembly from factory	for Mini SPACE

Ordering Code		Product Name	
Honey Comb Louver			
		AUN-GSH-0029-00	Honeycomb louver, LED, pre-assembly from factory for Medium SPACE
		AUN-GSH-0030-00	Honeycomb louver, RGBW, pre-assembly from factory for Mini SPACE – CC, SHOOTER
		AUN-GSH-0043-00	Honeycomb louver, COB, pre-assembly from factory for CETUS, Mini KUBIK
Eyelid			
		AUN-MIS-0020-01	Eyelid, pre-assembly from factory for ATOM
Softening Filter			
		AUN-SOF-0015-00	Softening filter, LED, pre-assembly from factory for Mini Quark Square
		AUN-SOF-0016-00	Softening filter, LED, pre-assembly from factory for Mini Quark Round
		AUN-SOF-0017-00	Softening filter, LED, pre-assembly from factory for VAREE
		AUN-SOF-0018-00	Softening filter, LED, pre-assembly from factory for ATHLON
		AUN-SOF-0020-00	Softening filter, LED, pre-assembly from factory for ZET Round, ZET Square
		AUN-SOF-0021-00	Softening filter, LED, pre-assembly from factory for Mini ALPHA Square
		AUN-SOF-0022-00	Softening filter, LED, pre-assembly from factory for ACQUA, Mini ALPHA Round, Mini KUBIK, ZET
		AUN-SOF-0024-00	Softening filter, LED, pre-assembly from factory not for SIRIUS underwater, for SIRIUS 600
		AUN-SOF-0025-00	Softening filter, LED, pre-assembly from factory not for SIRIUS underwater, for SIRIUS 1200
		AUN-SOF-0026-00	Softening filter, LED, pre-assembly from factory for KUBIK, Medium ALPHA Round, Medium TUBE, SHOOTER, VAREE
		AUN-SOF-0027-00	Softening filter, LED, pre-assembly from factory for Micro ALPHA Round
		AUN-SOF-0028-00	Softening filter, LED, pre-assembly from factory for Medium ALPHA Square
		AUN-SOF-0029-00	Softening filter, LED, pre-assembly from factory for VOLGA
		AUN-SOF-0030-00	Softening filter, LED, pre-assembly from factory for Mini SKUNA
		AUN-SOF-0031-00	Softening filter, LED, pre-assembly from factory for Medium SKUNA

Ordering Code		Product Name	
Softening Filter			
		AUN-SOF-0032-00	Softening filter, LED, pre-assembly from factory for VAREE
		AUN-SOF-0033-00	Softening filter, LED, pre-assembly from factory not for SIRIUS underwater, for SIRIUS 300
		AUN-SOF-0055-00	Softening filter, LED, pre-assembly from factory for ATOM

POLE

Pole Array and Short Pole			
		AUN-POL-0025-XX	Pole array for 2 projector for KUBIK, Mega SONIC
		AUN-POL-0026-XX	Pole array for 4 projector for KUBIK, Mega SONIC
		AUN-POL-0027-XX	Pole array for 6 projector for KUBIK, Mega SONIC
		AUN-POL-0030-XX	Cylindrical aluminium pole, diameter 140mm, H= 410mm, use with projector for SPACE
		AUN-POL-0031-XX	Aluminum bollard tube, diameter 76mm, H= 833mm, with internal anchorage unit for Medium CAP
		AUN-POL-0032-XX	Aluminum bollard tube, diameter 76mm, H= 833mm, with flange base for Medium CAP
		AUN-POL-0033-XX	Aluminum bollard tube, diameter 76mm, H= 2500mm, for Medium CAP
		AUN-POL-0034-XX	Cylindrical aluminium pole, diameter 140mm, H= 410mm, use with RGBW projector for SPACE – CC
		AUN-POL-0043-XX	Cylindrical aluminium pole, diameter 105mm, H= 522mm, [pre-assembled from factory] for CETUS, Medium ALPHA Round – ID
		AUN-POL-0044-XX	Cylindrical aluminium pole, diameter 105mm, H= 522mm, 1-10V / DALI [pre-assembled from factory] for CETUS, Medium ALPHA Round – ID
		AUN-POL-0188-XX	Cylindrical aluminium pole, diameter 105mm, H= 522mm, [pre-assembled from factory] for Mini ALPHA Round – ID

IP54	Degree of protection	IK 09 06	Impact resistant Body (Upper) Optic (Lower)	3 SDCM	3 steps MacAdam ellipse		RGBW
IP55	Degree of protection	IK 09 07	Impact resistant Body (Upper) Optic (Lower)	4 SDCM	4 steps MacAdam ellipse		DMX/RGBW
IP65	Degree of protection	IK 09 08	Impact resistant Body (Upper) Optic (Lower)	5 SDCM	5 steps MacAdam ellipse		Motion Sensor
IP66	Degree of protection	IK 09 09	Impact resistant Body (Upper) Optic (Lower)	CRI >40	Color Rendering Index		On/Off
IP67	Degree of protection	IK 09 10	Impact resistant Body (Upper) Optic (Lower)	CRI >70	Color Rendering Index		Dimmable 1-10V
IP68	Degree of protection	IK 10 06	Impact resistant Body (Upper) Optic (Lower)	CRI >80	Color Rendering Index		DALI
IK 05 07	Impact resistant Body (Upper) Optic (Lower)	IK 10 07	Impact resistant Body (Upper) Optic (Lower)		AC COB module		On/Off [AC LED]
IK 07 07	Impact resistant Body (Upper) Optic (Lower)	IK 10 08	Impact resistant Body (Upper) Optic (Lower)		Input Voltage		On/Off / DALI
IK 07 09	Impact resistant Body (Upper) Optic (Lower)	IK 10 09	Impact resistant Body (Upper) Optic (Lower)		Input Voltage		On-Off with Microwave sensor
IK 08	Impact resistant Body (Upper) Optic (Lower)	IK 10 10	Impact resistant Body (Upper) Optic (Lower)		Input Voltage	DMX	DMX
IK 08 06	Impact resistant Body (Upper) Optic (Lower)		Class I		Input Current	CASAMBI	CASAMBI
IK 08 07	Impact resistant Body (Upper) Optic (Lower)		Class II		Input Current	Remote	Remote
IK 08 08	Impact resistant Body (Upper) Optic (Lower)		Class III		Input Current		
IK 08 09	Impact resistant Body (Upper) Optic (Lower)		CE mark		Input Current		
IK 08 10	Impact resistant Body (Upper) Optic (Lower)		LED Lamp type		Input Current		

IP Rating

It is the designation system to indicate the degrees of protection of the luminaire against ingress of solid foreign bodies and harmful ingress of water. It consists of the characteristic letters IP followed by two numerals indicating conformity with the conditions stated in table below.

First numeral	Explanation	Second numeral	Explanation
0	Non-protected	0	Non-protected
1	Protected against solid objects greater than 50 mm.	1	Protected against dripping water
2	Protected against solid objects greater than 12 mm.	2	Protected against dripping water when tilted up to 15°
3	Protected against solid objects greater than 2.5 mm.	3	Protected against spraying water
4	Protected against solid objects greater than 1 mm.	4	Protected against splashing water
5	Dust-protected	5	Protected against water jets
6	Dust-tight	6	Protected against heavy seas
		7	Protected against temporary immersion
		8	Protected against continuous submersion

IK Rating

It is the designation system to indicate the degrees of protection of the luminaire against harmful external mechanical impacts. It is indicated by the code letters (IK) and followed by characteristic group numeral (from 00 to 10). Each characteristic group numeral represents an impact energy value as shown in table below.

Relation between IK rate and impact energy (in joules).		
IK Rate	Impact energy, J	Explanation
IK 00	Non-protected	
IK 01	0.14	Resistant against an impact from an object of 200 grams thrown from a distance of 7.5 cm.
IK 02	0.2	Resistant against an impact from an object of 200 grams thrown from a distance of 10 cm.
IK 03	0.35	Resistant against an impact from an object of 200 grams thrown from a distance of 17.5 cm.
IK 04	0.5	Resistant against an impact from an object of 200 grams thrown from a distance of 25 cm.
IK 05	0.7	Resistant against an impact from an object of 200 grams thrown from a distance of 35 cm.
IK 06	1	Resistant against an impact from an object of 500 grams thrown from a distance of 20 cm.
IK 07	2	Resistant against an impact from an object of 500 grams thrown from a distance of 40 cm.
IK 08	5	Resistant against an impact from an object of 1.7 kg. thrown from a distance of 29.5 cm.
IK 09	10	Resistant against an impact from an object of 5 kg. thrown from a distance of 20 cm.
IK 10	20	Resistant against an impact from an object of 5 kg. thrown from a distance of 40 cm.

Protection against electrical shock

Luminaires are classified according to the type of protection against electrical shock provided as Class I, Class II and Class III.

Class	Symbol	Explanation
Class I		Luminaire is provided for the connection of accessible conductive parts to The protective (earthing) conductor in the fixed wiring installation.
Class II		An additional protective insulation is provided apart from functional insulation. Under any fault condition, no dangerous voltage can reach metal parts.
Class III		Luminaire in which protection against electrical shock relies on supply at Safety extra-low voltage.

Handwriting practice lines consisting of 28 horizontal dotted lines.

Blank lined paper for writing.



CONTACT US

Unilamp Co.,Ltd.

unilamp@unilamp.co.th
online@unilamp.co.th

www.unilamp.co.th

THAILAND

Sale office and showroom:

461 Ramintra Road, Kannayao,
Bangkok 10230 Thailand
Tel: +66(0)2 943 2420-1, +66(0)2 946 4170-1
Fax: +66(0)2 943 2419

Warehouse:

2519 Ladprao 79, Ladprao Road,
Wangthonglang, Bangkok 10310 Thailand
Tel: +66(0)84 427 7235

Factory 1:

25 Moo 11 Tambol Bansang,
Amper Bansang, Prachinburi 25150 Thailand
Tel: +66(0)89 900 5904

Factory 2:

29 Moo 3 Tambol Bansang,
Amper Bansang, Prachinburi 25150 Thailand
Tel: +66(0)85 133 5904

UNITED ARAB EMIRATES (FZE)

Sale support office:

Sharjah Airport International Freezone,
Sharjah, United Arab Emirates
Contact Person: Mr. Afham Adam
Tel: +971 54 796 1356
E-mail: afham@unilamp.co.th

SAARC

Sale support office:

A-31/S-1 [Block A],
Dilshard Garden, Delhi 110095
Contact Person: Mr. Deepanshu Biswas
Tel: +91 9871135550
E-mail: deepanshu_b@unilamp.co.th

INDONESIA

Sale support office:

Grand Slipi Tower Lt. 9, Unit G, Jl. Letjen, S.Parmar Kav.
22-24, Palmerah, Jakarta Barat, Indonesia 11480
Contact person: Nattacha Triamornlert
E-mail: nattacha@unilamp.co.th

PHILIPPINES

Sale support office:

353 M.L. Quezon St. Lower Bicutan Taguig City, Philippines
Contact Person: Ms. Sherwin Sajul
Tel: +63 916 445 7515
E-mail: sherwin@unilamp.co.th

NORWAY

Associate Company:

UNILAMP NORDEN AS
INDUSTRIVEIEN 11 1481 HAGAN, NORWAY
Tel: +47 67 49 47 70
Tel: +47 22 32 50 22
Website: <https://www.unilamp.no>

Follow us on ...



<https://www.facebook.com/UnilampThailand/>



<https://www.instagram.com/unilamp.thailand/>



<https://www.linkedin.com/company/unilamp/>



Unilamp Thailand

**DUE TO THE CONSTANCY OF PRODUCT DEVELOPMENT,
WE RESERVE THE RIGHT TO ALTER ALL SPECIFICATION
WITHOUT PRIOR NOTICE.**

**PLEASE CHECK PRODUCT AVAILABILITY AND UPDATES
ON OUR WEBSITE OR SALES REPRESENTATIVE.**

Last update on 12/07/2024



LED LUMINAIRES

2025/2026